## **10X8X2 PREMIUM LINE**





## **PREMIUM** POLYCARBONATE ENCLOSURE

## **Features and Benefits**

- 16 Standard configurations including hinged or non-hinged lids in 2-screw, 4-screw, or stainless steel metal latched lids.
- Standard color light gray with a gloss finish.
- Best material bases, opaque covers and clear covers are all made of high-impact, UV resistant polycarbonate.
- Easy ordering one part number includes base, lid, mounting feet or flanges and all lid fastening hardware (mounting panels sold separately).
- Flexible interior mounting features the unique and patented Integra adjustable depth "T-Rail" back panel mounting system (back panel and adjustable brackets sold separately).
- Features multiple bosses for easy installation of devices and DIN rails.
- UL-50 / c-UL Listed (files # E229365, # E207562)

Our Premium Line enclosures are the most durable, aesthetically pleasing, non-metallic Nema UL rated enclosures available. From the extremely versatile mounting options inside the enclosure to having the most off-the-shelf accessories, the Integra "Made In the USA" Premium Line enclosures provide great value to any application.

| Mechanical and Thermal           | Test Spec. | Unit   | Premium Line |
|----------------------------------|------------|--------|--------------|
| Instrumented Dart Impact @ 73° F |            | in/lb. | 565          |
| Falling Ball Impact @ 73° F      | UL-746     | in/lb. | 900          |
| Deflection Temperature @ 264 psi | ASTM D648  | Deg. F | 270          |
| Modulus of Elasticity            | ASTM D790  | ksi    | 340          |
| Temperature Range                |            | Deg. F | -40 to 265   |
| Flammable / UV Ratings           | Test Spec. | Unit   | Premium Line |
| Flame Rating - UL                | UL 94      | -      | 5VA          |
| Outdoor UV Exposure              | UL         | -      | F1           |

| 10082 P/N    | 4X<br>IP66   | 6P<br>IP68   | Hinged<br>Cover | Screw<br>Cover | Opaque<br>Cover | Clear<br>Cover | Mounting<br>Feet | Mounting<br>Flange | Stainless Steel<br>Locking Latch | T-Rail<br>System |
|--------------|--------------|--------------|-----------------|----------------|-----------------|----------------|------------------|--------------------|----------------------------------|------------------|
| H10082S      | $\checkmark$ | $\checkmark$ |                 | $\checkmark$   | $\checkmark$    |                | $\checkmark$     |                    |                                  | $\checkmark$     |
| H10082SC     | $\checkmark$ | $\checkmark$ |                 | $\checkmark$   |                 | $\checkmark$   | $\checkmark$     |                    |                                  | $\checkmark$     |
| H10082SF     | $\checkmark$ | $\checkmark$ |                 | $\checkmark$   | $\checkmark$    |                |                  | $\checkmark$       |                                  | $\checkmark$     |
| H10082SCF    | $\checkmark$ | $\checkmark$ |                 | $\checkmark$   |                 | $\checkmark$   |                  | $\checkmark$       |                                  | $\checkmark$     |
| H10082H      | $\checkmark$ |              | $\checkmark$    | $\checkmark$   | $\checkmark$    |                | $\checkmark$     |                    |                                  | $\checkmark$     |
| H10082HC     | $\checkmark$ |              | $\checkmark$    | $\checkmark$   |                 | $\checkmark$   | $\checkmark$     |                    |                                  | $\checkmark$     |
| H10082HF     | $\checkmark$ |              | $\checkmark$    | $\checkmark$   | $\checkmark$    |                |                  | $\checkmark$       |                                  | $\checkmark$     |
| H10082HCF    | $\checkmark$ |              | $\checkmark$    | $\checkmark$   |                 | $\checkmark$   |                  | $\checkmark$       |                                  | $\checkmark$     |
| H10082HLL    | $\checkmark$ |              | $\checkmark$    |                | $\checkmark$    |                | $\checkmark$     |                    | $\checkmark$                     | $\checkmark$     |
| H10082HCLL   | $\checkmark$ |              | $\checkmark$    |                |                 | $\checkmark$   | $\checkmark$     |                    | $\checkmark$                     | $\checkmark$     |
| H10082HFLL   | $\checkmark$ |              | $\checkmark$    |                | $\checkmark$    |                |                  | $\checkmark$       | $\checkmark$                     | $\checkmark$     |
| H10082HCFLL  | $\checkmark$ |              | $\checkmark$    |                |                 | $\checkmark$   |                  | $\checkmark$       | $\checkmark$                     | $\checkmark$     |
| H10082H-6P   | $\checkmark$ | $\checkmark$ | $\checkmark$    | $\checkmark$   | $\checkmark$    |                | $\checkmark$     |                    |                                  | $\checkmark$     |
| H10082HC-6P  | $\checkmark$ | $\checkmark$ | $\checkmark$    | $\checkmark$   |                 | $\checkmark$   | $\checkmark$     |                    |                                  | $\checkmark$     |
| H10082HF-6P  | $\checkmark$ | $\checkmark$ | $\checkmark$    | $\checkmark$   | $\checkmark$    |                |                  | $\checkmark$       |                                  | $\checkmark$     |
| H10082HCF-6P | $\checkmark$ | $\checkmark$ | $\checkmark$    | $\checkmark$   |                 | $\checkmark$   |                  | $\checkmark$       |                                  | $\checkmark$     |

 Corres with feet or flanges.

 Image: Corres with feet or flanges.

RoHS

Atex pending, contact factory for details


目


1


TORQUE SPECIFICATIONS - Mounting Brackets - 1/4"-20 x 0.25 SS, countersunk phillips drive screws (torque limit = 20 in. lbs.) | Covers / Doors - Torque for corner screws is 10 in. lbs.



## **10X8X2 PREMIUM LINE**

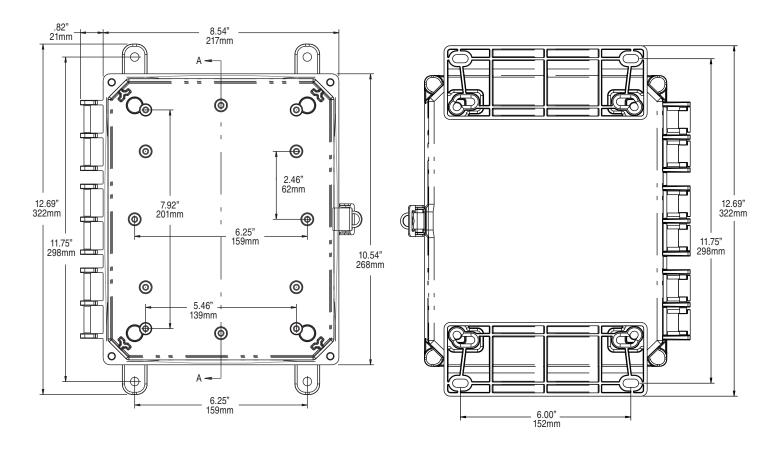

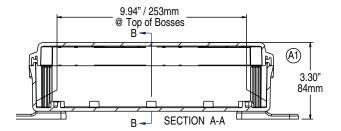

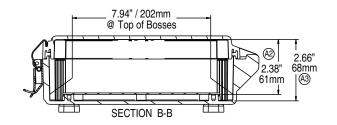

Register online to download this drawing off the Integra website at www.integraenclosures.com | Your company's logo or other information on the lid. Consult factory for details.

| Accessories for 10x8x2 (For complete accessories, see page 49-52) |   |  |  |        |  |  |  |
|---|---|--|--|--------|--|--|--|
|   | Back Panels<br>ABP1082 - Aluminum panel<br>SBP1082 - Steel panel<br>PVCBP1082 - PVC panel |  | Aluminum Swing Out Panels<br>ABP-108USP/USOPK -<br>Complete panel kit<br>ABP-108USP - Aluminum swing<br>out panels only<br>USOPK - Hardware only | THE ST | Back Panel Adjustment Kit<br>BPAKG - Gray, Set Screw<br>BPAKB - Black, Set Screw<br>UBPAKG - Gray, Thumb Screw<br>UBPAKB - Black Thumb Screw |  |  |
|   | Air Vents<br>VENT 1 - Aluminum louvered<br>VENT 2 - Outdoor labyrinth                     |  | Steel Swing Out Panels<br>SBP-108USP/USOPK -<br>Complete panel kit<br>BSP-108USP - Steel swing out<br>panels only<br>USOPK - Hardware only       | 22     | <b>Cord Grips</b><br>IP68/NEMA 4X/6P rated<br>See page 54 for more details<br>and part numbers.  |  |  |
| TTTT  | Din Rail<br>DIN 8 - 2 rails, 4 screws   |  | Pole Mounting Kit<br>PMKG-28 - 2" pole<br>PMKG-38 - 3" pole<br>PMKG-48 - 4" pole<br>PMKG-128 - 12" pole  |        | Mounting Feet & Flange Kits<br>MFKG - Premium line feet<br>MFKSS - Stainless steel feet<br>MFLK8 - 8" Flange kit                             |  |  |