
## **14X12X6 PREMIUM LINE**















Atex pending, contact factory for details

## PREMIUM POLYCARBONATE ENCLOSURE

## **Features and Benefits**

- 16 Standard configurations including hinged or non-hinged lids in 2-screw, 4-screw, or stainless steel metal latched lids.
- Standard color light gray with a gloss finish.
- Best material bases, opaque covers and clear covers are all made of high-impact, UV resistant polycarbonate.
- Easy ordering one part number includes base, lid, mounting feet or flanges and all lid fastening hardware (mounting panels sold separately).
- Flexible interior mounting features the unique and patented Integra adjustable depth "T-Rail" back panel mounting system (back panel and adjustable brackets sold separately).
- Features multiple bosses for easy installation of devices and DIN rails.
- UL-50 / c-UL Listed (files # E229365, # E207562)

Our Premium Line enclosures are the most durable, aesthetically pleasing, non-metallic Nema UL rated enclosures available. From the extremely versatile mounting options inside the enclosure to having the most off-the-shelf accessories, the Integra "Made In the USA" Premium Line enclosures provide great value to any application.


Mechanical and Thermal	Test Spec.	Unit	Premium Line	
Instrumented Dart Impact @ 73° F		in/lb.	565	
Falling Ball Impact @ 73° F	UL-746	in/lb.	900	
Deflection Temperature @ 264 psi	ASTM D648	Deg. F	270	
Modulus of Elasticity	ASTM D790	ksi	340	
Temperature Range		Deg. F	-40 to 265	
Flammable / UV Ratings	Test Spec.	Unit	Premium Line	
Flame Rating - UL	UL 94	-	- 5VA	
Outdoor UV Exposure	UL	-	F1	

141206 P/N	4X IP66	6P IP68	Hinged Cover	Screw Cover	Opaque Cover	Clear Cover	Mounting Feet	Mounting Flange	Stainless Steel Locking Latch	T-Rail System
H141206S	✓	✓		✓	✓		✓			✓
H141206SC	✓	✓		✓		✓	✓			✓
H141206SF	✓	✓		✓	✓			✓		✓
H141206SCF	✓	✓		✓		✓		✓		✓
H141206H	✓		✓	✓	✓		✓			✓
H141206HC	✓		✓	✓		✓	✓			✓
H141206HF	✓		✓	✓	✓			✓		✓
H141206HCF	✓		✓	✓		✓		✓		✓
H141206HLL	✓		✓		✓		✓		✓	✓
H141206HCLL	✓		✓			✓	✓		✓	✓
H141206HFLL	✓		✓		✓			✓	✓	✓
H141206HCFLL	✓		✓			✓		✓	✓	✓
H141206H-6P	✓	✓	✓	✓	✓		✓			✓
H141206HC-6P	✓	✓	✓	✓		✓	✓			✓
H141206HF-6P	✓	✓	✓	✓	✓			✓		✓
H141206HCF-6P	✓	✓	✓	✓		✓		✓		✓

TORQUE SPECIFICATIONS - Mounting Brackets - 1/4"-20 x 0.25 SS, countersunk phillips drive screws (torque limit = 20 in. lbs.) | Covers / Doors - Torque for corner screws is 10 in. lbs.



## **14X12X6 PREMIUM LINE**

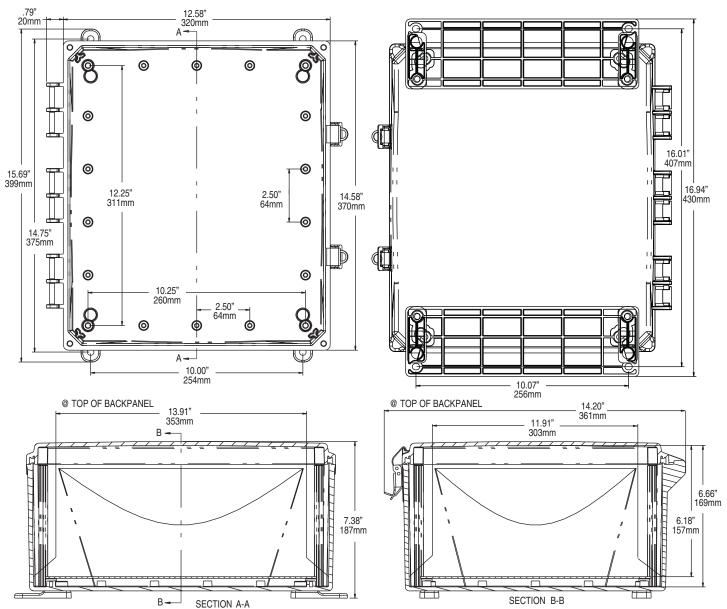

Register online to download this drawing off the Integra website at www.integraenclosures.com | Your company's logo or other information on the lid. Consult factory for details.

