

Safety relay for coded magnetic switches



MANY BENEFITS AT A GLANCE

- TÜV type-tested safety monitoring system
- Connection for 1 or 2 coded magnetic switches
- Performance level d according to EN ISO 13849-1
- SIL 3 according to EN 61508/EN 62061
- Single-fault safety S according to EN 60947-5-3



Technical data

Electrical data


Operating voltage	24 V DC
Switching voltage of the safety output	250 V AC
Switching current of the safety output	8 A

Mechanical data

Enclosure material	PC
Ambient temperature	0°C to + 55°C
Protection class	IP20

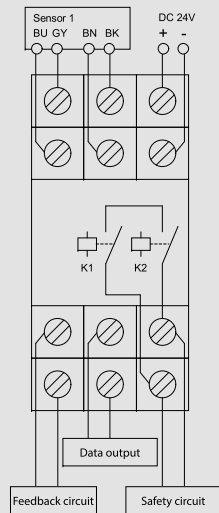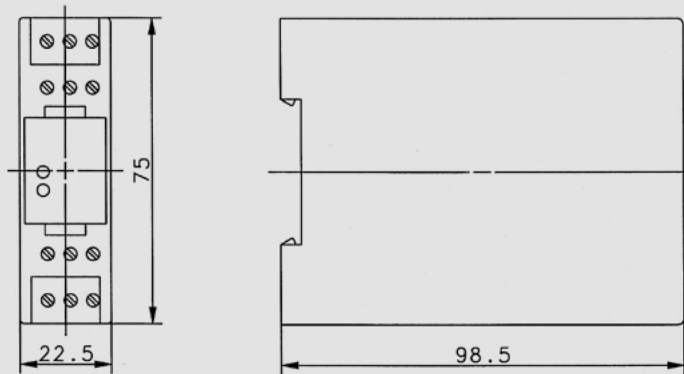

MÜZ-102

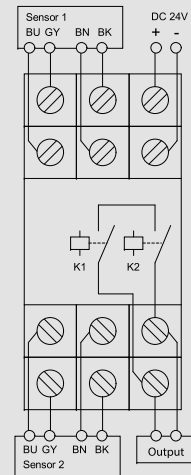

MÜZ-202

Product selection

Article number	Designation	Connectable MAK	Feedback circuit	Data output (NC contact)
6392701306	MÜZ-102/D24-FL-DA	1	Yes	Yes
6392702307	MÜZ-202/D24-FL	2	No	No

