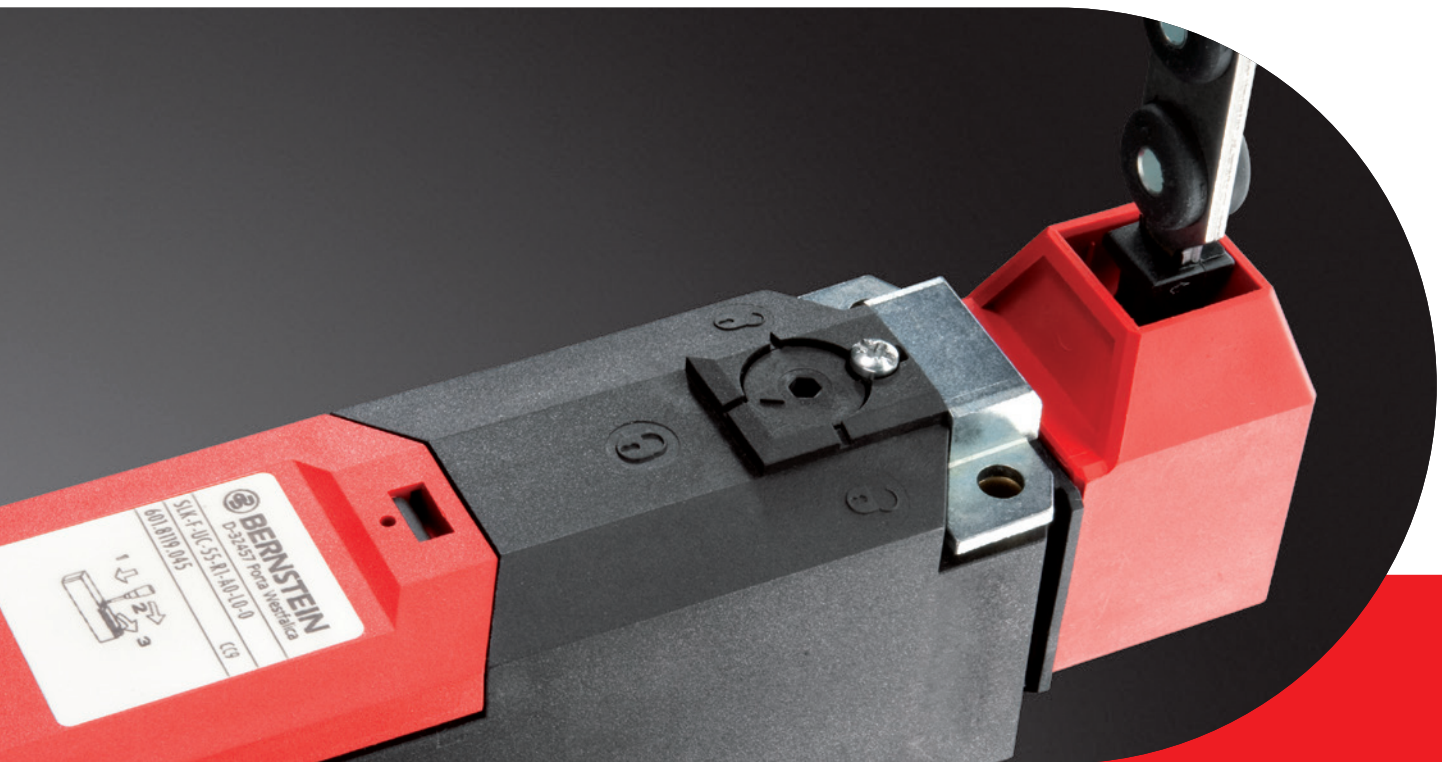




**Complete Range
Switch Systems and safety technology**



BERNSTEIN AG – A Success Story



Safety for man and machine

BERNSTEIN AG ranks among the world's leading providers of industrial **safety technology**. With our comprehensive range of **switches, sensors, enclosures, suspension systems** and other components for industrial applications, we offer our customers effective and versatile solutions.

In-depth market knowledge, the close proximity to end users as well as years of experience in mechanical engineering and electronics are reflected down to the last detail in our products.

By conforming to international safety guidelines, our products perfectly integrate in individual solutions. Our focus is complete commitment to safety for man, machine and industrial processes.

Our expertise for your safety

With sound application expertise we support our customers from all branches of industry in the planning and implementation of systems designed to meet stringent safety requirements. In addition to classic **plant and machine construction**, we look after customers in the **lift construction, automotive, agriculture, conveyor construction, automation engineering, wood-working, renewable energy, medical technology industries, AS-Interface** and **ATEX**.



**Our knowledge
is your success**

Our philosophy

Customer Satisfaction is our number one priority. For us, **Quality** is more than making a good product, it's about designing them to perfectly match ALL of your needs.

Customized Solutions are fully integrated into our business and form part of our everyday working life. Employees are treated as our greatest asset as they are responsible for the quality and success of our products. All **BERNSTEIN TEAM** members are trained and educated to the highest possible standard so they can deliver **"Best in Class" Service and Support**. The BERNSTEIN TEAM will support you both personally and professionally, working together we will provide you with the **best Safe Solution** – for any size of project.

Future-proof solutions

Our objective is to actively influence technical innovation and modern application solutions. BERNSTEIN has therefore always been at the centre of defining trends in technology. With an unwavering commitment to the future we will continue providing the best possible answers in terms of technology, ecology and economic efficiency.

That is our definition of progress!

BERNSTEIN AG

The Product Lines

Switch Systems



Switch systems – Economy meets safety

BERNSTEIN electromechanical switches offer a convincing price / performance ratio and impress with their extreme reliability for many different operating voltages. The range extends from limit switches, encapsulated in insulating material or metal, through foot switches to safety switching devices. The AS-i compatible products save time and material in installation and provide cost advantages in operation. The comprehensive range of designs and sizes, the possible switching functions and the choice of actuators make virtually any application reality.

Sensor Systems



Sensor systems – Compact intelligence

The extremely fast and exceptionally precise BERNSTEIN sensors operate without interference and wear in all applications. The tried-and-tested reliability and the compact dimensions are greatly appreciated in all branches of industry. Matching the specific application, in addition to ultrasonic sensors and level switches, customers can choose from a wide range of inductive, capacitive, magnetic or optical sensors. Alongside the complete standard range of sensors, we also offer comprehensive development and design for individual solutions.

Enclosure Systems



Enclosure systems – Function and design

With its long tradition in manufacturing enclosures, BERNSTEIN combines superior enclosure technology, designed for encapsulating a diverse range of applications, with ultramodern and variable suspension systems. An extensive range of aluminium and plastic terminal boxes as well as the wiring and circuitry in standard and control enclosures conforming to specific customer requirements round off the product portfolio. Our enclosures conform to standards used in medical technology, industry as well as food and EX applications.

Product Line Switch Systems



Switch systems – Economy meets safety

BERNSTEIN AG is an established manufacturer of high quality electromechanical low voltage switching devices. Our products are used in the most diverse range of applications, ranging from lift construction through wood-working and packaging machines through to machine tools.

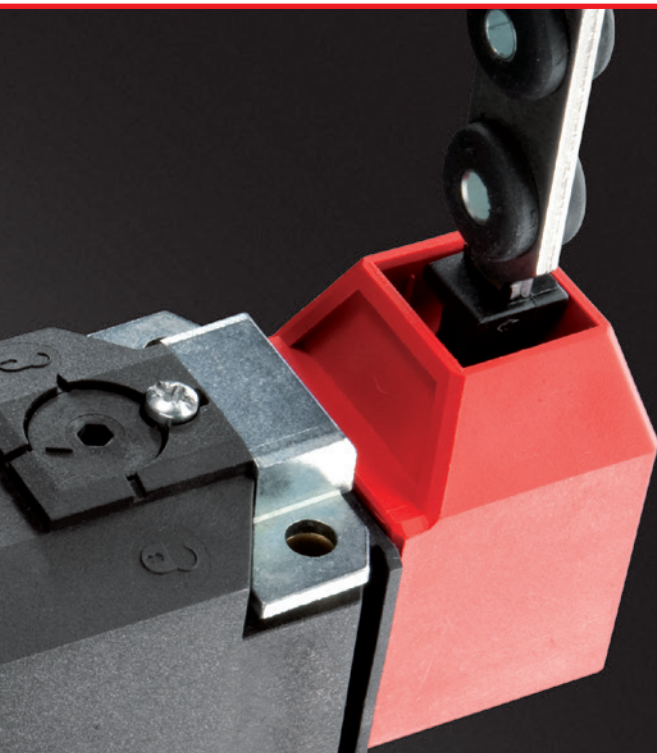
In addition to functional reliability and high quality, BERNSTEIN switch systems also efficiently save time in terms of installation and maintenance. These advantages further underscore the benefits for the end product as they drastically reduce downtime for servicing and maintenance purposes. This is achieved through features such as the quick-connect head for time-saving installation at rope pull switches or the AS interface components which, in addition to shortening installation times, also reduce the number of hardware components and the space requirements in machines.

Switches are an integral part of modern processes

The primary purpose of a switch is to convert mechanical movement into electrical signals that are processed in machine and process control systems. However, switches directly connected to bus systems are being used to an ever greater extent in modern applications where mechanical movement is converted into digital information.

Besides reducing costs, our AS interface switch components also offer advantages such as the diagnostic features and uncomplicated system expansion in process applications.

BERNSTEIN switches are configured by combining different types of enclosures, switch systems and actuators. Corresponding to the environmental and operating conditions, the switches are available in a metal or plastic enclosure.



The switching system is selected based on the function (slow-action or snap-action contact) and the required floating contacts. The actuator is also selected corresponding to the type and direction of actuation. Thanks to the large number of possible combinations, the scope of application is virtually unlimited.

The applications in which limit switches are used have changed in line with increasing automation. While not too long ago limit switches were mainly used for monitoring position, today they often additionally assume a safety function.

Complementing our product range we offer attractive customer services:

- Assistance in assessing risk and configuring safety functions
- Preassembly of products with standard power supply lines or customised cables
- Supply of completely preassembled wiring harnesses
- Component supplied with M12 connector
- Customised adaptation of products

Safety and Standard Switches

General

12

Safety and Standard Position Switches

Insulation-enclosed limit switches (plastic)



• C2

17



• T12

21



• IF

25



• I88

31



• SGS

37



• Bi2

38



• ENK

42

Metal-enclosed limit switches



• GC

46



• SN2

52



• ENM2

57



• D

62

Overview of actuators

66

Accessories

69

Electrical data

70



• SKC

77



Plastic/metal
various types
• VTW
• VTU

80

Safety Switches with Separate Actuator and Latching Device



Plastic
• SLK

84



Metal
• SLM

88

Safety Switches with Separate Actuator

Plastic



• SKT

74



• SKI

75



• SK

76

Safety Switches for Hinged Protective Equipment



• SHS3 92



• SHS 98



• I88 VKS, -VKW, -AHDB 102
GC VKS, -VKW
Ti2 AHDB

Contactless safety technology



General 108

CSMS 109
RFID
Safety sensor



Magnetic Monitoring Systems 113



Magnetic Safety Sensors 113

Safety Command Devices



Safety cable pull switches 116
• SRM
• SR



Rope pull switches spanned on both ends 122
• SiRK
• Si1
• Si2



Standard cable pull switches 126



Accessories for rope pull switches 133



Belt alignment switches 135



Foot switches 136
1–3 pedal

Safety Evaluation Devices




SCR Safety relays 143

Bus-Compatible Safety Switches – AS Interface



AS-Interface Safety at Work 144



AS-Interface Accessories 152

ATEX



ATEX Products 154

Common Features of Electromechanical Switches

Switching systems

Switching elements lie at the heart of all electromechanical switching devices and must correspond to the respective application. Essentially there are two basic types of switching system that differ in terms of their mechanical design and consequently their scope of application:

- Slow-action contacts
- Snap-action contacts

Slow-action contacts

- On actuation, the normally-closed and normally-open contact functions correspond to the movement of the impact pin
- The approach speed controls the contact opening (closing) time
- Large distance / actuating travel between normally-closed and normally-open contact function
- The switching points are identical in forward and reverse travel

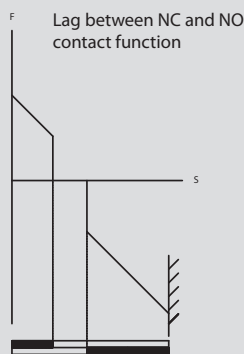


Fig. 1 shows the contact force during the switching cycle of a slow-action contact.

Overlap

- The switching principle of snap-action contacts makes overlapping of the NC / NO contact function possible. The term overlap refers to the area, in which both the normally-closed contact as well as the normally-open contact are closed in connection with a changeover switch with delay.




Fig. 2 shows the contact force during the switching cycle of a slow-action contact with overlap.

Snap-action contact

- On actuation, the normally-closed contact function is immediately followed by the normally-open contact function
- In this configuration there is no overlap of the NC/NO contacts. The switch provides a distinct OR-function.
- The changeover accuracy is not dependent on the approach speed
- Consistently effective suppression of DC arc
- Reliable contact-making also for extremely slow approach speeds
- The snap mechanism triggers the full opening width of the contact on reaching the changeover point
- Due to the force reversal in the mechanical system, a different switching point occurs in forward and reverse travel. The lag is referred to as hysteresis.

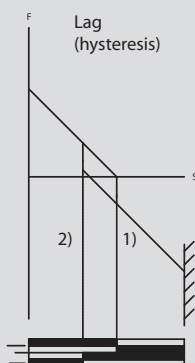


Fig. 3 shows the contact force during the switching cycle of a snap-action contact.


- 1) Changeover point in forward travel
- 2) Changeover point in reverse travel

Switching diagram

The switching diagram describes the function of the switching device in detail.

It combines the mechanical input variables that act on the contact system via the actuator with the electrical output variables. The user can deduct the following information from the switching diagram:

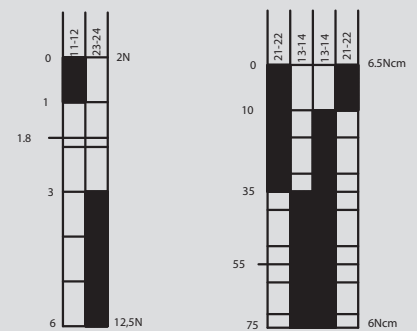- Mechanical input variables (force, travel, torque, angle)
- Electrical contact-making in forward and reverse travel
- Terminal designation
- Point at which positive opening is achieved
- Type of contact system



Slow-action contact Snap-action contact

- Contact closed
- Contact open

Contact designation

In accordance with DIN 50013 and DIN 50005 the terminal designations of the contact elements are always made up of two digits.

The contact rows are numbered consecutively with the allocating digit (1st digit) in actuation direction. Contacts of a switching element that belong together have the same allocating digit.

The second digit is the function digit that denotes the type of contact element.

- 1-2 Normally-closed contact
- 3-4 Normally-open contact
- 5-6 Normally-closed contact with delayed opening
- 7-8 Normally-open contact with delayed closing

Protection class

The protection class of an enclosed device denotes the degree of protection. The degree of protection includes the protection of persons against contact with parts under voltage and the protection of equipment against the infiltration of foreign bodies and water. BERNSTEIN standard enclosures mainly correspond to protection classes IP65 and IP67. Higher protection ratings are also available for individual customer solutions. In accordance with DIN EN 60521 (IEC 529), the numerals used in the protection rating denote the following:

1st digit Degree of protection against contact and infiltration of foreign bodies

2nd digit Degree of protection against infiltration of water

Example IP 65:

- 6 =** ● Complete protection against contact with components under voltage or with internal moving parts
- Protection against dust infiltration
- 5 =** ● A water jet directed from all directions at the device must not have damaging effects
- Protection against hose water

Designation

The designation of BERNSTEIN switching devices depends on:

- The enclosure designation of the switching device
- The switching function
- The type of actuator

Type code of position and safety switches

I88	A2Z ¹⁾	AH	M12
Switch group	Switching system ²⁾	Actuator	Special features
● C2	● U1	See Pages	● M12 connection
● Ti2	● SU1	66 – 67	● Actuator turned 90°, 180°, 270°
● IF	● A2		● Special switching forces
● I88	● SA2		● Special temperature ranges
● Bi2	● E2		● Other special features on request
● ENK	● SE2		
● GC			
● SN2			
● ENM2			
● D			

Enclosures

Limit switches are supplied either in a plastic enclosure or a metal enclosure. Which material is to be selected for a specific application depends on the ambient conditions, the location as well as several other factors.

Plastic limit switches provide protective insulation and are resistant to many aggressive chemicals and liquids. The formation of condensation water in moist environments with extreme temperature fluctuations is significantly reduced on plastic enclosures.

In insulation-enclosed switches the switching elements are integrated directly in the plastic enclosure and are therefore not replaceable (complete switching devices).

Metal-enclosed limit switches are able to withstand high mechanical loads, they can also be used wherever hot metal chips and sparks occur and are resistant to many solvents and detergents. The switching elements in metal-enclosed switches are often integrated in the metal enclosure as modular built-in switches. The enclosure has a VDE-compliant connection for the PE conductor.

Safety switches

The scope of application for limit switches has changed over time. Whereas limit switches were previously used for the purpose of detecting end positions, today they are increasingly assuming functions designed to protect persons and products in machine, equipment and plant construction.

The BERNSTEIN range of safety switches offers the right solution for the most diverse applications in many branches of industry. Particularly when it comes to safety, users appreciate the fact that they are able to procure all required safety switches and receive professional advice from one source.

The decisive factors governing the selection of safety equipment include the ambient conditions, installation situation and risk analysis.

A switching device that can be used for safety functions is identified by the standardised symbol conforming to EN 60947-5-1 Addendum K. The switches can, of course, also be used for pure position monitoring purposes.

Safety switches are divided into two categories, Type 1 and Type 2. The difference is in the actuating elements which are completely integrated in the enclosure in Type 1 and separated from the switching element in Type 2.



Type 1



Type 2

¹⁾ The letter Z suffix to the designation of the switching function denotes the mechanical positive opening action of the normally-closed contacts. In technical data sheets, the positive opening point is identified by the international symbol ➔.

²⁾ Please refer to the following pages in the catalogue to establish which switching system can be used in the switch groups.


Common Features of Electromechanical Switches

Switching function example

NC = Normally-closed contact
NO = Normally-open contact
V = Overlap


U1Z

Slow-action contact, 1 NC, 1 NO




SU1Z

Snap-action contact, 1 NC, 1 NO




A2Z

Slow-action contact, 2 NC




SA2Z

Snap-action contact, 2 NC




E2

Slow-action contact, 2 NO




SE2

Snap-action contact, 2 NO




UV1Z

Slow-action contact,
with overlapping contacts,
1 NC, 1 NO




U15Z

Slow-action contact, 2 NC, 1 NO




UV15Z

Slow-action contact,
with overlapping contacts,
2 NC, 1 NO




U16Z

Slow-action contact, 1 NC, 2 NO



UV16Z

Slow-action contact,
with overlapping contacts,
1 NC, 2 NO



The actuating forces and travel distances are subject to tolerances. These tolerances are listed in Table 1.
In Type 1 and Type 2 position switches, the tolerances are independent of the switching system and switching function.

Function	Tolerance
Switching travel	± 0.25 mm
Switching angle	± 3.5°
Switching force in N	± 10%
Actuating torque in	± 10%

Table 1

⊕ = **Mechanical positive opening action**

The term positive opening action refers to contact separation as the direct result of defined movement of the switch actuator by means of non-sprung parts. All parts involved in contact separation must be form-fit connected. The positive opening distance describes the minimum travel distance from the start of actuation of the operating element up to the point where positive opening action of the opening contacts is completed.

DIN EN 60947-5-1 defines two types of positive opening action contacts with 4 connections and double break.

Type Za

- Positively opening contacts not galvanically isolated

Type Zb

- Positively opening contacts galvanically isolated

Galvanic isolation describes the isolation of electrically conducted parts by insulating material or by air gaps.

In switching devices with several contact elements, galvanically isolated contact elements make it possible to switch voltages with different potential (e.g. normally-closed contact in safety circuit, normally-open contact for indicator).

In accordance with applicable health and safety requirements, protective devices (guards) must be mounted on machines, devices and systems that perform hazardous movements. Safety switches in the form of electromechanical switching devices are predominantly used for this purpose as they offer the following advantages:

- High degree of safety
- Non-susceptibility to interference
- Safety status easily checked on site
- Rational solutions

Form-fit, mechanical drives or coupling elements in the form of levers, rods, gearwheels etc. are necessary to ensure optimum operation of these safety components.


Switching devices that are used for safety functions must be identified with the symbol ⊕ internationally standardised in accordance with DIN EN 60947-5-1. In defining the class of switching devices, this symbol denotes two important properties that must be met for personal protection applications:

- Mechanical positive opening action
- Disruptive breakdown voltage > 2.5 kV


Disruptive breakdown voltage

In accordance with DIN EN 60947-5-1, the open contacts must be able to maintain a minimum surge voltage of 2.5 kV without disruptive breakdown.


Standard actuator DIN EN 50047




Form A



Form B




Form C




Form E


Standard actuator DIN EN 50041




Form A



Form B



Form C



Form D

Content and significance of ISO 14119

ISO 14119 describes the requirements in selecting and installing safety switches and sensors (with and without interlock function).

ISO 14119 defines 4 different types of products

Type 1	Type 2	Type 3	Type 4
mechanical		contactless	
uncoded	coded	uncoded	coded
Position Switches (with )  I88 ENK ENM etc.	Interlocking devices  SK SKC SKI etc.	Magnetic switches (Hall and Reed)  MAK	Magnetic switches  MAK 42/52/53
Safety Hinge Switch  SHS3 SHS	Interlocking devices with interlock function  SLK SLM	Inductive Capacitive Optical  KIN/OM KLN	CSMS-A/R/RRS sensors RFID 

In addition to the above, BERNSTEIN has a complete range of complimentary products all in accordance with ISO 14119.

ISO 14119 defines possible methods used to prevent tampering

– Avoidance of any accessibility to elements of the locking system

- Switch installed in an inaccessible position
- Barriers or shielding of the switch
- Installation of the switch in a concealed area

– Avoidance of disassembly or position modification of locking system elements by means of permanent fixings (for ex. welding, gluing, non-removable screws, riveting);

– Avoidance of any actuation of the locking system by readily accessible objects, by using coded actuators

Compared to the preceding standard, the following coding schemes of the actuators regarding, amongst other things, manipulation protection will be defined:

- coded actuators with low-level coding (with SK, SLK, MAK)
- coded actuator with medium-level coding
- coded actuator with high-level coding (CSMS)

In the field of locking systems with low-level coding, the existing products such as SLK, SLM, SK, MAK are still to be used in combination with the MÜZ.

– Avoidance of circumvention for ex. through plausibility tests by the control unit

Note on series connection of locking systems

The standard expressly indicates the possible error concealment (error masking) when mechanical contacts are connected in series. A series connection can lead to reduction of the performance level according to ISO 13849-1.

The use of electronic safety sensors such as the CSMS guarantees the highest performance level also in case of a series connection.

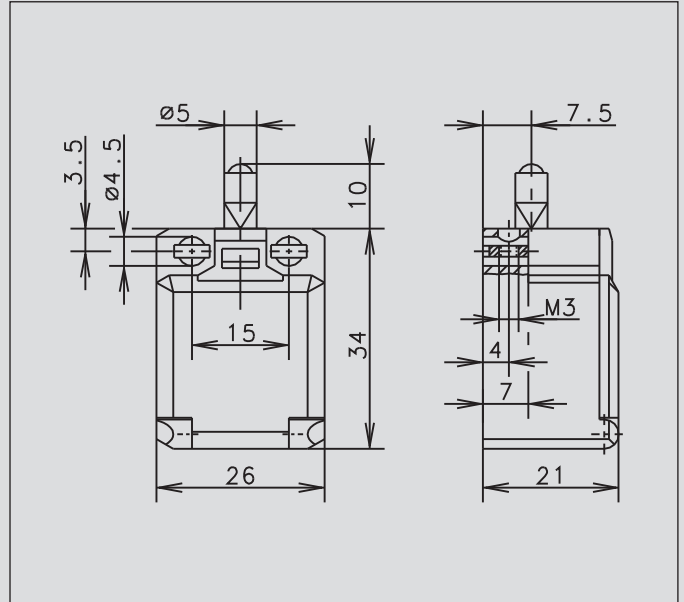
ISO 14119 provides support during the selection of the locking system and contains all relevant requirements related to the placement of locking systems.

For further information see among other things the DGUV information 203-079 "Selection and placement of locking systems".

Selection of an interlock function

According to ISO 14119, a locking system must be used in combination with an interlock function if the over-travel time for the entire system is longer than or the same as the period of time it takes for a person to reach the hazardous area.

C2



Recommended use

Ideal for safety applications and position monitoring in confined spaces.

Product advantages

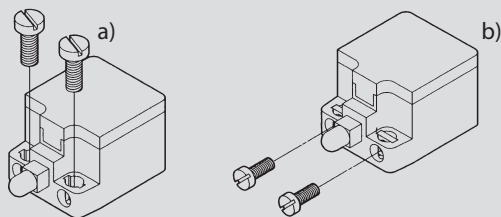
- Miniature switch for safety applications
- Two-channel safety monitoring possible
- With captive snap-on cover
- Small hysteresis in snap action system

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC, 2 NO
- All NC contacts with $\ominus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated changeover contact)

Mounting

- Also suitable for front mounting (depending on type)



- a) 2 round holes for M4 screws
- b) 2 Integrated nuts for front mounting for M3 screws (depending on type)


Installation advantages

- Snap-on cover can be released with screwdriver
- Cover opening range 180° (cover can also be detached from hinge)
- Cover protects switching element during installation
- Screw connections with self-lifting clamping plates
- Cover transparent for adjustment and visual inspection
- Easy-action cover lock (close and press)


Technical data

Electrical data		
Rated insulation voltage	U_i max.	240 V AC
Conventional thermal current	I_{the}	10 A
Rated operating voltage	U_e max.	240 V
Utilisation category	U_e/I_e	AC-15, U_e/I_e 240 V/3 A
Short-circuit protection		Fuse 6 A gL/gG
Protection class		II, Insulated
Mechanical data		
Enclosure material		Thermoplastic, glass fibre-reinforced (UL 94-V0)
Ambient temperature		-30 °C to +80 °C
Mechanical service life		3 x 10 ⁶ switching cycles
B10d		6 Mio.
Switching frequency		≤ 100/min
Type of connection		Screw connections
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry		Rectangle 8.5 x 3.5 mm
Protection class		IP20 conforming to EN 60529; DIN VDE 0470 T1
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1		
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

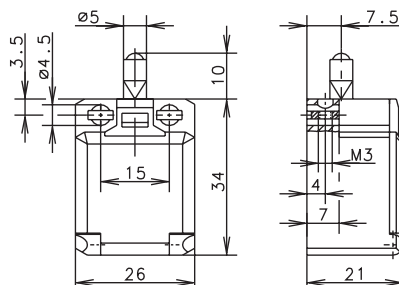W



ST

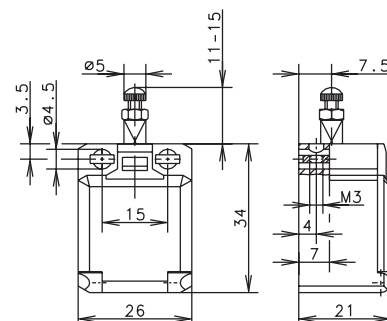

Switching operation





Slow-action

Snap-action




Slow-action

Snap-action




1 NC / 1 NO contact

6008101001
C2-U1Z6008351002
C2-SU1Z6008104025
C2-U1Z ST6008354026
C2-SU1Z ST

2 NC contacts

6008801003
C2-A2Z6008851004
C2-SA2Z6008804027
C2-A2Z ST

2 NO contacts

6008801005
C2-E26008851006
C2-SE26008804029
C2-E2 ST1 NC / 1 NO contact
Overlapping

Approvals



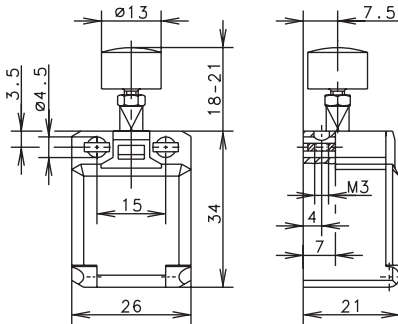
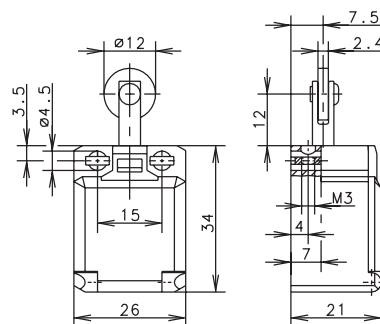
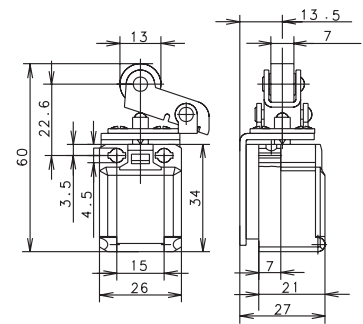
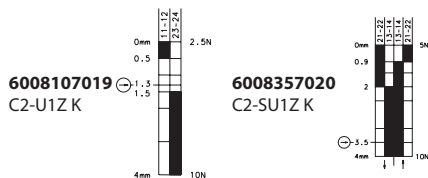
Replacement actuator: –

Replacement actuator: –


Special features / variants
(on request)

Special features / variants


- Actuator length adjustable with adjusting screw

K

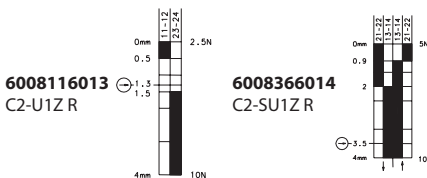R

O.M.

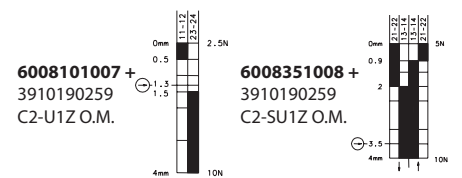Slow-action
Snap-action


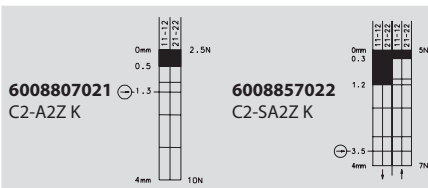
6008357020 C2-SU1Z K

Slow-action
Snap-action


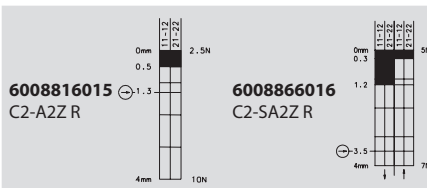
6008366014 C2-SU1Z R

Slow-action
Snap-action



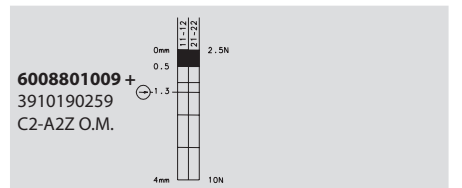
6008351008 + 3910190259 C2-SU1Z O.M.



6008857022 C2-SA2Z K



6008866016 C2-SA2Z R


Replacement actuator: –
Special features / variants

- Button actuator, for manual operation


Replacement actuator: –
Special features / variants

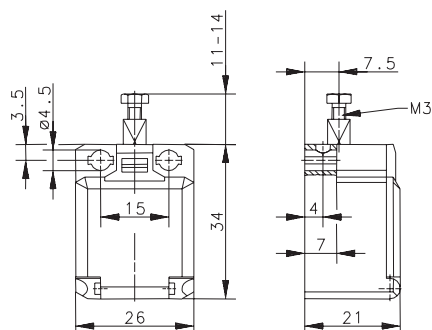
(on request)

- Also available with roller turned by 90°


Replacement actuator: 3910190259
Special features / variants

(on request)

BISTABLE O.M.




Switching operation

Slow-action

Snap-action

1 NC / 1 NO contact

6108351008
C2-SU1Z
BISTABLE O.M.



2 NC contacts

2 NO contacts

1 NC / 1 NO contact
Overlapping


Approvals

Replacement actuator: –

Special features / variants

- Bistable characteristics, actuator must be returned to initial position by external actuation (pulling)
- Actuator length adjustable with M3 adjusting screw

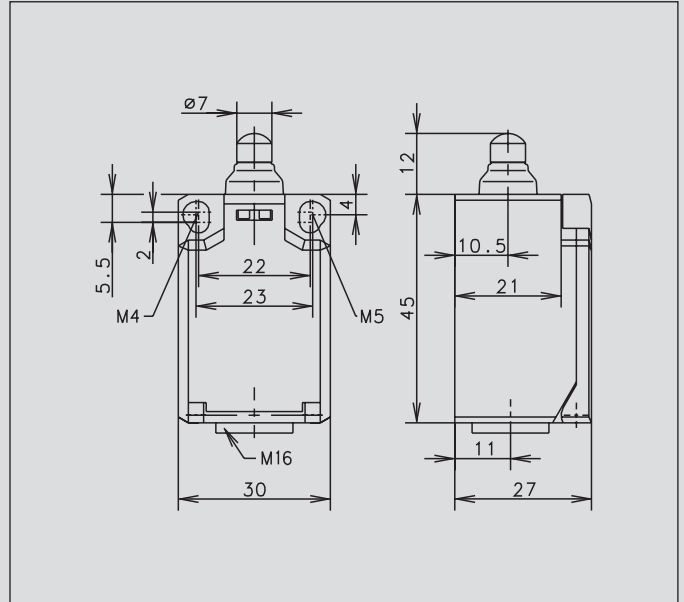Ti2



Recommended use

Ideal for safety applications and position monitoring in confined spaces with high protection class IP 65.

Product advantages

- Compact IP 65 switch for safety applications
- Optimised size while retaining tried-and-tested connection system
- Two-channel safety monitoring possible
- With captive snap-on cover
- 2 mm contact opening width of slow-action system conforming to EN 81-1 for lift construction
- Mall hysteresis in snap action system
- Actuator can be repositioned by 4 x 90°

Options


- Available with M12 connector
- AS interface variants available
- Preassembled with customer-specific cables and connectors on request

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC, 2 NO
- All NC contacts with $\ominus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated change-over contact)

Mounting

- Mounting dimensions conforming to DIN EN 50047
- 2 slots for adjustment with M4 screws (distance between centres 22 mm)



- Fixed positioning for safety applications with two M5 screws (distance between centres 23 mm)


Installation advantages

- Snap-on cover can be released with screwdriver
- Cover protects switching element during installation
- Screw connections with self-lifting clamping plates
- Cover transparent for adjustment and visual inspection
- Easy-action cover lock (close and press)


Technical data

Electrical data		
Rated insulation voltage	U _i max.	240 V AC
Conventional thermal current	I _{th}	10 A
Rated operating voltage	U _e max.	240 V
Utilisation category	U _e /I _e	AC-15, U _e /I _e 240 V/3 A; DC-13, U _e /I _e 240 V/0,27 A
Short-circuit protection		Fuse 6 A gL/gG
Protection class		II, Insulated
Mechanical data		
Enclosure material		Thermoplastic, glass fibre-reinforced (UL 94-V0)
Ambient temperature		-30 °C to +80 °C
Mechanical service life		3 x 10 ⁶ switching cycles
B10d		6 Mio.
Switching frequency		≤ 100/min.
Type of connection		Screw connections
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry		1 x M16 x 1,5
Protection class		IP65 conforming to EN 60529; DIN VDE 0470 T1
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

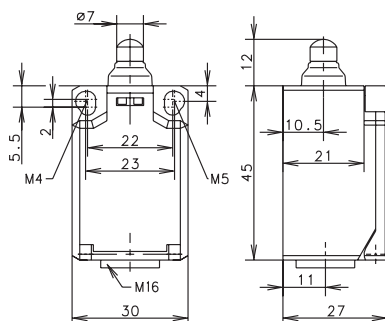W (Form B)



RIW (Form C)

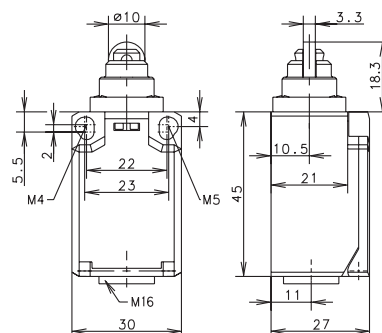

Switching operation

Slow-action


Snap-action

Slow-action


Snap-action

1 NC / 1 NO contact


6088103001
TI2-U1Z W




6088153002
TI2-SU1Z W



6088117007
TI2-U1Z RIW




6088167008
TI2-SU1Z RIW




2 NC contacts


6088803003
TI2-A2Z W




6088853004
TI2-SA2Z W



6088817009
TI2-A2Z RIW




6088867010
TI2-SA2Z RIW




2 NO contacts

6088803005
TI2-E2 W



6088867012
TI2-SE2 RIW

1 NC / 1 NO contact
Overlapping

Approvals



Replacement actuator: –

Replacement actuator: –


Special features / variants
(on request)

- Available with increased switching force


Special features / variants
(on request)

- Available with increased switching force
- Available with different actuating directions
- Cannot be turned by user


HW (Form E)



AH (Form A)




AD




Slow-action

Snap-action


6088121015
TI2-U1Z HW




6088171016
TI2-SU1Z HW




6088821017
TI2-A2Z HW



6088871018
TI2-SA2Z HW




6088871020
TI2-SE2 HW




Slow-action

Snap-action


6088135021
TI2-U1Z AH




6088185022
TI2-SU1Z AH



6088835023
TI2-A2Z AH




6088885024
TI2-SA2Z AH




Slow-action

Snap-action


6088137027
TI2-U1 AD




6088187028
TI2-SU1 AD




6088837029
TI2-A2 AD



6088887030
TI2-SA2 AD



6088887032
TI2-SE2 AD



Replacement actuator: 3918190681



Replacement actuator: 3918351166



Replacement actuator: 3918370986

Special features / variants

(on request)

- Available with different actuating directions
- With steel roller
- Various roller diameters

Special features / variants

(on request)

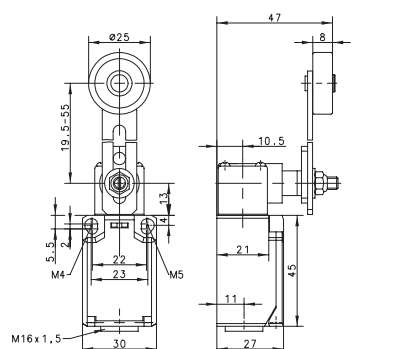
- Available with different actuating directions
- With steel roller
- Various roller diameters
- Cranked or straight lever
- Various lever lengths
- With roller over switch

Special features / variants

(on request)

- Available with different actuating directions
- With various actuator lengths
- Available with increased switching force

AV





Switching operation


Slow-action **Snap-action**

Snap-action


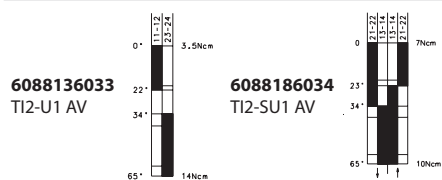
1 NC / 1 NO contact



2 NC contacts



2 NO contacts

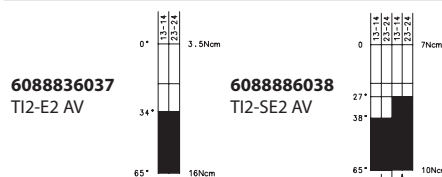

1 NC / 1 NO contact
Overlapping

Approvals

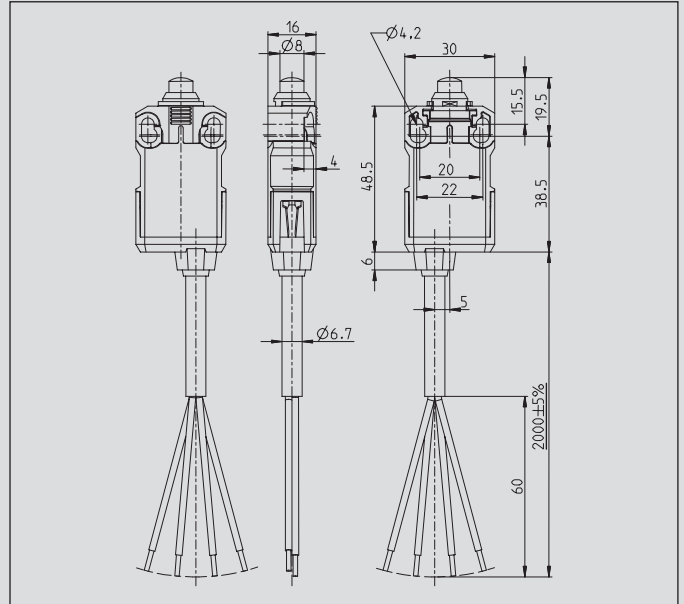
Replacement actuator: 3918360984

Special features / variants

(on request)

- Available with different actuating directions
- Various roller diameters
- Various lever lengths
- With roller over switch

IF



Recommended use

Most limit switches soon come up against their limits in applications involving confined spaces and wherever high protection classes are required, not with the IF switch from BERNSTEIN. With its slim design and full IP 67 protection they are simply ideal for position monitoring and end position shutdown in safety applications.

Product advantages

- Slim line design
- With 2 m fixed cable or AMP4 connector
- High quality plastic enclosure
- Metal actuator and mounting clip
- Small hysteresis in snap action system
- Actuator can be repositioned by 4 x 90°
- Compact IP 67 switch for safety applications
- Two-channel safety monitoring possible

Options

- Various cable lengths available on request
- Can be preassembled with customised connectors on request
- Other cable lengths available on request

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC, 2 NO
- All NC contacts with $\ominus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated changeover contact)

Mounting

- Two M4 screws for adjustment with slots
- Two M5 screws for safety applications; front mounting depending on type

Installation advantages


Flexibility is key in practical applications: And it is precisely here that IF switches from BERNSTEIN are a real asset. They have a modular design that makes them extremely flexible in installation and use. Minimum stockkeeping: The approach direction can be quickly and easily changed by installation technician.




Technical data

Electrical data		
Rated insulation voltage	U _i max.	240 V AC
Conventional thermal current	I _{the}	10 A
Rated operating voltage	U _e max.	240 V
Utilisation category	AC-15, U _e /I _e 240 V/3 A	
Short-circuit protection	Fuse 6 A gL/gG	
Protection class	II, Insulated	
Mechanical data		
Enclosure material	PA6 (glass fibre-reinforced)	
Ambient temperature	-25 °C to +70 °C (Connection cable installed)	
Mechanical service life	3 x 10 ⁶ switching cycles	
B10d	6 Mio.	
Switching frequency	≤ 30/min.	
Type of connection	Cable 4 x 0.75 mm ²	
Protection class	IP67 conforming to EN 60529; DIN VDE 0470 T1	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1		
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

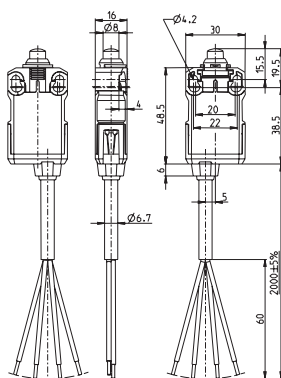IW



RIW

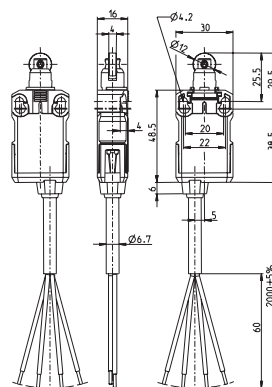

Switching operation

Slow-action


Snap-action

Slow-action


Snap-action

1 NC / 1 NO contact


6089102001
IF-U1Z IW




6089152006
IF-SU1Z IW



6089117002
IF-U1Z RIW



6089167007
IF-SU1Z RIW




2 NC contacts

6089802011
IF-A2Z IW



6089817012
IF-A2Z RIW



2 NO contacts

1 NC / 1 NO contact
Overlapping

Approvals



Replacement actuator: –

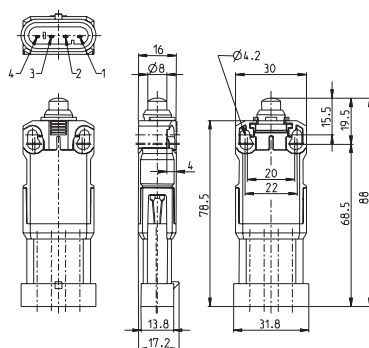
Replacement actuator: –

Special features / variants
(on request)


Special features / variants

- Actuator can be turned in steps of 90°

IW AMP4



RIW AMP4

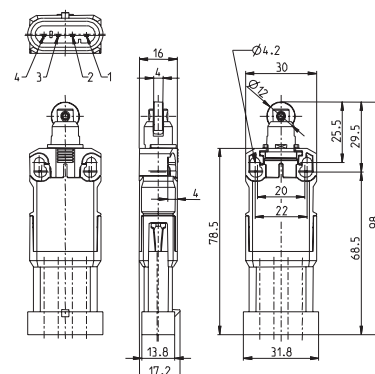

Switching operation

Slow-action


Snap-action

Slow-action


Snap-action

1 NC / 1 NO contact


6089102016
IF-U1Z IW
AMP4




6089152021
IF-SU1Z IW
AMP4



6089117017
IF-U1Z RIW
AMP4




6089167022
IF-SU1Z RIW
AMP4




2 NC contacts

6089802026
IF-A2Z IW
AMP4



6089817027
IF-A2Z RIW
AMP4



2 NO contacts

1 NC / 1 NO contact
Overlapping

Approvals



Replacement actuator: –

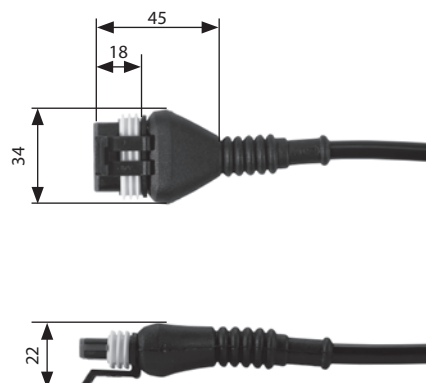
Special features / variants
(on request)

Replacement actuator: –

Special features / variants

- Actuator can be turned in steps of 90

AMP Connection cable



Switching operation

1 NC / 1 NO contact

Cable length 3.5 m:
3251204309
 AN-KAB.IF 3.5M AMP4

Cable length 5 m:
3251204281
 AN-KAB.IF 5M AMP4

2 NC contacts

Cable
 UL-CSA-S03VV2-F4x0.75 black n. UL2517, CSA
 C22.2/210.2 and n. VDE 0281 part 12 n. HAR 21.12 S1

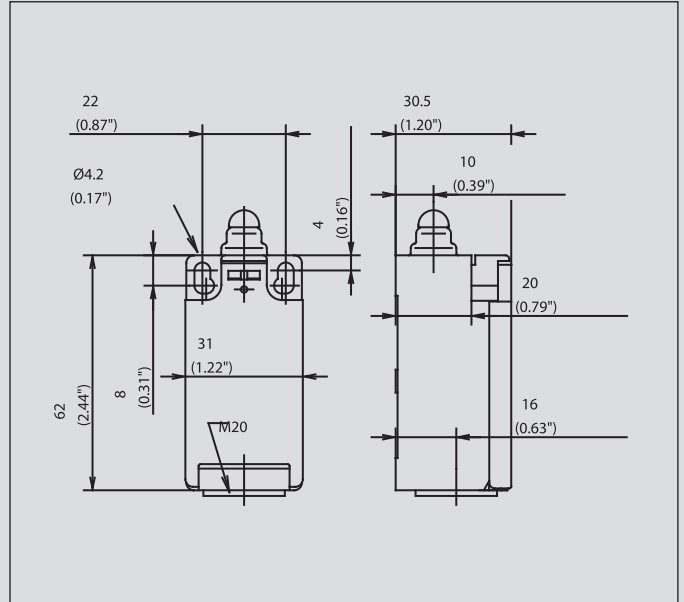
2 NO contacts

Pin assignment
 1-GY, 2-BU, 3-BN, 4-BK

1 NC / 1 NO contact
 Overlapping

Approvals

I88



Recommended use

Thanks to its standard dimensions as well as its wide range of contacts and actuators, this switch can be used on safety facilities and for position monitoring in virtually any industrial application.

Product advantages

- Standard switch conforming to DIN EN 50047
- Standard actuator conforming to DIN EN 50047 (see page 16)
- Protection class IP 65 to VDE 0470 T1
- Enclosure and cover PA 6, self-extinguishing (UL-94-V0)
- Actuator can be repositioned by 4 x 90°
- Cable entry M20 x 1.5
- Connection designation conforming to DIN EN 50013

Options

- Available with M12 connector
- AS interface variants available
- Cable entry M16 x 1.5

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC, 2 NO, overlapping contacts
- All NC contacts with $\ominus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated changeover contact)
- Latching function on request

Mounting

- Two M4 screws (distance between centres 22 mm), adjustment with slots
- Two M5 screws for safety applications without additional fixing element (Fig. 1)
- Additionally secured by guide plate for lateral approach forces (Fig. 2 and page 69)
- Front mounting (depending on type, Fig. 3)

Installation advantages

- Snap-on cover can be released with screwdriver
- Cover opening range 135° (cover can also be detached from hinge)
- Cover protects switching element during installation
- Screw connections with self-lifting clamping plates
- Easy-action cover lock (close and press)
- Cover additionally secured with screw




Fig. 1




Fig. 2





Fig. 3

Technical data


Electrical data	
Rated insulation voltage	U _i max. 250 V AC
Conventional thermal current (up to) ^①	I _{the} 10 A
Rated operating voltage	U _e max. 240 V
Utilisation category (up to) ^①	AC-15, U _e /I _e 240 V/3 A
Short-circuit protection (up to) ^①	Fuse 10 A gL/gG
Protection class	II, Insulated
Mechanical data	
Enclosure material	Thermoplastic, glass fibre-reinforced (UL 94-V0)
Ambient temperature	−30 °C to +80 °C
Mechanical service life (up to) ^①	10 x 10 ⁶ switching cycles
B10d (up to) ^①	20 Mio.
Switching frequency	≤ 100/min.
Type of connection	Screw connections
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry	1 x M20 x 1,5
Standards	
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1	
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1	

^① Depending on switching system. See Table on Pages 70 – 73.

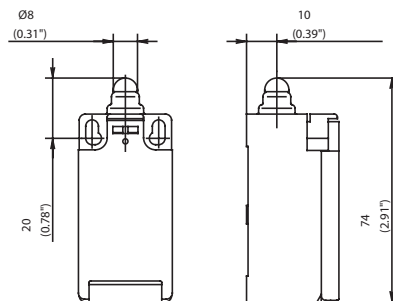W (Form B)



RIWK (Form C)

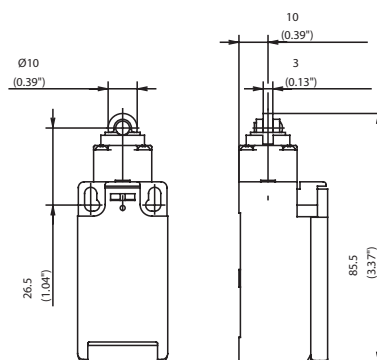

Switching operation

Slow-action


Snap-action

Slow-action


Snap-action

1 NC / 1 NO contact


6086103008
I88-U1Z W




6086153012
I88-SU1Z W



6086117017
I88-U1Z RIWK



6086167018
I88-SU1Z
RIWK



2 NC contacts

6086803013
I88-A2Z W




6086817087
I88-A2Z RIWK




2 NO contacts


6086803014
I88-E2 W



6086817071
I88-E2 RIWK

1 NC / 1 NO contact
Overlapping

6086303011
I88-UV1Z W



Approvals



Replacement actuator: –

Replacement actuator: 3918161672

Special features / variants

(on request)

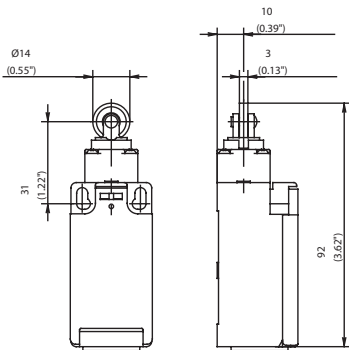
- Available with black enclosure
- With latching function and following contacts:
2 NC / 1 NO contact
1 NC / 2 NO contact
- Both with and without overlap

Special features / variants


(on request)

- Available with black enclosure
- With latching function
- With steel roller and following contacts:
2 NC / 1 NO contact
1 NC / 2 NO contact
- Both with overlap


RIWL



KNW RO22

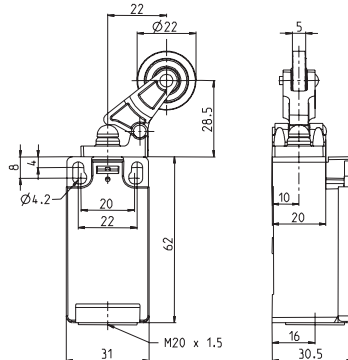


HW RO11 (Form E)

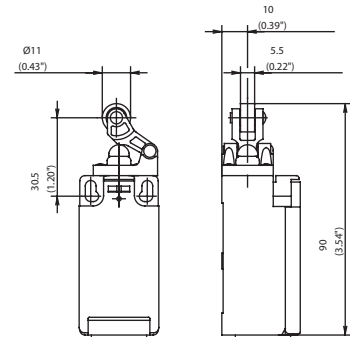


Slow-action

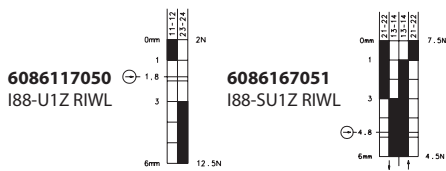Snap-action




6086167051
I88-SU1Z RIWL




Slow-action

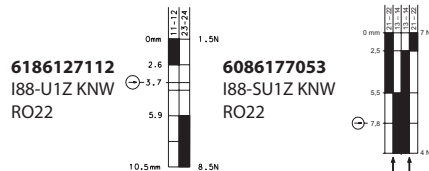Snap-action




6086177053
I88-SU1Z KNW RO22










Slow-action

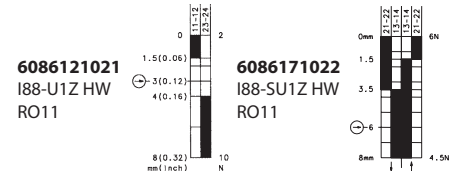Snap-action



6086171022
I88-SU1Z HW RO11

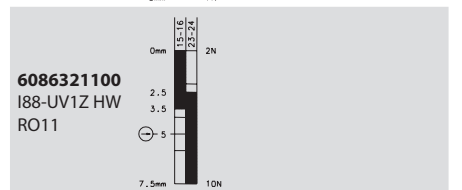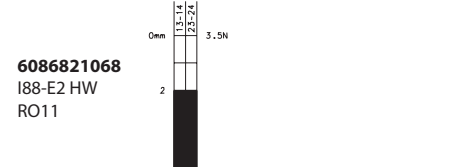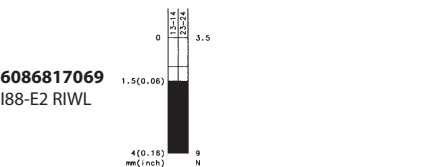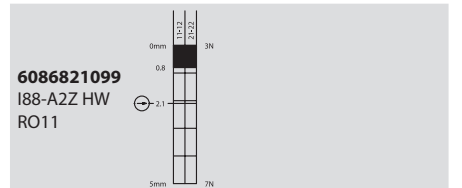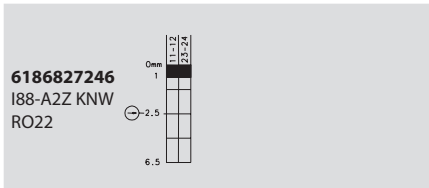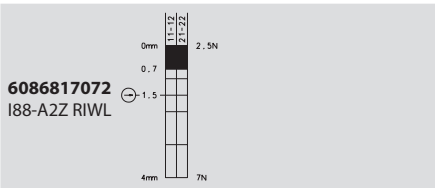

Replacement actuator: 3918161673

Replacement actuator: 3918252223

Replacement actuator: 3918191547

Special features / variants

(on request)

- Available with black enclosure
- With latching function
- Available with different actuating directions
- With steel roller

Special features / variants


(on request)

Special features / variants


(on request)

- Available with black enclosure
- With steel roller
- Various roller diameters

AH (Form A)



AV




Switching operation

1 NC / 1 NO contact

Slow-action

Snap-action

6086135033
I88-U1Z AH




6086185034
I88-SU1Z AH




Slow-action

Snap-action

6086136037
I88-U1 AV




6086186038
I88-SU1 AV




2 NC contacts

6086835059
I88-A2Z AH




6086836131
I88-A2 AV



2 NO contacts

1 NC / 1 NO contact
Overlapping

6186335628
I88-UV1Z AH



Approvals



Replacement actuator: 3918351166

Replacement actuator: 3918360984


Special features / variants (on request)

- Available with black enclosure
- Available with different actuating directions
- With steel roller
- Various roller diameters
- Cranked or straight lever
- Various lever lengths


Special features / variants (on request)

- Available with black enclosure
- Various actuating directions
- Various roller diameters
- Cranked or straight lever
- Various lever lengths
- With roller over switch


DGHW RO22



DGKW RO22





FF





Slow-action

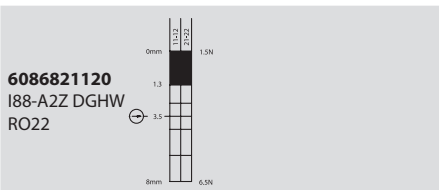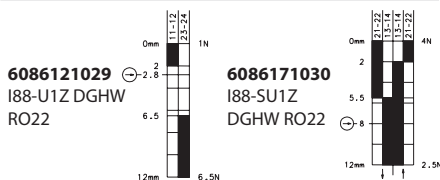Snap-action








Slow-action

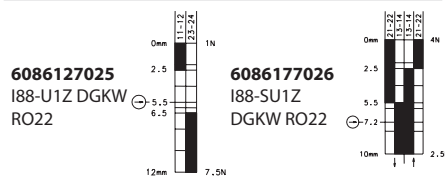Snap-action



Slow-action

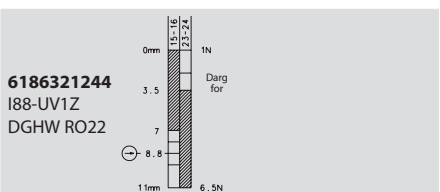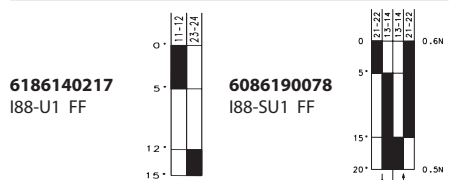Snap-action



Replacement actuator: 3918211529

Replacement actuator: 3918271528

Replacement actuator: 3918401031

Special features / variants

(on request)

- Available with black enclosure
- Available with different actuating directions
- Various roller diameters

Special features / variants

(on request)


- With latching function
- Various roller diameters and with following contacts:
2 NC / 1 NO contact
1 NC / 2 NO contact
Both with overlap

Special features / variants


(on request)

- Available with black enclosure
- Various spring lengths
- Different spring versions or spring rod

KS



W RAST

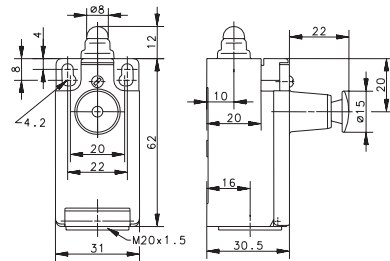


Switching operation

1 NC / 1 NO contact

Slow-action


Snap-action

6116819140
I88-U1Z KS



Slow-action


6186103005
I88-U1Z W
RAST



2 NC contacts

2 NC contacts

6186803155
I88-A2Z W
RAST



2 NO contacts

2 NO contacts

1 NC / 1 NO contact
Overlapping

1 NC / 1 NO contact
Overlapping

Approvals



Replacement actuator: –

Replacement actuator: –

Special features / variants
(on request)

Special features / variants
(on request)

SGS

The SGS is a bistable safety switch with remote release facility. Once switched, the SGS remains in this position until it is manually reset at the plunger or via an external button. A built-in solenoid actuator controls the release action. In its rugged plastic housing, it represents an economically priced alternative to the BERNSTEIN GC Series with remote release.

The SGS can be used wherever an intentional (manual or electrical) reset function is required:

- In lift construction
- In door and gate systems
- In wind power stations
- Wherever safety is of prime importance


By correspondingly checking the NC contacts with positive opening action, an evaluator circuit is able to disconnect the power supply to a drive controller and shut down the machine.

SGS applications include

- Lift pre-switching (speed limiter)
- Monitoring of emergency release function
- Machine construction applications where specific reset after operation is required
- Use in areas difficult to access
- Remote monitoring and reset over large distances

Features:

- Plunger indicates switch status
- Plunger groove for manual reset
- 2 versions: 230 V AC and 24 V DC
- Reset via built-in solenoid actuator
- 3 cable outlets M20 x 1.5
- Switching functions: 2 NC contacts
- TÜV EN 81 approval
- Other actuators from the standard range on request



Product selection

Supply voltage reset 24 Volt				
Switching operation	Actuating force 3 N		Actuating force 6 N	
1NC / 1NO	–	–	–	–
2NC	6010853002	SGS-SA2Z W F3 24 V	6010853001	SGS-SA2Z W F6 24 V

Supply voltage reset 230 Volt				
Switching operation	Actuating force 3 N		Actuating force 6 N	
1NC / 1NO	–	–	6010153027	SGS-SU1Z W F6 230 V
2NC	6010853004	SGS-SA2Z W F3 230 V	6010853003	SGS-SA2Z W F6 230 V




Technical data

Electrical data		
Protection class		II, Insulated
Switching elements		
Rated insulation voltage	U _i	250 V AC
Thermal current	I _{the}	10 A
Utilisation category	AC-15, U _e /I _e 240 V / 3 A DC-13, U _e /I _e 250 V / 0.27 A	
Minimum switching voltage	24 V	
Minimum switching current	5 mA	
Positive opening	⊙	conforming IEC/EN 60947-5-1, Addendum K
Short-circuit protection	Fuse 4 A gL/gG	
Electromagnet		Without free-wheeling diode
Thermal class		B (130 °C)
Rated operating voltage	U _e	24 V DC / 230 V AC (depending on type)
Rated operating current	I _e	2.3 A / 0.23 A AC
Duty factor	ED	3 %
Minimum ON time	T _i	0.2 s
Maximum ON time	T _e	0.5 s
Minimum OFF time	T _p	17 s
Mechanical data		
Enclosure		Glass fibre-reinforced thermoplastic, self-extinguishing
Cover		Glass fibre-reinforced thermoplastic, self-extinguishing
Actuation		Plunger (thermoplastic)
Approach speed	V _{max}	0.5 m/s
Ambient temperature		−25 °C bis +50 °C
Contact type		2 NC contacts (Zb) / NC contacts, 1NO contacts (Zb)
Switching principle		Snap action system, bistable
Mechanical service life		5 x 10 ⁴ switching cycles
B10d		0,1 Mio.
Bolt		2 x M4 / 2 x M5 for safety applications
Type of connection Switching element		Screw connections
Conductor cross sections		Single-wire 0.5 ... 1.5 mm ²
Type of connection Electromagnet		2 x butt connector similar to DIN 46341 (crushing zone 0,5 – 1,5 mm ²)
Cable entry		3x M20x1,5
Installation position		Any
Contact opening		4 x >2 mm
Protection class		IP65 conforming to IEC/EN 60529
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1 DIN EN 81-1		

Insulation-Enclosed Limit Switches

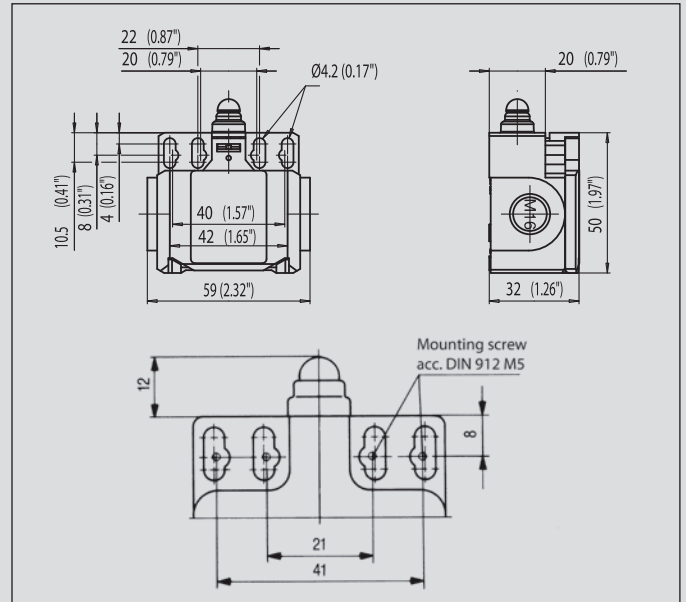Bi2



Recommended use

Thanks to its two cable entries, this switch is ideal for use in series-connected monitoring facilities.

Product advantages

- Protection class IP 65 to VDE 0470 T1
- Enclosure and cover PA 6, self-extinguishing (UL-94 V0)
- Actuator can be repositioned by 4 x 90°
- Cable entry 2x M16 x 1.5
- Connection designation conforming to DIN EN 50013

Options

- Available with M12 connector
- AS interface variants available
- Preassembled with customer-specific cables and connectors on request

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC
- All NC contacts with $\oplus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated changeover contact)

Mounting

- Two M4 adjustment slots (distance between centres 22 mm)
- Two M4 adjustment slots (distance between centres 42 mm)
- Two M5 holes (distance between centre 21 mm) for safety applications
- Two M5 holes (distance between centre 41 mm) for safety applications without additional securing element
- Front mounting

Installation advantages

- Cover opening range 135° (cover can also be detached from hinge)
- Screw connections with self-lifting clamping plates
- Easy-action cover lock (close and press)
- Cover additionally secured with screw
- 2 cable entries for through-wiring


Technical data

Electrical data		
Rated insulation voltage	U _i max.	400 V AC
Conventional thermal current ^①	I _{th}	10 A
Rated operating voltage	U _e max.	240 V AC
Utilisation category		AC15, U _e /I _e 240 V/3 A
Short-circuit protection (up to) ^①		Fuse 10 A gL/gG
Protection class		II, Insulated
Mechanical data		
Enclosure material		Thermoplastic, glass fibre-reinforced
Ambient temperature		-30 °C to +80 °C
Mechanical service life (up to) ^①		10 x 10 ⁶ switching cycles
B10d (up to) ^①		20 Mio.
Switching frequency		≤ 100/min.
Type of connection		Screw connections
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry		2 x M16 x 1,5
Protection class		IP 65 conforming to EN 60529; DIN VDE 0470 T1
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

① Depending on switching system. See Table on Pages 70 – 73.

W

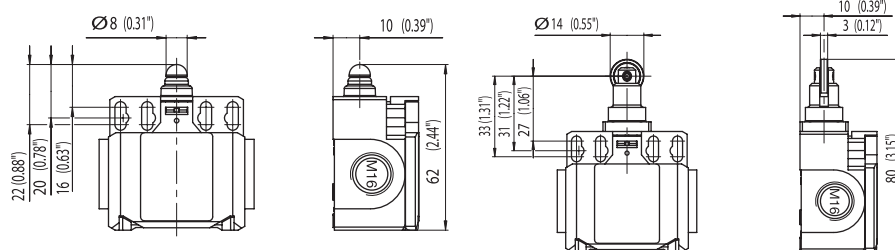RIW



Switching operation




Slow-action

Snap-action


Slow-action

Snap-action


1 NC / 1 NO contact

6085103100
 BI2-U1Z W

6085153107
 BI2-SU1Z W

6085117101
 BI2-U1Z RIW

6085167108
 BI2-SU1Z RIW


2 NC contacts

6085803116
 BI2-A2Z W


2 NO contacts

1 NC / 1 NO contact
Overlapping
6085303115
 BI2-UV1Z W


Approvals



Replacement actuator: –



Replacement actuator: –

Special features / variants
 (on request)



Special features / variants
 (on request)

- With steel roller

AH



AV



Switching operation

1 NC / 1 NO contact

2 NC contacts


2 NO contacts

1 NC / 1 NO contact
Overlapping


Slow-action

Snap-action

6085135104
BI2-U1Z AH




6085185111
BI2-SU1Z AH



Slow-action

Snap-action

6085186112
BI2-SU1 AV



Approvals



Replacement actuator: 3918351166

Replacement actuator: 3918360984

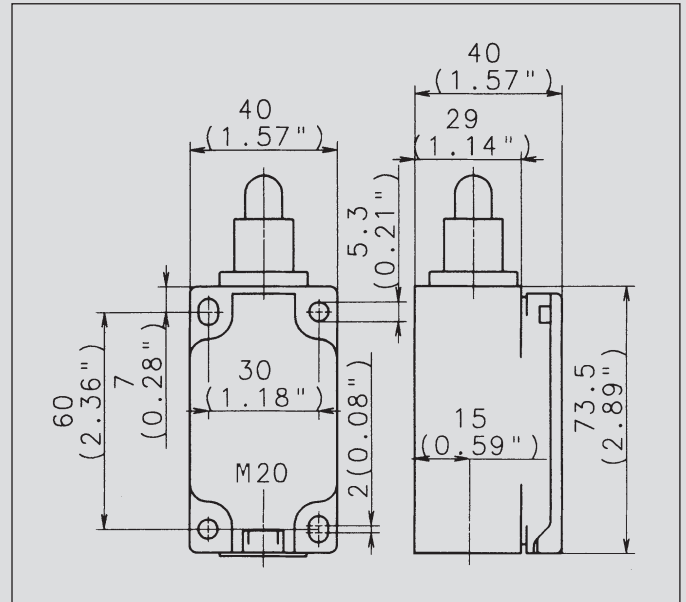
Special features / variants
(on request)

- Available with different actuating directions
- With steel roller
- Various roller diameters
- Cranked or straight lever
- Various lever lengths

Special features / variants
(on request)

Insulation-Enclosed Limit Switches

ENK



Recommended use

Thanks to its design and its metal actuator, the ENK limit switch is particularly suitable for applications requiring a sturdy safety switch made of plastic.

Product advantages

- Standard switch conforming to DIN EN 50041
- Standard actuator conforming to DIN EN 50041 (see page 16)
- Protection class IP 65 to VDE 0470 T1
- Enclosure and cover PA 6, (UL-94-V0)
- Actuator can be repositioned by 4 x 90°
- Cable entry M20 x 1.5
- Connection designation conforming to DIN EN 50013
- Metal actuators for high loads

Options

- Available with M12 connector
- AS interface variants available
- Preassembled with customer-specific cables and connectors on request

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC, 3 NC, overlapping contacts
- Latching function on request
- All NC contacts with $\ominus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated changeover contact)

Mounting

- 2 adjustment slots for M5 screws
- 2 holes for M5 mounting screws in safety applications

Installation advantages


- Snap-on cover can be released with screwdriver
- Cover opening range 150° (cover can also be detached from hinge)
- Cover protects switching element during installation
- Screw connections with self-lifting clamping plates
- Easy-action cover lock (close and press)

Technical data


Electrical data		
Rated insulation voltage	U _i max.	400 V AC
Conventional thermal current (up to) ^①	I _{the}	10 A
Rated operating voltage	U _e max.	240 V
Utilisation category	AC-15, U _e /I _e 240 V/3 A	
Short-circuit protection (up to) ^①	Fuse 10 A gL/gG	
Protection class	II, Insulated	
Mechanical data		
Enclosure material	Thermoplastic, glass fibre-reinforced	
Ambient temperature	-30 °C to +80 °C	
Mechanical service life (up to) ^①	10 x 10 ⁶ switching cycles	
B10d (up to) ^①	20 Mio.	
Switching frequency	≤ 100/min.	
Type of connection	Screw connections	
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	
Cable entry	1 x M20 x 1.5 ≈ 0.15 kg	
Protection class	IP 65 onforming to EN 60529; DIN VDE 0470 T1	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

^① Depending on switching system. See Table on Pages 70 – 73.

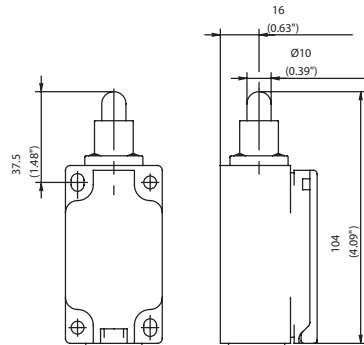IW (Form B)



RIW (Form C)

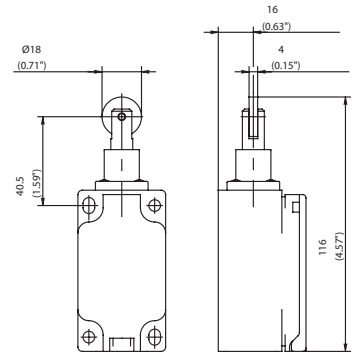


Switching operation

1 NC / 1 NO contact


Slow-action

Snap-action

6081102001
ENK-U1Z IW




6081152007
ENK-SU1Z IW




Slow-action

Snap-action

6081117002
ENK-U1Z RIW



6081167008
ENK-SU1Z RIW




2 NC contacts


2 NO contacts

1 NC / 1 NO contact
Overlapping

6081817281
ENK-A2Z RIW



6081317307
ENK-UV1Z RIW



Approvals



Replacement actuator: 3918020660

Replacement actuator: 3918170661


Special features / variants (on request)

- Available with black enclosure and following contacts:
3 NC contacts


Special features / variants (on request)

- Available for high temperature range and following contacts:
3 NC contacts

AHS-V (Form A)



AV




Switching operation

1 NC / 1 NO contact


Slow-action

Snap-action

6081135003
ENK-U1Z AHS-V




6081185009
ENK-SU1Z
AHS-V




Slow-action

Snap-action

6081136012
ENK-U1 AV



6081186018
ENK-SU1 AV



2 NC contacts


6081835323
ENK-A2Z AHS-V



2 NO contacts

1 NC / 1 NO contact Overlapping

6081335006
ENK-UV1Z
AHS-V



Approvals



Replacement actuator: 3918350737

Replacement actuator: 3918360738

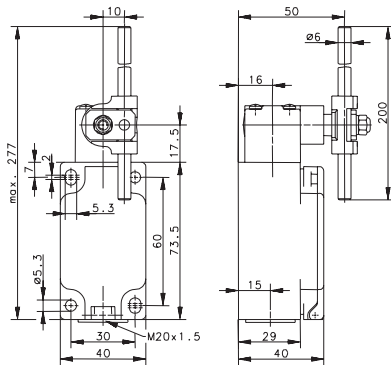
Special features / variants (on request)

- Available with black enclosure
- With 50 mm diameter rubber roller and following contacts:
3 NC contacts


Special features / variants (on request)

- Available with different lever lengths and roller diameters
- With 50 mm diameter rubber roller
- With roller over switch


AD (Form D)



HW RO20




FF

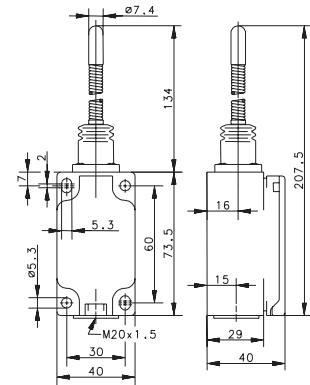


Slow-action

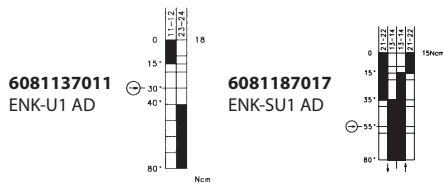Snap-action







Slow-action

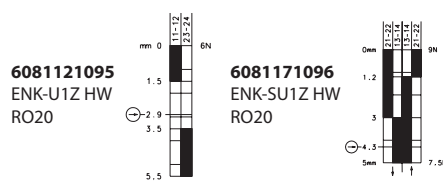Snap-action



Slow-action

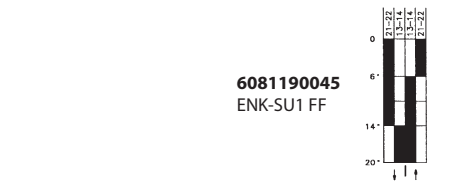Snap-action



Replacement actuator: 3918370739

Replacement actuator: 3918200906

Replacement actuator: 3918400662

Special features / variants

(on request)

- Available with various actuator directions and actuator lengths

Special features / variants

(on request)

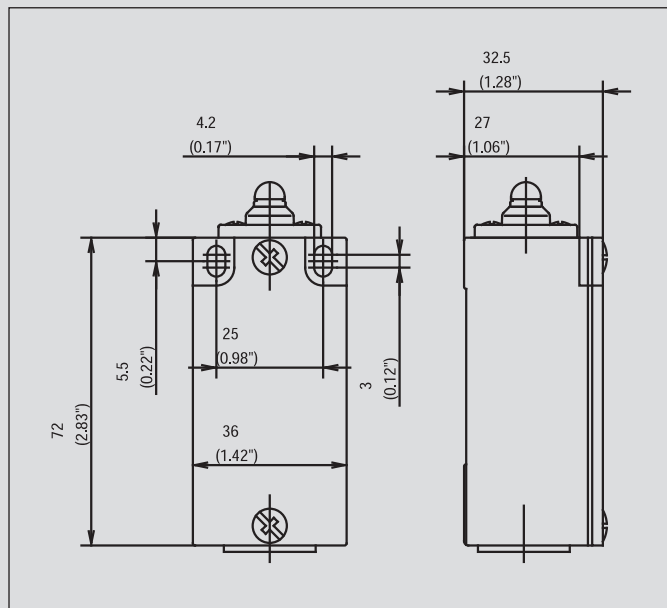
- Available with black enclosure and various roller diameters

Special features / variants

(on request)

Metal-Enclosed Limit Switches

GC



Recommended use

Thanks to its compact design, this metal-enclosed switch is ideally suited for virtually all safety and position monitoring applications.

Product advantages

- Protection class IP 65 to VDE 0470 T1
- Enclosure: Aluminium pressure die-casting
- Cover: Sheet aluminium
- Actuator can be repositioned by 4 x 90°
- Cable entry M20 x 1.5
- Connection designation conforming to DIN EN 50013
- Metal actuators for high loads
- Graduated adjustment of AH lever
- Selectable direction-dependent contact-making of AH actuator (basic setting: contact-making both sides)

Options

- AS interface versions on request
- Preassembled with customer-specific cables and connectors on request

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC / 2 NO, 2 NC, overlapping contacts
- All NC contacts with $\ominus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated changeover contact)
- Latching function on request

Mounting

- 2 adjustment slots for M4 screws (for safety applications with blind hole for $\varnothing$ 4.0 mm fitted pin in enclosure base or enclosure with holes for M5)

Installation advantages


- Screw connections with self-lifting clamping plates
- Captive cover screws
- Easy-to-change switching system thanks to snap-in retainer
- Finely adjustable switching point with adjusting screw

Technical data


Electrical data	
Rated insulation voltage (up to) ^①	U _i max. 400 V AC
Conventional thermal current (up to) ^①	I _{the} 10 A
Rated operating voltage	U _e max. 240 V
Utilization category (up to) ^①	AC-15, U _e /I _e 240 V/3 A
Short-circuit protection (up to) ^①	Fuse 10 A gL/gG
Protection class	I
Mechanical data	
Enclosure material	Aluminium pressure die-casting
Ambient temperature	-30 °C to + 80 °C
Mechanical service life (up to) ^①	10 x 10 ⁶ switching cycles
B10d (up to) ^①	20 Mill.
Switching frequency	≤ 100/min.
Type of connection	Screw connections
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry	1 x M20 x 1.5
Protection class	IP 65 conforming to IEC/EN 60529
Standards	
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1	

^① Depending on switching system. See Table on Pages 70 – 73.

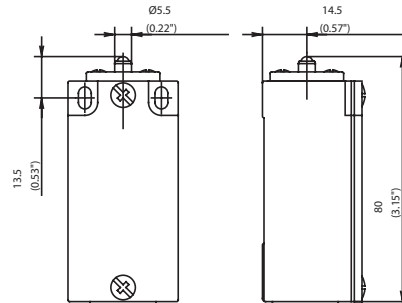IW



STIW

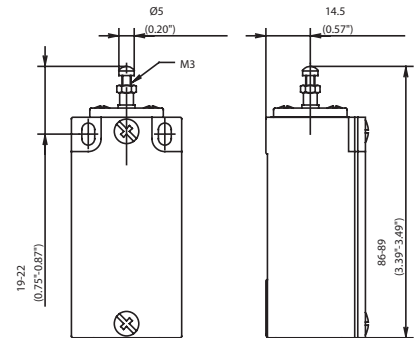


Switching operation

1 NC / 1 NO contact


Slow-action

Snap-action

6021102001
GC-U1Z IW




6021352620
GC-SU1Z IW




Slow-action

Snap-action

6021105015
GC-U1Z STIW




6021155017
GC-SU1Z STIW



2 NC contacts


6021802189
GC-A2Z IW



2 NO contacts

1 NC / 1 NO contact
Overlapping

6021305016
GC-UV1Z STIW



Approvals




Replacement actuator: 3912030546

Replacement actuator: 3912050523


Special features / variants
(on request)

Special features / variants
● Actuator length adjustable
with adjusting screw

RIW



AH

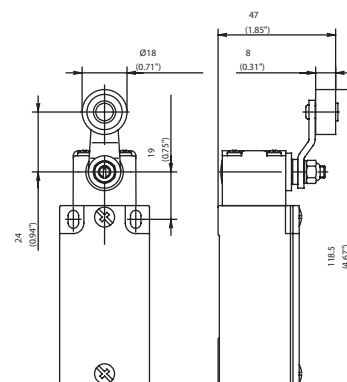


Switching operation

1 NC / 1 NO contact


Slow-action

Snap-action

6021117029
GC-U1Z RIW



6021367626
GC-SU1Z RIW




Slow-action

Snap-action

6021135102
GC-U1Z AH




6021385634
GC-SU1Z AH




2 NC contacts

6021817172
GC-A2Z RIW




6121835833
GC-A2Z AH




See separate
datasheet

2 NO contacts


6021835160
GC-E2 AH

1 NC / 1 NO contact
Overlapping

6021317030
GC-UV1Z RIW



6021335133
GC-UV1Z AH



Approvals



Replacement actuator: 3912170518

Replacement actuator: 3912350722

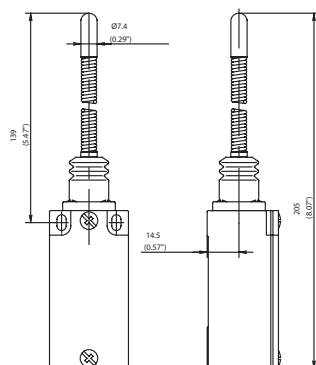
Special features / variants
(on request)

- Available for high temperature range and following contacts:
 - 2 NC / 1 NO contact
 - 2 NC / 2 NO contact (larger enclosure)


Special features / variants
(on request)

- Available with various roller diameters, cranked or straight lever and with various lever lengths
- With roller over switch and with following contacts:
 - 2 NC / 2 NO contact (larger enclosure)

FF



AF

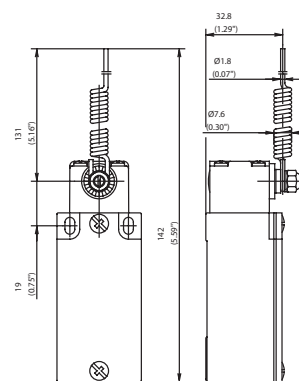

Switching operation

1 NC / 1 NO contact


2 NC contacts

2 NO contacts

1 NC / 1 NO contact
Overlapping



Slow-action

Snap-action

6021140476
GC-U1 FF6021190100
GC-SU1 FF

Slow-action

Snap-action

6021139106
GC-U1 AF6021189128
GC-SU1 AF

Approvals



Replacement actuator: 3912400510

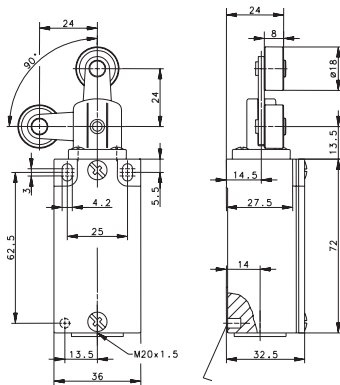

Replacement actuator: 3912390725

Special features / variants
(on request)

- Different spring lengths
- Different spring versions or spring rod


Special features / variants
(on request)

- Available with various actuator lengths and actuator directions

DR

Slow-action
Snap-action
6021191099
GC-SU1Z DR

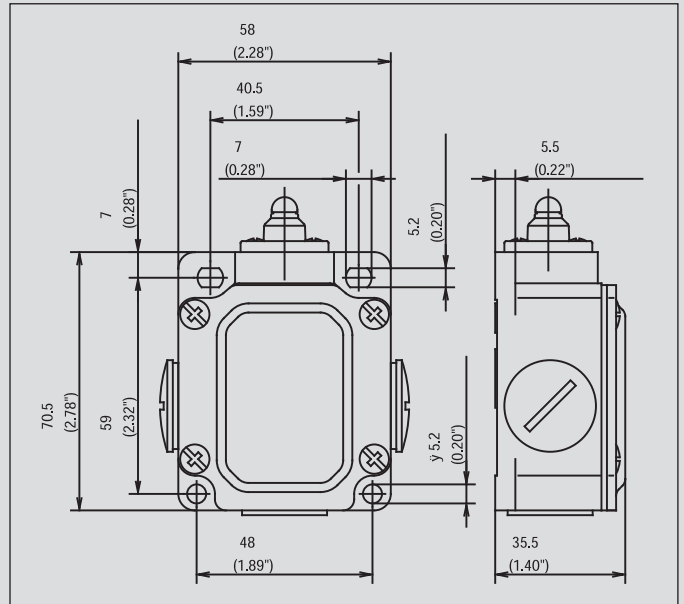Replacement actuator: 3912410593
Special features / variants
 (on request)

Metal-Enclosed Limit Switches

SN2



Recommended use

With its three cable entries and spacious connection area, the SN2 limit switch is the optimum solution for through-wiring or even branching off electrical circuits.

Product advantages

- Protection class IP 65 to VDE 0470 T1
- Enclosure: Aluminium pressure die-casting
- Cover: Sheet aluminium
- Actuator can be repositioned by 4 x 90°
- Cable entry 3x M20 x 1.5
- Connection designation conforming to DIN EN 50013
- Metal actuators for high loads
- Graduated adjustment of AH lever
- Selectable direction-dependent contact-making of AH actuator (basic setting: contact-making both sides)

Options

- AS interface versions on request
- Preassembled with customer-specific cables and connectors on request

Design layout


- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC
- All NC contacts with $\ominus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated changeover contact)
- Latching function on request

Mounting

- 2 adjustment slots for M5 screws
- 2 addition holes for M5 mounting screws in safety applications

Installation advantages

- 3 cable entries for through-wiring
- Generously dimensioned connection space
- Screw connections with self-lifting clamping plates
- Easy-to-change switching system thanks to snap-in retainer
- Finely adjustable switching point with adjusting screw




Technical data


Electrical data		
Rated insulation voltage	U _i max.	400 V AC
Conventional thermal current	I _{the}	10 A
Rated operating voltage	U _e max.	240 V
Utilization category	AC-15, A300, U _e /I _e 240 V/3 A	
Short-circuit protection (up to) ^①	Fuse 10 A gL/gG	
Protection class	I	
Mechanical data		
Enclosure material	Aluminium pressure die-casting	
Ambient temperature	−30 °C to + 80 °C	
Mechanical service life	10 x 10 ⁶ switching cycles	
B10d (up to) ^①	20 Mill.	
Switching frequency	max. 100/min.	
Type of connection	Screw connections	
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	
Cable entry	3 x M20 x 1.5	
Protection class	IP 65 conforming to EN 60529, DIN VDE 0470 T1	
Standards		
conforming to EN 60947-1; EN 60947-5-1		

^① Depending on switching system. See Table on Pages 70 – 73.

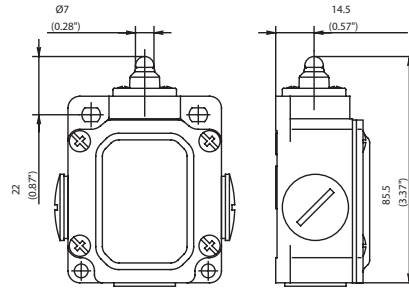W



LIW

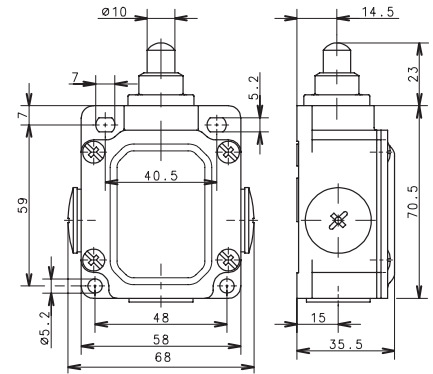


Switching operation

1 NC / 1 NO contact


Slow-action

6033103023
SN2-U1Z W



Snap-action


6033353016
SN2-SU1Z W



Slow-action

Snap-action

6033194022
SN2-SU1 LIW



2 NC contacts

2 NO contacts

1 NC / 1 NO contact
Overlapping

Approvals



Replacement actuator: 3913030537


Replacement actuator: 3912440536

Special features / variants
(on request)


Special features / variants

- Telescopic plunger, particularly long actuation travel of 9 mm

RIW



AHS

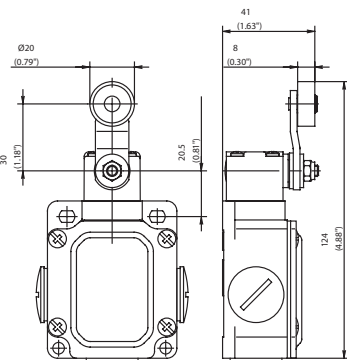

Switching operation

1 NC / 1 NO contact

2 NC contacts


2 NO contacts

1 NC / 1 NO contact
Overlapping


Slow-action

Snap-action

6033117025
SN2-U1Z RIW




6033367017
SN2-SU1Z RIW




Slow-action

Snap-action

6033135002
SN2-U1Z AHS



6033385018
SN2-SU1Z AHS



Approvals



Replacement actuator: 3918170587

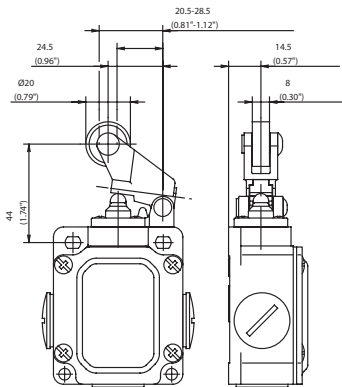
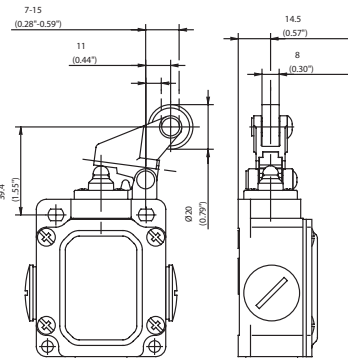
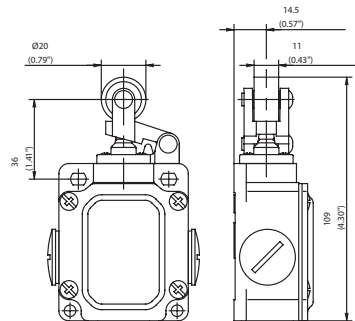
Replacement actuator: 3913351913

Special features / variants
(on request)


- Available with different actuating directions
- With latching function

Special features / variants
(on request)


- Available with different actuating directions

DGHW

DGKW

HW

Slow-action
Snap-action


6033121005
SN2-U1Z
DGHW




6033371004
SN2-SU1Z
DGHW


Slow-action
Snap-action


6033127010
SN2-U1Z
DGKW




6033377011
SN2-SU1Z
DGKW


Slow-action
Snap-action

6033121007
SN2-U1Z HW



6033371006
SN2-SU1Z HW



Replacement actuator: 3918211656

Special features / variants
(on request)

- Available with different actuating directions



Replacement actuator: 3918271655

Special features / variants
(on request)

- Available with different actuating directions




Replacement actuator: 3913210553

Special features / variants
(on request)

- Available with different actuating directions

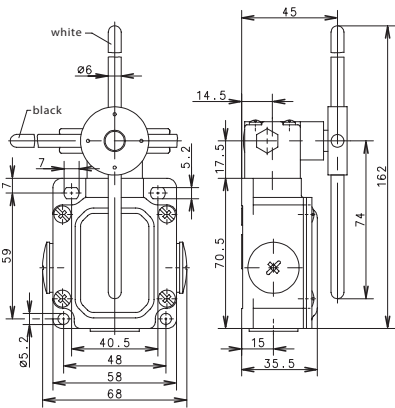AD4K



Switching operation Slow-action Snap-action

1 NC / 1 NO contact

2 NC contacts

6133887022
SN2-SA2Z
AD4K

Functional description of turntable

Diagram showing the switch mechanism in two positions: 12° and 82°. The 12° position is labeled 'Switch-on point at 12°' and the 82° position is labeled 'Switch-off point at 82°'. The diagram also shows the internal contacts and the actuator lever.

2 NO contacts


1 NC / 1 NO contact
Overlapping

Approvals

Replacement actuator: 3913371712
without screws,
without seals
3992000042
accessory bag
(40 screws,
10 seals)

Special features / variants
(on request)

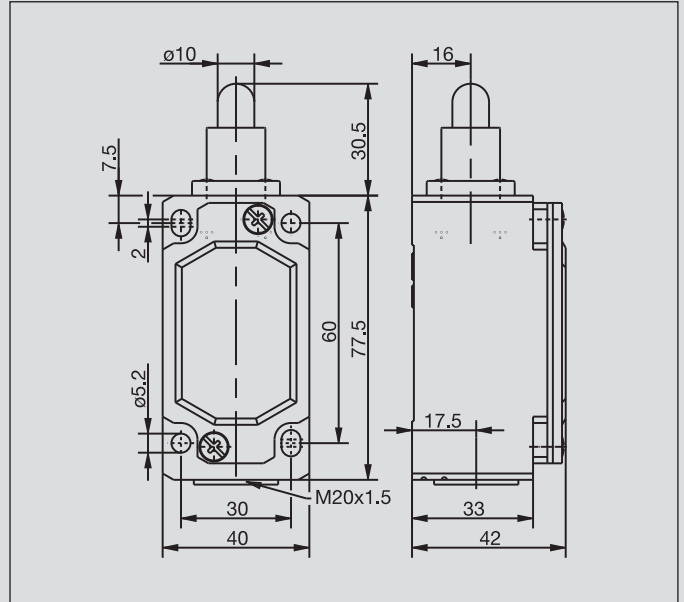ENM2



Recommended use

With its standard enclosure, the ENM2 limit switch can be used universally in all industrial and safety applications.

Product advantages

- Standard switch conforming to DIN EN 50041
- Standard actuator conforming to DIN EN 50041 (see page 16)
- Protection class IP 65 to VDE 0470 T1
- Enclosure: Aluminium pressure die-casting
- Cover: Sheet aluminium
- Actuator can be repositioned by 4 x 90°
- Cable entry M20 x 1.5
- Connection designation conforming to DIN EN 50013
- Metal actuators for high loads

Options

- AS interface versions on request
- Preassembled with customer-specific cables and connectors on request

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC, overlapping contacts
- All NC contacts with $\oplus$ in the circuit diagram are positively opening contacts
- Type: Zb (galvanically isolated changeover contact)

Mounting

- Two M5 adjustment screws with slots
- Two M5 screws for safety applications without additional securing element

Installation advantages


- Screw connections with self-lifting clamping plates
- Easy-to-change switching system thanks to snap-in retainer (depending on type)
- Finely adjustable switching point with adjusting screw
- Captive cover screws
- Enlarged connection space
- Earthing surface on same level as switching system

Technical data


Electrical data	
Rated insulation voltage (up to) ^①	U _i max. 400 V AC
Conventional thermal current (up to) ^①	I _{the} 10 A
Rated operating voltage	U _e max. 240 V
Utilization category (up to) ^①	A300, AC-15, U _e /I _e 240 V/3 A
Short-circuit protection (up to) ^①	Fuse 10 A gL/gG
Protection class	I
Mechanical data	
Enclosure material	Aluminium pressure die-casting
Ambient temperature	-30 °C to + 80 °C
Mechanical service life (up to) ^①	10 x 10 ⁶ switching cycles
B10d (up to) ^①	20 Mill.
Switching frequency	≤ 100/min.
Type of connection	Screw connections
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry	1 x M20 x 1.5
Protection class	IP 65 conforming to IEC/EN 60529
Standards	
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1	

^① Depending on switching system. See Table on Pages 70 – 73.

IW (Form B)



RIW (Form C)




Switching operation

1 NC / 1 NO contact


Slow-action

Snap-action

6087102001
ENM2-U1Z IW




6087352002
ENM2-SU1Z
IW



Slow-action

Snap-action

6087117004
ENM2-U1Z
RIW



6087367005
ENM2-SU1Z
RIW




2 NC contacts

6087802003
ENM2-A2Z IW




6087817006
ENM2-A2Z
RIW



2 NO contacts

1 NC / 1 NO contact
Overlapping

6087302027
ENM2-UV1Z
IW



Approvals



Replacement actuator: 3918020584

Replacement actuator: 3918170587

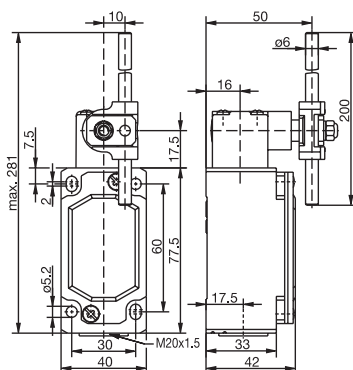
Special features / variants
(on request)

- Also available with following contacts:
2 NC / 1 NO with overlap
1 NC / 2 NO with overlap


Special features / variants
(on request)

- Available with different actuating directions
- High temperature range
- Various roller diameters
- Also available with following contacts:
2 NC / 1 NO with overlap
1 NC / 2 NO with overlap

AD (Form D)



AV

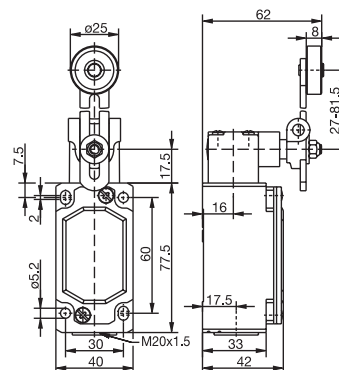

Switching operation

1 NC / 1 NO contact


2 NC contacts

2 NO contacts

**1 NC / 1 NO contact
Overlapping**


Approvals

Slow-action




6087137018
ENM2-U1 AD

Snap-action




6087387019
ENM2-SU1 AD

Slow-action




6087136016
ENM2-U1 AV

Snap-action



6087386017
ENM2-SU1 AV



6187836060
ENM2-E2 AV



Replacement actuator: 3918370731

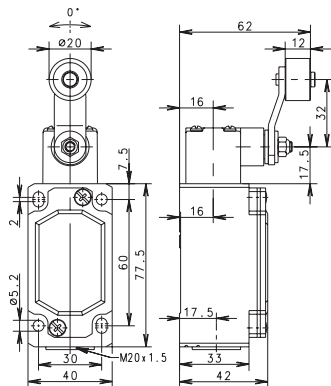
Replacement actuator: 3918360730

Special features / variants
(on request)





- Available with various actuator lengths and actuator directions

Special features / variants
(on request)

- Available with different actuating directions
- Various roller diameters
- Different lever lengths
- With roller over switch

AHZ

Slow-action

6087135030
ENM2-U1Z
AHZ



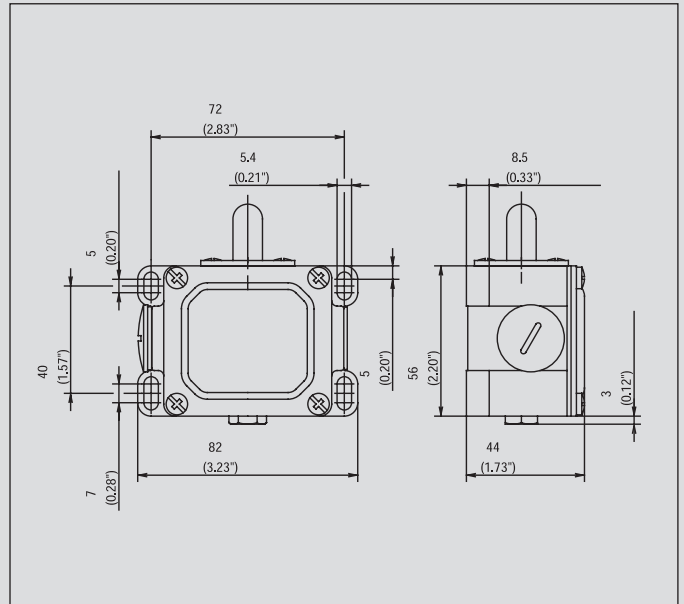
Replacement actuator: –

Special features / variants

- Positively opening action, forward and return AHZ
- For special safety applications, the positive opening action of the normally-closed contacts takes place both in forward (moving in one direction) as well as in return (moving back to home position) direction
- For personal protection applications movement of the roller must be restrained in a guide block in both directions

Metal-Enclosed Limit Switches

D



Recommended use

Heavy duty enclosure for harsh operating conditions with particularly tough design of actuator and switching systems.

Product advantages

- Protection class IP 65 to VDE 0470 T1
- Enclosure: Aluminium pressure die-casting
- Cover: Sheet aluminium
- Actuator can be repositioned by 4 x 90° (depending on type)
- Cable entries 2x M20 x 1.5
- Connection designation conforming to DIN EN 50013
- Sturdy contacts
- Hard wearing guide bushes

Options

- AS interface versions on request
- Preassembled with customer-specific cables and connectors on request

Design layout

- Slow-action and snap-action contacts
- Versions: 1 NC / 1NO, 2 NC, 2 NO, 3 NC, 3 NO, overlapping contacts
- All NC contacts with $\ominus$ in the circuit diagram are positively opening contacts
- Latching function on request

Mounting

- 4 slots for M5 screws

Installation advantages

- 2 cable entries for through-wiring
- Generously dimensioned connection space
- Captive cover screws



Technical data

Electrical data		
Rated insulation voltage	U _i max.	400 V AC
Conventional thermal current (up to) ^①	I _{the}	10 A
Rated operating voltage	U _e max.	240 V
Utilization category	AC-15, U _e /I _e 240 V/3 A	
Short-circuit protection (up to) ^①	Fuse 10 A gL/gG	
Protection class	I	
Mechanical data		
Enclosure material	Aluminium pressure die-casting	
Ambient temperature	-30 °C to + 80 °C	
Mechanical service life	10 x 10 ⁶ switching cycles	
B10d	20 Mill.	
Switching frequency	≤ 100/min.	
Type of connection	Screw connections	
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	
Cable entry	2 x M20 x 1.5	
Protection class	IP 65 conforming to IEC/EN 60529	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1		
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

^① Depending on switching system. See Table on Pages 70 – 73.

W

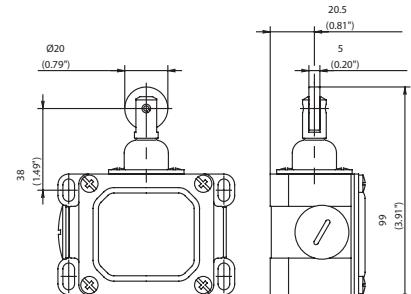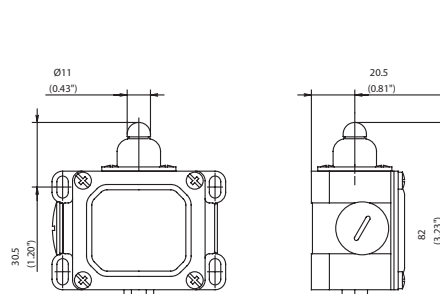RW



Switching operation

Slow-action


Snap-action

Slow-action


Snap-action

1 NC / 1 NO contact


6041103002
D-U1 W




6041153156
D-SU1 W



6041182229
D-U1Z RW




6041168162
D-SU1 RW




2 NC contacts

6041803090
D-A2 W




6041818741
D-A2Z RW




2 NO contacts

6041803046
D-E2 W



6041818052
D-E2 RW



1 NC / 1 NO contact
Overlapping

6041303134
D-UV1Z W



6041318140
D-UV1Z RW



Approvals



Replacement actuator: -

Replacement actuator: -

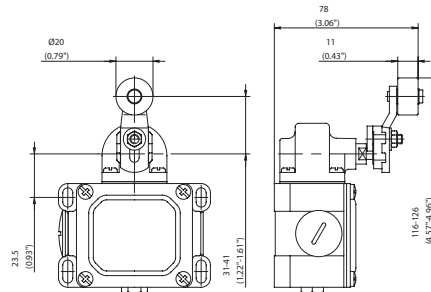
Special features / variants (on request)

- Also available with following contacts:
 - 3 NC contacts
 - 3 NO contacts
 - 2 NC / 2 NO contact (larger enclosure)


Special features / variants (on request)

- Available for high temperature range
- With following contacts:
 - 3 NC contacts
 - 3 NO contacts
 - 2 NC / 2 NO contact (larger enclosure)

AH




HW

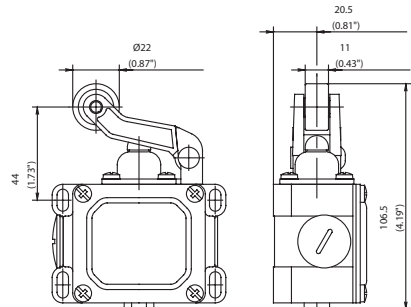


Switching operation

1 NC / 1 NO contact

Slow-action

6041135019
D-U1 AH


Snap-action

6041185173
D-SU1 AH


Slow-action

6041121010
D-U1 HW

Snap-action

6041171164
D-SU1 HW

2 NC contacts

6041835107
D-A2 AH

2 NO contacts

1 NC / 1 NO contact
Overlapping6041321142
D-UV1Z HW

Approvals



Replacement actuator: 3914350924



Replacement actuator: 3914211065

Special features / variants
(on request)

- With steel roller, various roller diameters
- Cranked or straight lever
- Different lever lengths
- Also available with following contacts:
 - 3 NC contacts
 - 2 NC / 2 NO contact

Special features / variants
(on request)

- Available for high temperature range
- With following contacts:
 - 3 NC contacts
 - 2 NC / 2 NO contact (larger enclosure)








Special features / variants

(on request)

- Also available with following contacts:
3 NC contacts
3 NO contacts
2 NC / 2 NO contact
(larger enclosure)

Overview of Actuators

Actuator	Designation	Collar iw = internal w = external	Plastic series					Metal series			
			COMBI	TINY 2	I88	BIGGY 2	ENK	GC I	SN 2	ENM 2	DI
Plunger	-	iw	-	-	-	-	●	-	-	-	-
	-	w	-	●	●	●	-	-	-	-	-
	-	IP 30	●	-	-	-	-	-	-	-	-
	-	IP 43	-	-	-	-	-	-	-	-	○
Ball	KU	iw	-	-	-	-	-	○	○	○	-
Mushroom head	P	w	-	-	-	-	-	-	-	-	●
Telescopic plunger	L	iw	-	-	-	-	-	●	○	○	-
Adjustable plunger	ST	w	-	-	-	-	-	●	○	○	●
Plunger	ST	iw	-	-	-	-	-	●	○	○	-
	ST	IP 30	●	-	-	-	-	-	-	-	-
Button	K	IP 30	●	-	-	-	-	-	-	-	-
Roller	R	IP 30	●	-	-	-	-	-	-	-	-
	R	iw	-	●	○	●	●	●	●	●	-
		w	-	-	-	-	-	-	-	-	●
		IP 43	-	-	-	-	-	-	-	-	○
Roller, long	R ... L	iw	-	○	●	○	-	-	-	-	-
Roller, short	R ... K	iw	-	○	●	○	-	-	-	-	-
Lever	H	IP 30	●	-	-	-	-	-	-	-	-
	H	w	-	●	●	●	●	-	-	-	-
	H, HT	iw	-	-	-	-	-	●	○	○	-
	H/D-WI	w	-	-	-	-	-	●	●	○	●
	HL	iw	-	-	-	-	-	●	○	○	-
	HL/D-H	w	-	-	-	-	-	●	○	○	●
	D - H	IP 43	-	-	-	-	-	-	-	-	○
Pivot joint, lever	DGH	w	-	○	●	○	○	○	●	●	-
Pivot joint, cranked lever	DGK	w	-	○	●	○	○	○	●	●	-
Cranked lever	KN	iw	-	-	-	-	-	●	○	○	-
	KN	w	-	○	●	○	-	●	○	○	○
Cranked lever link	KG	iw	-	-	-	-	-	●	○	○	-
	KG	w	-	○	●	○	-	●	○	○	-
Double roller	DR	iw	-	-	-	-	-	●	○	○	-
Spring feeler	FF	iw	-	-	-	-	-	●	●	○	-
	FF	w	-	●	○	●	●	-	-	-	-
Spring feeler, long	FFL	w	-	-	-	-	-	●	○	○	-
Spindle-mounted lever	AH	iw	-	●	●	●	-	●	○	○	●
Spindle-mounted lever, star clamping	AHS	iw	-	●	●	●	-	○	●	○	-
Spindle-mounted lever, fine spline	AHS-V	iw	-	-	-	-	●	○	●	●	-
Spindle-mounted lever for positive opening in forward / return direction	AHZ	iw	-	-	-	-	-	○	○	●	-
Spindle-mounted lever, adjustable	AV	iw	-	●	●	●	●	●	○	●	●
Spindle-mounted lever, wire	AD	iw	-	●	●	●	●	●	○	●	○
Spindle-mounted lever, spring	AF	iw	-	○	●	○	○	●	●	○	-

Approach direction	Plunger direction	Approach speed/approach angle							Remarks
			m/s	0,1	0,5	1	2	5	
		Metal	A	20°	20°	10°	5°	–	● The values shown in the switching diagrams for switching travel/force refer to plunger direction
			B	20°	20°	10°	5°	–	
		Plastic	A	20°	20°	10°	5°	–	
			B	20°	20°	10°	5°	–	
		Metal	A	30°	5°	–	–	–	● The values shown in the switching diagrams for switching travel/force refer to plunger direction ● Plunger tip adjustable in ST version
			B	30°	5°	–	–	–	
		Plastic	A	30°	5°	–	–	–	
			B	30°	5°	–	–	–	
		Metal	A	30°	30°	20°	10°	5°	● The values shown in the switching diagrams for switching travel/force refer to plunger direction
			B	30°	30°	20°	10°	5°	
		Plastic	A	30°	30°	20°	10°	5°	
			B	30°	30°	20°	10°	5°	
		Metal	A	–	–	–	–	–	● The values shown in the switching diagrams for switching travel/force refer to plunger direction
			B	20°	20°	10°	–	–	
		Plastic	A	–	–	–	–	–	
			B	40°	40°	30°	20°	10°	
		Metal	A	–	–	–	–	–	● The values shown in the switching diagrams for switching travel / force refer to plunger direction ● Adjustable upper section of actuator with roller
			B	20°	20°	10°	–	–	
		Plastic	A	–	–	–	–	–	
			B	40°	40°	30°	20°	10°	
		Metal	A	–	–	–	–	–	● The values shown in the switching diagrams for switching travel / force refer to 90° to plunger direction ● Adjustable upper section of actuator with roller
			B	30°	30°	20°	10°	–	
		Plastic	A	–	–	–	–	–	
			B	40°	40°	40°	30°	20°	
		Metal	A	–	–	–	–	–	● The values shown in the switching diagrams for switching travel / force refer to 90° to plunger direction
			B	30°	30°	20°	10°	–	
		Plastic	A	–	–	–	–	–	
			B	40°	40°	40°	30°	20°	
		Metal	A	–	–	–	–	–	● The values shown in the switching diagrams for switching travel / force refer to plunger direction
			B	40°	40°	30°	20°	–	
		Plastic	A	–	–	–	–	–	
			B	40°	40°	40°	30°	20°	
		Metal	A	45°	45°	40°	30°	–	● The values shown in the switching diagrams for switching travel / force refer to direction of rotation ● Switch position retained after actuation
			B	45°	45°	40°	30°	–	
		Plastic	A	–	–	–	–	–	
			B	–	–	–	–	–	
		Metal	A	60°	50°	45°	–	–	● The values shown in the switching diagrams for switching angle / actuation torque refer to any approach direction ● Not suitable for personal protection
			B	–	–	–	–	–	
		Plastic	A	20°	20°	10°	5°	–	
			B	–	–	–	–	–	
		Metal	A	45°	45°	45°	40°	30°	● The values shown in the switching diagrams for switching angle / actuation torque refer to direction of rotation ● Graduated adjustment of roller lever on spindle with 180° repositioning
			B	45°	45°	45°	40°	30°	
		Plastic	A	45°	45°	45°	40°	30°	
			B	45°	45°	45°	40°	30°	
		Metal	A	45°	45°	45°	40°	30°	● The values shown in the switching diagrams for switching angle / actuation torque refer to direction of rotation ● Graduated adjustment of roller lever on spindle with 180° repositioning ● Not suitable for personal protection
			B	45°	45°	45°	40°	30°	
		Plastic	A	45°	45°	45°	40°	30°	
			B	45°	45°	45°	40°	30°	
		Metal	A	45°	45°	40°	30°	20°	● The values shown in the switching diagrams for switching angle / actuation torque refer to direction of rotation ● Graduate adjustment of rod about pivot axis and in longitudinal direction
			B	45°	45°	40°	30°	20°	
		Plastic	A	45°	45°	40°	30°	20°	
			B	45°	45°	40°	30°	20°	
		Metal	A	45°	45°	40°	30°	20°	● The values shown in the switching diagrams for switching angle / actuation torque refer to direction of rotation ● Graduated adjustment of spring about pivot axis ● Not suitable for personal protection
			B	45°	45°	40°	30°	20°	
		Plastic	A	45°	45°	40°	30°	20°	
			B	45°	45°	40°	30°	20°	

Limit Switch – Spindle-Mounted Lever

Switching devices with spindle-mounted lever enclosure

On delivery, contact-making takes place in both pivot directions corresponding to the switching diagrams.

Adaptation of basic actuator setting on spindle

The basic setting of the device can be varied in steps and fixed for exact positioning:

- AH, AHS, AHZ, AF, AD, AV:
Adjustment in steps of 15° (Fig. 1)
- AHS-V:
Adjustment in steps of 7.5° or 15° (only here →) by repositioning the intermediate piece (Fig. 2)
- Adaptation AV, AD:
Adjustment in radial direction
- AH, AHS, AHS-V, AHZ, AV:
The roller levers can be used in a different axial actuating plane by repositioning by 180° (Fig. 3 and 4)

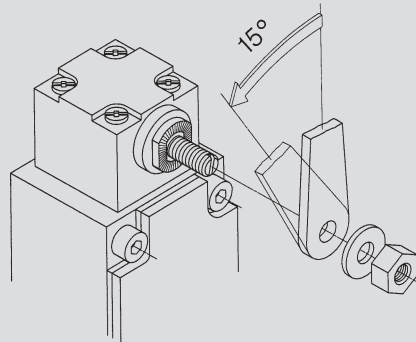


Fig. 1

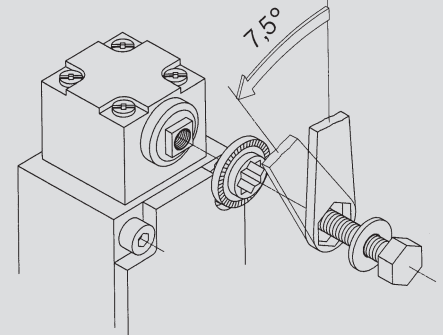


Fig. 2




Fig. 3




Fig. 4

Adaptation of direction-independent switching function

With actuators AHS, AHS-V, AV, AD.

On delivery, contact-making takes place in both pivot directions corresponding to the switching diagrams. An idle function in the required pivot direction is achieved by simply repositioning the actuator cam (Fig. 5 and 6).

The idle function can be used in control systems that cannot process successive rebound pulses caused by oscillatory movement of extremely long AV/AD actuators.

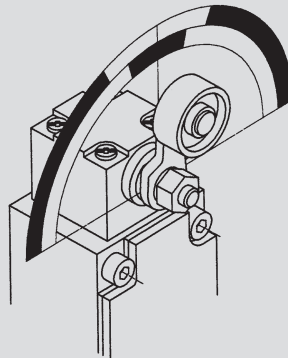


Fig. 5

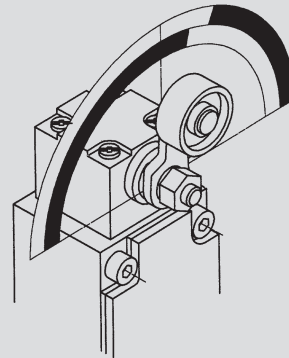


Fig. 6

Positive opening action Forward and return AHZ

For special safety applications, the positive opening action of the normally-closed contacts takes place both in forward (moving in one direction) as well as in return (moving back to home position) direction. For personal protection applications movement of the roller must be restrained in a guide block in both directions (Fig. 7 and 8).

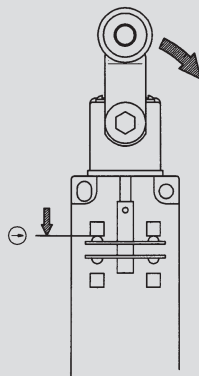


Fig. 7

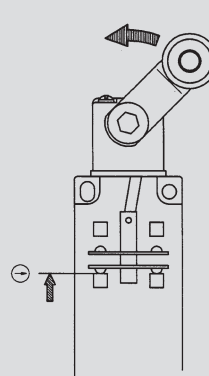


Fig. 8

Note on changing actuators AH, AHS, AHS-V, AHZ, AF, AD, AV, DGH, DGK

The guaranteed as-delivered properties change when the actuation directions are adjusted and when actuators are repositioned by 90°.

The user himself must ensure that the device achieves safe operation for its intended purpose.

Accessories for Insulation-Enclosed Limit Switches

The mounting plates help to prevent over-tightening and damage to the switch.



Article
Series
Article number

Mounting pads
I88
3191871157

Mounting pads
ENK
3191871154

The Finger guard help to prevent the user from an electric shock.

The guide element allows additional support to the rear of the switch.




Article
Series
Article number

Finger guard
I88, Biggy 2, ENK
3595900060

Guide element
I88
3515900209

The mounting plate allows I88 switches to be din rail mounted in control enclosures.



Article
Series
Article number

Mounting plate, control cabinet
I88
3595900087

Sealed cable gland	
M16	M20
3998000120	3998000121



Article
Series
Article number

NPT adapter M16 on 1/2" (NPT 14)
Various families
3998000115

NPT adapter M20 on 1/2" (NPT 14)
Various families
3998000116

Type 1 switches

Slow-action contact			C2 / Ti2							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	2NC	A2Z	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.	250 V	10 A
Changeover contact	1NC/1S	U1Z	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.	250 V	10 A
Changeover contact, overlapping	1NC/1S	UV1Z	–	–	–	–	–	–	–	–
Normally-open contact	2S	E2	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	–	–	–

Snap-action contact			C2 / Ti2							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	2NC	SA2Z	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.	250 V	10 A
Changeover contact	1NC/1S	SU1Z	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.	250 V	10 A
Normally-open contact	2S	SE2	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	–	–	–

Slow-action contact			Bi2							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	2NC	A2Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.	400 V	5 A
Changeover contact	1NC / 1NO	U1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.	400 V	10 A
Changeover contact, overlapping	1NC / 1NO	UV1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.	400 V	10 A
Normally-open contact	2S	E2	–	–	–	–	–	–	–	–

Snap-action contact			Bi2							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	2NC	SA2Z	–	–	–	–	–	–	–	–
Changeover contact	1NC / NO	SU1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 2 A gL/gG	10 x 10 ⁶	20 mill.	400 V	10 A
Normally-open contact	2S	SE2	–	–	–	–	–	–	–	–

Slow-action contact			GC							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	2NC	A2Z	400 V	6 A	–	Fuse 6 A gL/gG	1 x 10 ⁵	0,2 mill. ^①	400 V	10 A
Changeover contact	1NC / 1NO	U1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill. ^②	400 V	10 A
Changeover contact, overlapping	1NC / 1NO	UV1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.	–	–
Normally-open contact	2S	E2	400 V	6 A	–	Fuse 6 A gL/gG	3 x 10 ⁶	–	–	–

① 6021820175 GC-A2 HIW = 20 million ② 60121100622 GC-U1Z VKS, 6121100623 GC-U1Z VKW = 2 million

Snap-action contact			GC							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	2NC	SA2Z	–	–	–	–	–	–	–	–
Changeover contact	1NC / 1NO	SU1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 2 A gL/gG	10 x 10 ⁶	20 mill.	400 V	10 A
Normally-open contact	2S	SE2	–	–	–	–	–	–	–	–

IF				I88					
Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d
AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.	250 V	5 A	AC-15 U _e /I _e 240 V/1.5 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.
AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.*
–	–	–	–	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.
–	–	–	–	250 V	5 A	AC-15 U _e /I _e 240 V/1.5 A	Fuse 6 A gL/gG	1 x 10 ⁶	–

*6116819140 I88-U1Z KS, 6186103005 I88-U1Z W RAST = 2 million

IF				I88					
Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d
AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.	–	–	–	–	–	–
AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 2 A gL/gG	10 x 10 ⁶	20 mill.
–	–	–	–	–	–	–	–	–	–

ENK			
Utilization category	Short-circuit protection	Mechanical service life	B10d
AC-15 U _e /I _e 240 V/1.5 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.
AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.*
AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.
–	–	–	–

*6181135251 ENK-U1Z AHS GU RAST RO50 = 2 million

ENK			
Utilization category	Short-circuit protection	Mechanical service life	B10d
–	–	–	–
AC-15 U _e /I _e 240 V/3 A	Fuse 2 A gL/gG	10 x 10 ⁶	20 mill.
–	–	–	–

SN2				ENM2					
Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d
AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	10 x 10 ⁶	20 mill.	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.
AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	–	20 mill.	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.*
–	–	–	–	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.
–	–	–	–	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	–

*6087135013 ENM2-U1Z AHS-V, 6087135030 ENM2-U1Z AHZ = 2 million

SN2				ENM2					
Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d
–	–	–	–	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	6 mill.
AC-15 U _e /I _e 240 V/3 A	Fuse 2 A gL/gG	10 x 10 ⁶	20 mill.	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 2 A gL/gG	10 x 10 ⁶	20 mill.
–	–	–	–	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	3 x 10 ⁶	–

Type 1 switches

Slow-action contact			D					
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d
Normally-closed contact	2NC	A2Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.
Changeover contact	1NC/1S	U1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.
Changeover contact, overlapping	1NC/1S	UV1Z	400 V	16 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.
Normally-open contact	2S	E2	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	–

Snap-action contact			D					
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d
			–	–	–	–	–	–
Normally-closed contact	2NC	SA2Z	–	–	–	–	–	–
Changeover contact	1NC/1S	SU1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	10 x 10 ⁶	20 mill.
Normally-open contact	2S	SE2	–	–	–	–	–	–

Type 2 switches

Slow-action contact			SKT							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	1NC	A1Z								
Normally-closed contact	2NC	A2Z	250 V	10 A	AC-15 U _e /I _e 240 V/3 A DC-13 U _e /I _e 250 V / 0.27 A	Fuse 6 A gL/gG	A* 1 x 10 ⁶ B* 1 x 10 ⁵	2 mill.	250 V	10 A
Changeover contact	1NC/1S	U1/U1Z	250 V	10 A	AC-15 U _e /I _e 240 V/3 A DC-13 U _e /I _e 250 V / 0.27 A	Fuse 6 A gL/gG	A* x 10 ⁶ B* 1 x 10 ⁵	2 mill.	250 V	10 A
Changeover contact, overlapping	2NC/1S	UV15Z	250 V	5 A	–	–	–	–	250 V	5 A

*A = Standard; B = Increased actuating force

Slow-action contact			SK							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	1NC	A1Z	–	–	–	–	–	–	–	–
Normally-closed contact	2NC	A2Z	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.	250 V	10 A
Changeover contact	1NC/1S	U1/U1Z	250 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	1 x 10 ⁶	2 mill.	250 V	10 A
Changeover contact, overlapping	2NC/1S	UV15Z	400 V	5 A	AC-15 U _e /I _e 240 V/1.5 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.	–	–

Slow-action contact			ENM2							
Switching function	Switching contacts	Designation	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}
Normally-closed contact	1NC	A1Z	–	–	–	–	–	–	–	–
Normally-closed contact	2NC	A2Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.	400 V	6 A
Changeover contact	1NC/1S	U1/U1Z	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	1 x 10 ⁶	2 mill.	400 V	10 A
Changeover contact, overlapping	2NC/1S	UV15Z	250 V	5 A	AC-15 U _e /I _e 240 V/1.5 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.		

U_i Rated insulation voltage
I_{the} Conventional thermal output from devices in enclosure

SKI				SKC					
Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d
				250 V	5 A	AC-15 U _e /I _e 240 V/1,5 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.
AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	A* 1 x 10 ⁶ B* 1 x 10 ⁵	2 mill.	–	–	–	–	–	–
AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	A* 1 x 10 ⁶ B* 1 x 10 ⁵	2 mill.	–	–	–	–	–	–
AC-15 U _e /I _e 240 V/1,5 A	Fuse 6 A gL/gG	A* 1 x 10 ⁶ B* 1 x 10 ⁵	2 mill.	–	–	–	–	–	–


*A = Standard; B = Increased actuating force

I88				ENK					
Utilization category	Short-circuit protection	Mechanical service life	B10d	U _i	I _{the}	Utilization category	Short-circuit protection	Mechanical service life	B10d
–	–	–	–	–	–	–	–	–	–
AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	1 x 10 ⁵	2 mill.	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.
–	–	–	–	400 V	10 A	AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	1 x 10 ⁶	2 mill.
				400 V	5 A	AC-15 U _e /I _e 240 V/1,5 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.

GC			
Utilization category	Short-circuit protection	Mechanical service life	B10d
–	–	–	–
AC-15 U _e /I _e 240 V/3 A	Fuse 6 A gL/gG	1 x 10 ⁶	2 mill.
AC-15 U _e /I _e 240 V/3 A	Fuse 10 A gL/gG	1 x 10 ⁶	2 mill.

Safety Switches with Separate Actuator

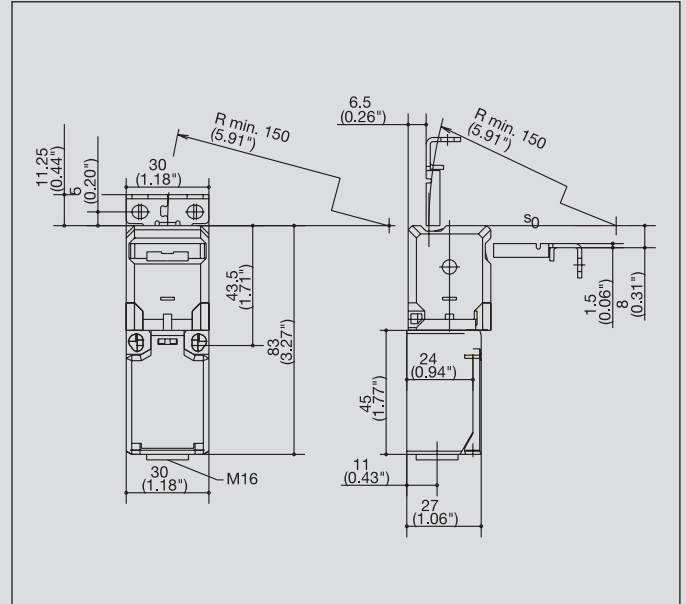SKT



Safety switches with separate actuator are positive opening position switches. In terms of design, the switching element and actuator are separated. On actuation, the switching element and actuator are either brought together or separated. The positive opening NC contact is always open when the actuator is withdrawn. These switches are assigned to Type 2.

BERNSTEIN offers various versions of these Type 2 switches. The differences and advantages of the individual switch groups are outlined in the following.

The SKT is the smallest safety switch with a separate actuator. It is particularly suited for applications that require an extremely slim and short switch design. Its rotary head, two actuator openings and various switching functions underscore its versatility in extremely confined spaces.

Added to this, the SKT features other options to meet any requirements:

- **Integrated eject function (FE):**


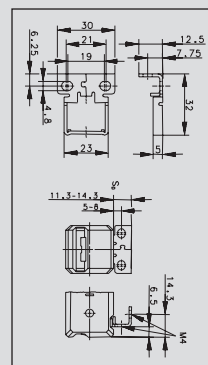
The actuator is ejected if the door is not locked securely. Consequently, the safety contact is opened, thus preventing the machine from starting up. In addition, this function makes it apparent that the door still needs to be locked.

- **Actuating force (up to 50 N):**

The standard actuating force is 10 N. Depending on the switch variant, an actuating force of 50 N can also be selected. In many applications, hatches and doors need to be secured to prevent them being opened unintentionally. This is achieved by means of bolts, fasteners or other latching mechanisms. The SKI safety switch should be selected for applications requiring increased actuating force.

- **Universal Hinged Actuator (MRU):**

The MRU actuator is ideally suited for applications where the installation conditions severely restrict the actuating travel or radius. It has an adjustable actuating radius in the horizontal and vertical plane.



R_{min} 150 mm
Actuating forces FE to FI50

Technical data

Electrical data		
Rated insulation voltage	U _i max.	250 V
Rated operating voltage	U _e max.	240 V AC
Conventional thermal current	I _{the}	10 A
Utilization category	AC-15, U _e /I _e 240 V / 3 A; DC-13, U _e /I _e 250 V / 0.27 A	
Mechanical data		
Switching frequency	≤ 30/min	
Mechanical service life Standard	1 x 10 ⁶ switching cycles	
Mechanical service life increased actuator holding force	1 x 10 ⁵ switching cycles	
B10d (up to) ^①	2 Mill.	
Short-circuit protection	Fuse 6 A gL/gG	
Protection class	II, Insulated	
Ambient temperature	-30 °C to + 80 °C	
Protection class	IP 65 conforming to IEC/EN 60529	
Type of connection	Screw connections	
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	
Enclosure	Thermoplastic, glass fibre-reinforced (UL94-V0)	
Cable entry	M16 x 1.5	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

① Depending on switching system. See Table on Pages 70 – 73.

Safety Switches with Separate Actuator

SK



The SK safety position switch is an industry standard and can be used in virtually any application.

Thanks to design safety features conforming to VDE 0660 T200, IEC 60947-5-1 and the test regulations GS-ET 15, the SK is particularly suitable for personal protection applications. Its versatility is enhanced by the variable actuator head and two actuator openings.

Other decisive advantages include:

- **Different actuating forces:**

Corresponding to your specific application, in addition to the standard 10 N, you can also choose an actuating force of 5, 20 or 30 N.


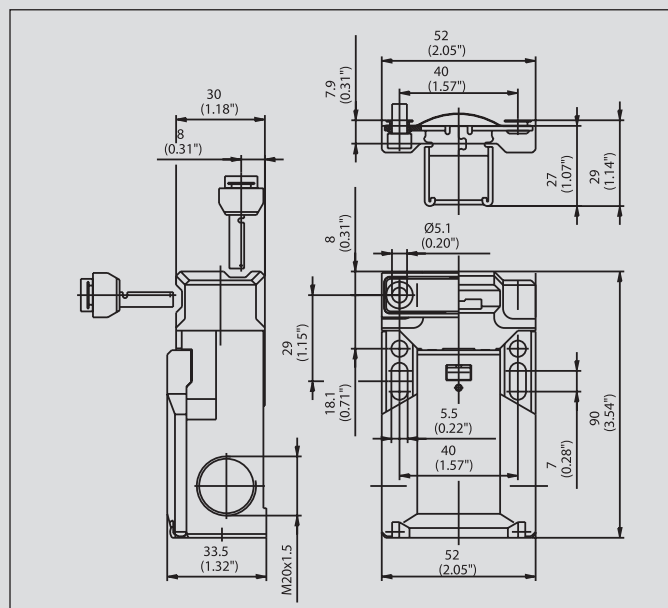
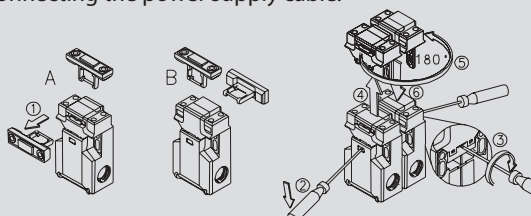
Actuating forces from 30 to 100 N can be realised with the aid of additional components that are mounted on the outside of the switch.

- **Anti-tamper facility:**


The switching system is protected by multiple coding to ensure enhanced safety of your application.

- **Outstanding handling:**

With the two slots you can easily adjust the SK safety switch and lock it in position by means of the two holes accessible from the top or the two holes accessible from the front. The switch can be wired from three different sides. A transparent cover prevents foreign particles from entering the contact space while connecting the power supply cable.



50 mm to direction of adjustment
Actuator: metal



Technical data

Electrical data		
Rated insulation voltage (up to) ^①	U _i max.	400 V AC
Rated operating voltage	U _e max.	240 V
Conventional thermal current (up to) ^①	I _{the}	10 A
Utilization category	AC-15, U _e /I _e 240 V / 1.5 A	
Mechanical data		
Switching frequency	≤ 30/min	
Mechanical service life	1 x 10 ⁶ switching cycles	
B10d (bis zu) ^①	2 Mill.	
Short-circuit protection (up to) ^①	Fuse 10 A gL/gG	
Protection class	II, Insulated	
Ambient temperature	-30 °C ... + 80 °C	
Protection class	IP 65 conforming to IEC/EN 60529	
Type of connection	Screw connections	
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	
Enclosure	Thermoplastic, glass fibre-reinforced (UL94-V0)	
Cable entry	3 x M20 x 1.5	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1		
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

① Depending on switching system. See Table on Pages 70 – 73.

SKC



In terms of lengths, the SKC safety position switch is the 15 mm shorter variant of the SK. This makes it the right choice for confined installation conditions.

The SKC otherwise offers the same advantages as the SK: Industrial standard with particular emphasis on safety, personal protection and a variable actuator head with two actuator openings.

Other decisive advantages include:

- **Different actuating forces:**

Corresponding to your specific application, in addition to the standard 10 N, you can also choose an actuating force of 5, 20, 30 or 50 N.

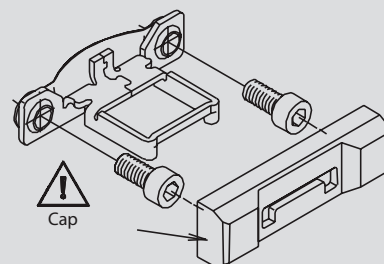
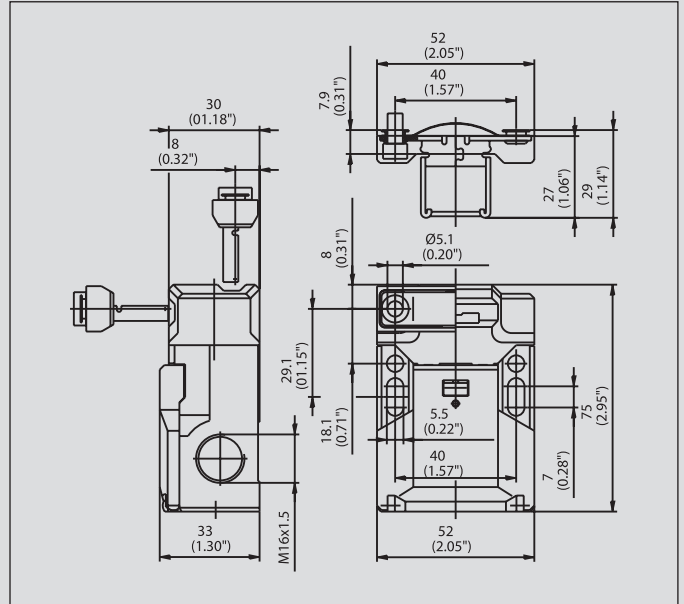
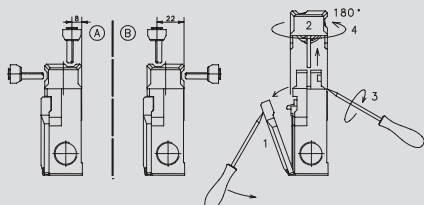
Actuating forces from 30 to 100 N can be realised with the aid of additional components that are mounted on the outside of the switch.

- **Anti-tamper facility:**


The switching system is protected by multiple coding to ensure enhanced safety of your application.

- **Outstanding handling:**

With the two slots you can easily adjust the SKC safety switch and lock it in position by means of the two holes accessible from the top or the two holes accessible from the front. The switch can be wired from three different sides. A transparent cover prevents foreign particles from entering the contact space while connecting the power supply cable.



R_{min} 150 mm (5.9")
Actuator: Metal




Technical data

Electrical data		
Rated insulation voltage	U _i max.	250 V AC
Rated operating voltage	U _e max.	240 V
Conventional thermal current	I _{the}	5 A
Utilization category	AC-15, U _e /I _e 240 V / 1.5 A	
Mechanical data		
Switching frequency	≤ 30/min.	
Mechanical service life	1 x 10 ⁶ switching cycles	
B10d (up to) ^①	2 Mill.	
Short-circuit protection	Fuse 6 A gL/gG	
Protection class	II, Insulated	
Ambient temperature	-30 °C ... + 80 °C	
Protection class	IP 65 conforming to IEC/EN 60529	
Type of connection	Screw connections	
Conductor cross sections	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	
Enclosure	Thermoplastic, glass fibre-reinforced (UL94-V0)	
Cable entry	3 x M16 x 1.5	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1		
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		


① Depending on switching system. See Table on Pages 70 – 73.

Safety Switches with Separate Actuator

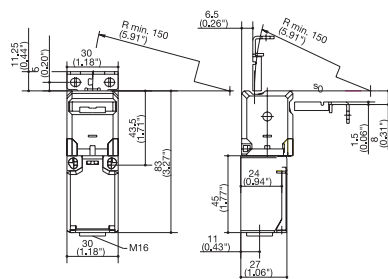SKT



SKI

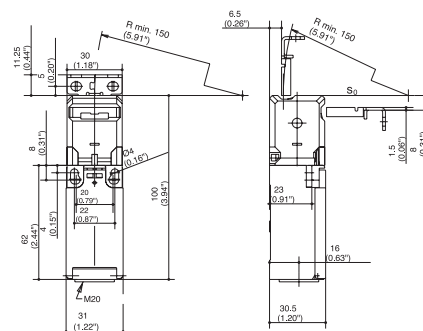



Switching operation	Standard	High actuating force	Radius actuation	Standard	High actuating force	Radius actuation
1 NC / 1 NO contact	6016419059 SKT-U1Z M3			6016819052 SKI-U1Z M3	6016819139 SKI-U1Z FI50 M3	6016819123 SKI-U1Z MRU
1 NC contacts						
2 NC contacts	6016469066 SKT-A2Z M3			6016869056 SKI-A2Z M3		6016869122 SKI-A2Z MRU
1 NC / 1 NO contact Overlapping				6016869058 SKI-UV15Z M3	6016869145 SKI-UV15Z FI50 M3	6016869131 SKI-UV15Z MRU
Approvals	  					

Special features / variants
(on request)

- Replacement actuator for:
3112850340

Special features / variants
(on request)

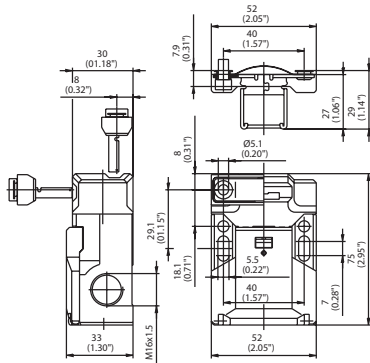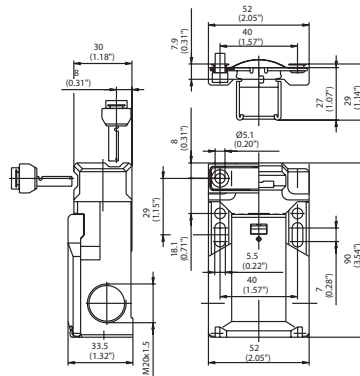- Replacement actuator for:
Standard **3112850340**
High actuating force **3112850340**
Radius actuation **3911452058**

SKC

SK


Standard	High actuating force	Radius actuation
----------	----------------------	------------------

Standard	High actuating force	Radius actuation
----------	----------------------	------------------

6016169039 SKC-A1Z M	6116169016 SKC-A1Z F30 M	6016169087 SKC-A1Z MRU
--------------------------------	------------------------------------	----------------------------------

6016119016 SK-U1Z M	6116119109 SK-U1Z F30 M	6016119084 SK-U1Z MRU
-------------------------------	-----------------------------------	---------------------------------

6016169036 SK-A2Z M	6016169053 SK-A2Z F30 M	6016169085 SK-A2Z MRU
-------------------------------	-----------------------------------	---------------------------------

6016169026 SK-UV15Z M	6016169061 SK-UV15Z F30 M	6016169086 SK-UV15Z MRU
---------------------------------	-------------------------------------	-----------------------------------


Special features / variants

(on request)

- 50 N and 100 N actuating force on request
- Replacement actuator for:

Standard	3911452116
High actuating force	3911451914
Radius actuation	3911452058

Special features / variants

(on request)

- 100 N actuating force on request
- Replacement actuator for:

Standard	3911452116
High actuating force	3911451914
Radius actuation	3911452058

Safety Switches with Separate Actuator

Switch with VTW, VTU, VT actuator



These position switches of the tried-and-tested switch families I88, ENK, ENM2 and GC correspond to Type 2.

This means that you can use Type 1 and Type 2 position switches corresponding to your applications while using one family of switches.



This results in many advantages:

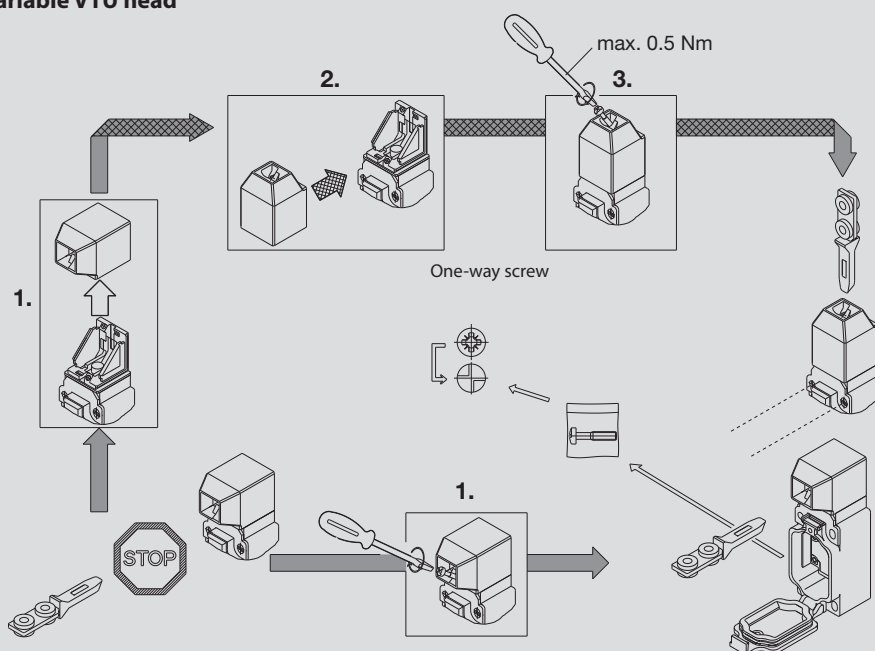
- **Standardisation:**

Switches of one family have the same mounting dimensions and the same electrical properties.


- **Reduced costs:**

I88, ENK, ENM2 and GC are used in large quantities. This not only reflects the quality of the products but also means lower prices compared to special designs used in small quantities.


Variable VTU head



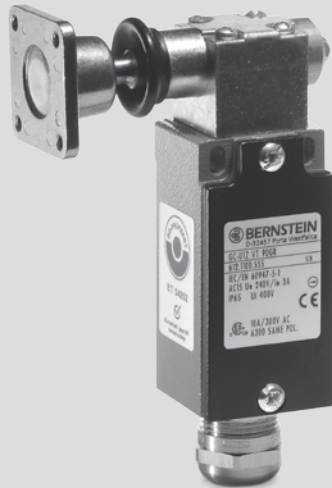Repositioning the actuator head either in horizontal or vertical direction results in 8 approach actuator directions.



GC-VT

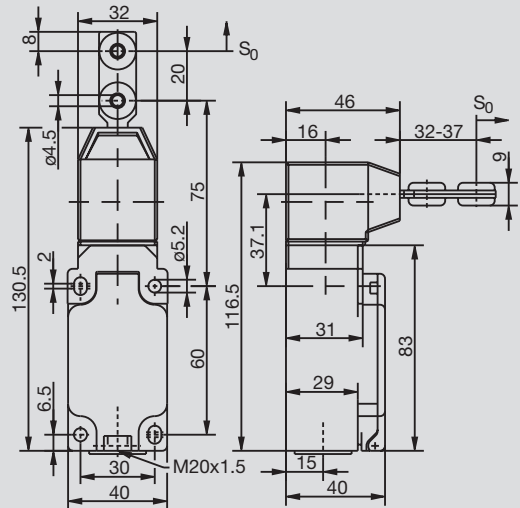


Technical data

		I88	ENK	ENM2	GC
Electrical data					
Rated insulation voltage	U_i	250 V AC	400 V AC	400 V AC	400 V AC
Conventional thermal current (up to) ^①	I_{the}	10 A	10 A	10 A	10 A
Rated operating voltage	U_e	240 V	240 V	240 V	240 V
Utilization category (up to) ^①		AC-15, U_e / I_e 240 V / 3 A	AC-15, U_e / I_e 240 V / 3 A	AC-15, U_e / I_e 240 V / 3 A	AC-15, U_e / I_e 240 V / 3 A
Forced disconnection	↻	conforming to IEC/EN 60947-5-1, Addendum K	conforming to IEC/EN 60947-5-1, Addendum K	conforming to IEC/EN 60947-5-1, Addendum K	conforming to IEC/EN 60947-5-1, Addendum K
Short-circuit protection (up to) ^①		Fuse 10 A gL/gG	Fuse 10 A gL/gG	Fuse 10 A gL/gG	Fuse 10 A gL/gG
Protection class		II, Insulated	II, Insulated	I	I
Mechanical data					
Enclosure		Thermoplastic, glass fibre-reinforced (UL 94-V0)	Thermoplastic, glass fibre-reinforced	Aluminium pressure die-casting	Aluminium pressure die-casting
Cover		Thermoplastic, glass fibre-reinforced (UL 94-V0)	Thermoplastic, glass fibre-reinforced	Sheet aluminium	Sheet aluminium
Actuation		Separate actuator, Thermoplastic	Separate actuator, (St/PA), Actuator (PA6 GV/Zn-GD)	Separate actuator, (St / PA)	Separate actuator
Ambient temperature		-30°C to + 80°C	-30°C to + 80°C	-30°C to + 80°C	-30°C to + 80°C
Mechanical service life		1 x 10 ⁶ switching cycles	1 x 10 ⁶ switching cycles	1 x 10 ⁶ switching cycles	1 x 10 ⁶ switching cycles
B10d		2 mill.	2 mill.	2 mill.	2 mill.
Switching frequency		≤ 50/min.	max. 30/min.	≤ 50/min.	≤ 10/min.
Mounting		2 x M4	4 x M5	4 x M5	2 x M4
Type of connection		Screw connections	Screw connections	Screw connections	Screw connections
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry		1 x M20 x 1.5	1 x M20 x 1.5	1 x M20 x 1.5	1 x M20 x 1.5
Weight		≈ 0.09 kg	≈ 0.23 kg	≈ 0.33 kg	≈ 0.32 kg
Installation position		Any	Any	Any	Any
Protection class		IP 65 conforming to EN 60529	IP 65 conforming to EN 60529	IP 65 conforming to EN 60529	IP 65 conforming to EN 60529
Standards					
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1					


① Depending on switching system. See Table on Pages 70 – 73.

Safety Switches with Separate Actuator

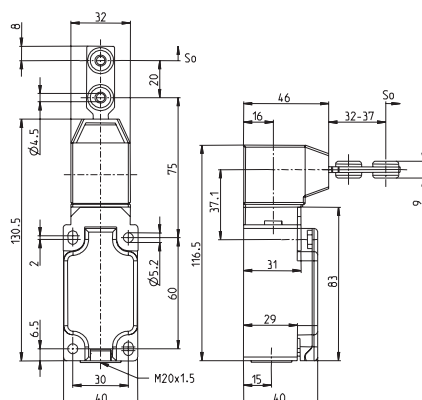ENK VTU



ENM2 VTW

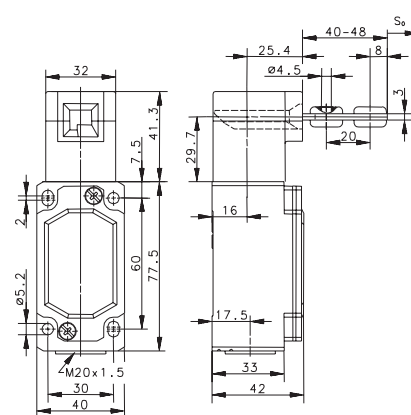

Switching operation

Standard High actuating force Radius actuation

1 NC / 1 NO contact

6016619132
ENK-U1Z VTU

6016219100
ENM2-U1Z VTW

2 NC contacts

6016669133
ENK-A2Z VTU

6016269105
ENM2-A2Z VTW

1 NC / 1 NO contact
Overlapping

6016669154
ENK-UV15Z VTU

Approvals



Replacement actuator: 3911702228

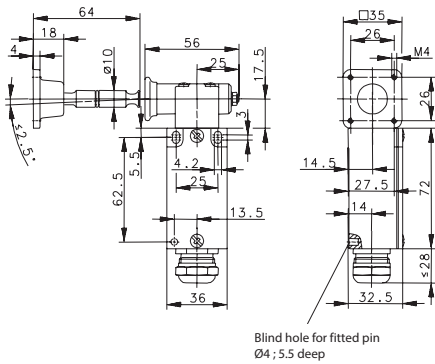
Replacement actuator: 3911702228

Special features / variants (on request)

- All actuators specified under "Safety Switches with Separate Actuator and Latching Device (SLK/SLM)" can be used for these switches

Special features / variants (on request)

- All actuators specified under "Safety Switches with Separate Actuator and Latching Device (SLK/SLM)" can be used for these switches

GCVT

Standard
High actuating force
6121100555

GC-U1Z VT 90GR

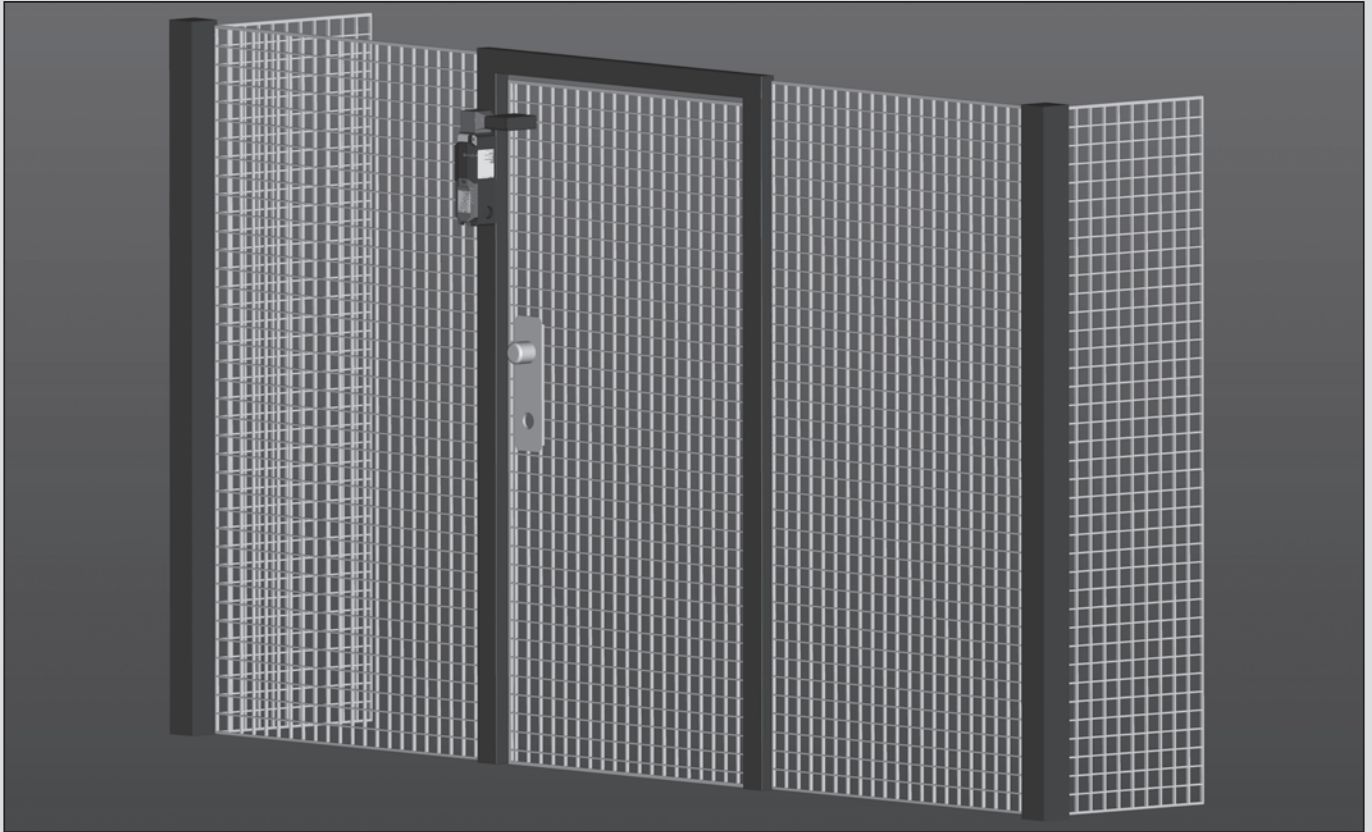
6116769064

GC-A2Z VT 90GR

Replacement actuator: 3912001275
Special features / variants
(on request)

Safety Switches with Separate Actuator and Interlock

SLK



Machines that continue running after being switched off are often part of automated production processes. Safety guards prevent operator access and must therefore be kept closed until the hazards posed by machine movement have ceased.

Safety position switches with interlock function ensure that safety gates, safety doors and other protective guards remain closed for as long as a hazardous situation exists.

In production processes safety position switches have three main tasks:

- Enabling the machine / process when the safety guard is closed and interlocked
- Disabling the machine / process when the safety guard is opened
- Position monitoring of the safety guard and interlock

The SLK / SLM safety position switches with separate actuators and interlock enable the user to realise locking systems conforming to EN 1088, EN ISO 12100-1, 12100-2 and since 29.12.2009 to the compulsory Machinery Directive 2006/42/EC.

System description

SLK / SLM safety position switches with interlock function are available in versions with spring force locking action and magnetic force locking action. The separate actuator is connected formfit with the safety guard. It transfers the locking force to the safety guard and monitors its position. Thanks to its triple coding, the separate actuator ensures a high degree of antitamper security. The interlock facility in association with the SLK / SLM safety position switches is integrated in the switch enclosure. To lock the actuator in connection with a switching mechanism, the required interlock is achieved by means of a spring mechanism in the spring force locked version and by an electromagnet in the magnetic force locked version.

Locking principle

Spring force (closed-circuit current)

The safety guard is locked automatically when the actuator is inserted to its end position. It is unlocked by energising the electromagnet, allowing the safety guard to be opened.

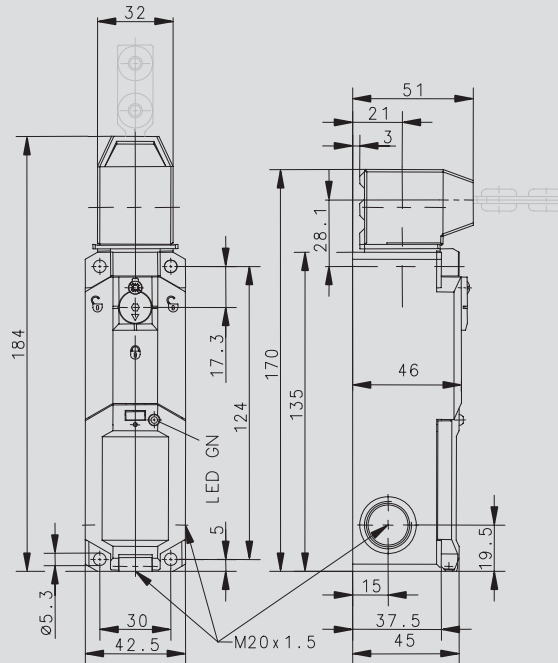
Magnetic force (working current)

The lock (interlock) is deactivated when the electromagnet is de-energised in the event of a fault in actuation or power failure. This allows the safety guard to be opened.

Product advantages

- Two independent safety circuits ensure reliable integration
 - With two contacts, circuit 1 monitors the actuator
 - With two contacts, circuit 2 monitors the interlock

The contact configuration is variable and may deviate from the selection table if required.
- Two different operating voltages for universal integration:
 - 24 V AC / DC
 - 110 V / 230 V AC
- Rotary actuating head (4x 90°) as well as horizontal and vertical actuation ensure complete flexibility in use
- Compact design with short overall size of only 170 mm
- Innovative installation with spring-loaded terminals
- Function conforming to GS ET 19, EN 60 204-1, EN 60 947-1 and EN 60 947-5-1



The actuator is not included and must be ordered separately.

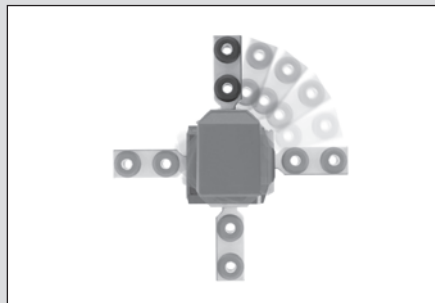
Safe operation

The stainless steel actuator ensures safe and reliable operation. Its coding prevents tampering and bypassing the system "in an easier way". The radius actuator is ideal for monitoring smaller safety gates. It can be preset horizontally or vertically and is also made from stainless steel.




Flexible in use

The SLK safety switch can be actuated in a horizontal and vertical direction. Prior to installation it is preset by simply repositioning the head section. This flexibility in installation is achieved by positioning the actuator head in steps of 4 x 90°.



New symbol according to ISO 14119 for the interlocking contact:

Contacts labelled with this symbol in the switching travel diagram in the operating and installation instructions are safely positively driven contacts which monitor the interlocking position. This only concerns interlocking switches equipped with a fail-locking system. That means the interlocking function can only be activated if the actuator has been inserted in the switch. As a result, it is only possible to monitor the safe door position and the interlocking function only with the contacts of the interlocking function.



Innovative installation

The SLK is electrically connected safely and reliably by means of terminals. Spring loaded terminals are used, into which the wires with ferrules can be inserted without the need for tools. The fact that the connection compartment is separate from the functional parts contributes to ensuring secure and reliable connection. The connection compartment conforms to protection class IP 67.

IMPORTANT: The actuator for the SLK must be ordered separately. You will find a corresponding overview on Pages 90 – 91.

Safety Switches with Separate Actuator and Interlock

SLK

Product selection

Article number	Designation	Locking action	Supply voltage	Contacts Actuator	Interlock	Additional function
6018119045	SLK-F-UC-55-R1-A0-L0-0	Spring	24 Volt AC / DC	1NC / 1NO	1NC / 1NO	Auxiliary release
6018119066	SLK-F-UC-55-R1-A0-L1-0	Spring	24 Volt AC / DC	1NC / 1NO	1NC / 1NO	Auxiliary release, LED
6018169054	SLK-F-UC-22-R1-A0-L0-0	Spring	24 Volt AC / DC	2 NC	2 NC	Auxiliary release
6018169050	SLK-F-UC-25-R1-A0-L0-0	Spring	24 Volt AC / DC	2 NC	1NC / 1NO	Auxiliary release
6018169068	SLK-F-UC-25-R1-A0-L1-0	Spring	24 Volt AC / DC	2 NC	1NC / 1NO	Auxiliary release, LED
6018119061	SLK-F-UC-55-R2-A0-L0-0	Spring	24 Volt AC / DC	1NC / 1NO	1NC / 1NO	Emergency release
6018169055	SLK-F-NC-22-R1-A0-L0-0	Spring	110 / 230 AC	2 NC	2 NC	Auxiliary release
6018119046	SLK-F-NC-55-R1-A0-L0-0	Spring	110 / 230 AC	1NC / 1NO	1NC / 1NO	Auxiliary release
6018119067	SLK-F-NC-55-R1-A0-L1-0	Spring	110 / 230 AC	1NC / 1NO	1NC / 1NO	Auxiliary release, LED
6018169051	SLK-F-NC-25-R1-A0-L0-0	Spring	110 / 230 AC	2 NC	1NC / 1NO	Auxiliary release
6018169069	SLK-F-NC-25-R1-A0-L1-0	Spring	110 / 230 AC	2 NC	1NC / 1NO	Auxiliary release, LED
6018119047	SLK-M-UC-55-R0-A0-L0-0	Magnet	24 Volt AC / DC	1NC / 1NO	1NC / 1NO	
6018169052	SLK-M-UC-25-R0-A0-L0-0	Magnet	24 Volt AC / DC	2 NC	1NC / 1NO	
6018169056	SLK-M-UC-22-R0-A0-L0-0	Magnet	24 Volt AC / DC	2 NC	2 NC	
6018119048	SLK-M-NC-55-R0-A0-L0-0	Magnet	110 / 230 AC	1NC / 1NO	1NC / 1NO	
6018169053	SLK-M-NC-25-R0-A0-L0-0	Magnet	110 / 230 AC	2 NC	1NC / 1NO	
6018169057	SLK-M-NC-22-R0-A0-L0-0	Magnet	110 / 230 AC	2 NC	2 NC	

Technical data

	Spring 24 Volt AC / DC	Spring 110 / 230 AC	Magnet 24 Volt AC / DC	Magnet 110 / 230 AC
Electrical data				
Rated insulation voltage U_i	250 V	250 V	250 V	250 V
Utilization category	AC-15, U_e / I_e 230 V / 2.5 A	AC-15, U_e / I_e 230 V / 2.5 A	AC-15, U_e / I_e 230 V / 2.5 A	AC-15, U_e / I_e 230 V / 2.5 A
Conventional thermal current I_{the}	5 A	5 A	5 A	5 A
Short-circuit protection	4 A gL	4 A gL	4 A gL	4 A gL
Protection class	II, Insulated	II, Insulated	II, Insulated	II, Insulated
Electromagnet				
Duty factor	100 % ED (an E1; E2)	100 % ED (an E1; E2)	100 % ED (an E1; E2)	100 % ED (an E1; E2)
Thermal class	F (155 °C)	F (155 °C)	F (155 °C)	F (155 °C)
Switch-on power	12 VA (0.2 s)	65 VA (0.1 s)	12 VA (0.2 s)	12 VA (0.2 s)
Continuous power	4.4 VA	8 VA	4.4 VA	4.4 VA
Mechanical data				
Enclosure	Thermoplastic GV (UL94-V0)	Thermoplastic GV (UL94-V0)	Thermoplastic GV (UL94-V0)	Thermoplastic GV (UL94-V0)
Cover	Thermoplastic GV (UL94-V0)	Thermoplastic GV (UL94-V0)	Thermoplastic GV (UL94-V0)	Thermoplastic GV (UL94-V0)
Actuator	Thermoplastic GV / Zn-GD	Thermoplastic GV / Zn-GD	Thermoplastic GV / Zn-GD	Thermoplastic GV / Zn-GD
Ambient temperature	-25 °C to + 70 °C	-25 °C to + 70 °C	-25 °C to + 70 °C	-25 °C to + 70 °C
Switching function	2 NC contacts, 2 NO contacts	2 NC contacts, 2 NO contacts	4 NC contacts	2 NC contacts, 2 NO contacts
Switching principle	4 Slow-action contacts	4 Slow-action contacts	4 Slow-action contacts	4 Slow-action contacts
Mechanical service life	1 x 10 ⁶ switching cycles (max. 600 switching cycles / h)	1 x 10 ⁶ switching cycles (max. 600 switching cycles / h)	1 x 10 ⁶ switching cycles (max. 600 switching cycles / h)	1 x 10 ⁶ switching cycles (max. 600 switching cycles / h)
B10d	2 mill.	2 mill.	2 mill.	2 mill.
Minimum actuating radius R_{min}	See datasheet, actuator	See datasheet, actuator	See datasheet, actuator	See datasheet, actuator
Approach speed V_{max}	0.5 m/s	0.5 m/s	0.5 m/s	0.5 m/s
Mounting	4 x M5	4 x M5	4 x M5	4 x M5
Cross sections	0.5 – 1.5 mm ²	0.5 – 1.5 mm ²	0.5 – 1.5 mm ²	0.5 – 1.5 mm ²
Type of connection	Cage clamp terminal	Cage clamp terminal	Cage clamp terminal	Cage clamp terminal
Cable entry	3 x M20 x 1.5	3 x M20 x 1.5	3 x M20 x 1.5	3 x M20 x 1.5
Weight	≈ 0.34 kg	≈ 0.30 kg	≈ 0.30 kg	≈ 0.35 kg
Protection class	IP67 conforming to IEC/EN 60529	IP67 conforming to IEC/EN 60529	IP67 conforming to IEC/EN 60529	IP67 conforming to IEC/EN 60529
Installation position	Any	Any	Any	Any
Locking principle	Spring force	Spring force	Magnetic force	Magnetic force
Latching force FZh	≤ 1500 N to GS-ET-19	≤ 1500 N to GS-ET-19	≤ 1500 N to GS-ET-19	≤ 1500 N to GS-ET-19

This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin gray lines. There are no margins, text, or other markings on the page.

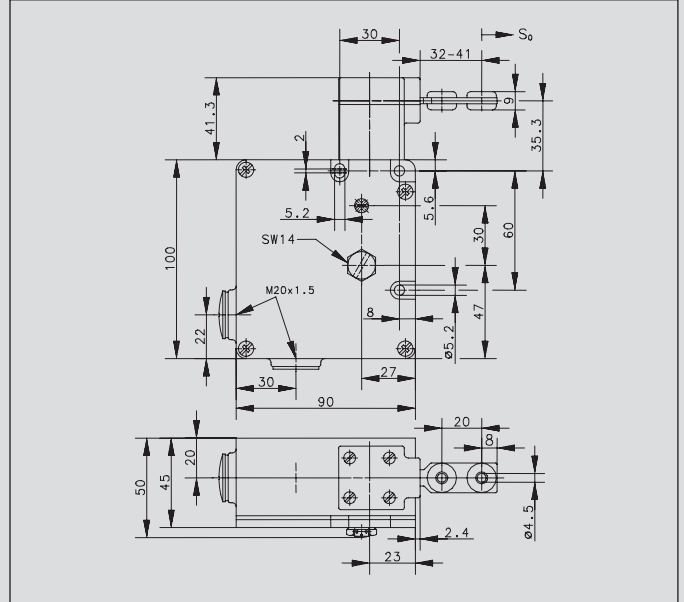
Safety Switches with Separate Actuator and Interlock

SLM




Product advantages

- Highly resistant in harsh industrial environments and with compact enclosure for space-saving installation
- Triple-coded actuator with high anti-tamper security
- Approach direction of actuator easily changed in 90° steps (repositioning only possible with actuator inserted)
- Entire function unit encapsulated on the inside
- Separate connection compartment for safe wiring at contact strip
- Two independent safety circuits ensure reliable integration
 - With two contacts, circuit 1 monitors the actuator
 - With two contacts, circuit 2 monitors the interlock
 - The contact configuration is variable and may deviate from the selection table if required
- Integrated protective circuit avoids polarity reversal and voltage peaks
- Function conforming to VDE 0660 Part 200, EN 60 947-5-1 and GS ET 19
- The SLM safety switches are supplied as standard with actuator A1



Options

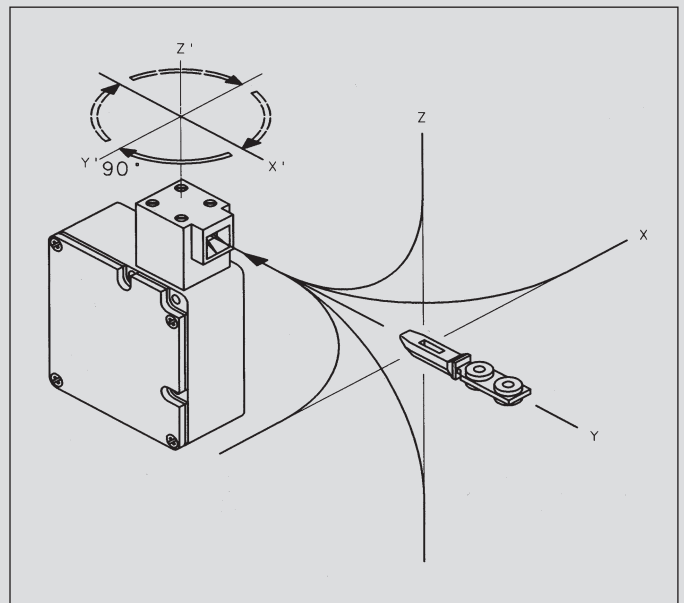- Individual contact configuration
- Radius actuator for actuating radii of less than 400 mm
- Auxiliary release
- Two independent safety circuits ensure reliable integration
- Solutions to customer specifications



Product selection

Article number	Designation	Locking action	Contacts		Supply voltage	Additional function
			Actuator	Interlock		
6017119020	SLM-FVTW 24DC-55-AR	Spring	1NC / 1NO	1NC / 1NO	24 Volt DC	Auxiliary release
6017169067	SLM-FVTW 24DC-22-AR	Spring	2 NC	2 NC	24 Volt DC	Auxiliary release
6017119047	SLM-FVTW 24DC-55-KR	Spring	1NC / 1NO	1NC / 1NO	24 Volt DC	With key release
6117169023	SLM-FVTW 24AC-22-AR	Spring	2 NC	2 NC	24 Volt AC	Auxiliary release
6017119032	SLM-FVTW 120AC-55-AR	Spring	1NC / 1NO	1NC / 1NO	120 Volt AC	Auxiliary release
6017119022	SLM-FVTW 230AC-55-AR	Spring	1NC / 1NO	1NC / 1NO	230 Volt AC	Auxiliary release
6017169066	SLM-MVTW 24DC-22	Magnet	2 NC	2 NC	24 Volt DC	
6017119023	SLM-MVTW 24DC-55	Magnet	1NC / 1NO	1NC / 1NO	24 Volt DC	
6017119024	SLM-MVTW 230AC-55	Magnet	1NC / 1NO	1NC / 1NO	230 Volt AC	


Technical data

	Spring 24 Volt DC	Spring 120 Volt AC	Spring 230 Volt AC	Magnet 24 Volt DC	Magnet 230 Volt AC
Electrical data					
Rated insulation voltage U_i	250 V	250 V	250 V	250 V	250 V
Utilization category	AC-12, U_e / I_e 250 V / 10 A AC-15, U_e / I_e 230 V / 4 A	AC-12, U_e / I_e 250 V / 10 A AC-15, U_e / I_e 230 V / 4 A	AC-12, U_e / I_e 250 V / 10 A AC-15, U_e / I_e 230 V / 4 A	AC-12, U_e / I_e 250 V / 10 A AC-15, U_e / I_e 230 V / 4 A	AC-12, U_e / I_e 250 V / 10 A AC-15, U_e / I_e 230 V / 4 A
Conventional thermal current I_{the}	5 A	5 A	5 A	5 A	5 A
Short-circuit protection	10 A gL/gG	10 A gL/gG	10 A gL/gG	10 A gL/gG	10 A gL/gG
Protection class	I	I	I	I	I
Electromagnet					
Duty factor	100 % ED	100 % ED	100 % ED	100 % ED	100 % ED
Thermal class	B (130 °C)	B (130 °C)	B (130 °C)	B (130 °C)	B (130 °C)
Continuous power	5.2 W	5.2 W	5.2 W	5.2 W	5.2 W
Operating voltage	24 V DC	120 V AC	230 V AC	24 V DC	230 V AC
Mechanical data					
Enclosure	Al die-cast	Al die-cast	Al die-cast	Al die-cast	Al die-cast
Cover	Sheet aluminium	Sheet aluminium	Sheet aluminium	Sheet aluminium	Sheet aluminium
Actuator	ZN die-cast	Al die-cast	Al die-cast	Al die-cast	Al die-cast
Ambient temperature	-30 °C to + 60 °C	-30 °C to + 60 °C	-30 °C to + 60 °C	-30 °C to + 60 °C	-30 °C to + 60 °C
Switching principle	4 Slow-action contacts	4 Slow-action contacts	4 Slow-action contacts	4 Slow-action contacts	4 Slow-action contacts
Mechanical service life	1 x 10 ⁶ switching cycles	1 x 10 ⁶ switching cycles	1 x 10 ⁶ switching cycles	1 x 10 ⁶ switching cycles	1 x 10 ⁶ switching cycles
B10d	2 mill.	2 mill.	2 mill.	2 mill.	2 mill.
Minimum actuating radius R_{min}	400 mm	400 mm	400 mm	400 mm	400 mm
Approach speed V_{max}	1.5 m/s	1.5 m/s	1.5 m/s	1.5 m/s	1.5 m/s
Mounting	3 x M5	3 x M5	3 x M5	3 x M5	3 x M5
Cross sections	0.5 – 1.5 mm ²	0.5 – 1.5 mm ²	0.5 – 1.5 mm ²	0.5 – 1.5 mm ²	0.5 – 1.5 mm ²
Type of connection	Screws	Screws	Screws	Screws	Screws
Cable entry	2 x M20 x 1.5	2 x M20 x 1.5	2 x M20 x 1.5	2 x M20 x 1.5	2 x M20 x 1.5
Weight	≈ 0.81 kg	≈ 0.81 kg	≈ 0.81 kg	≈ 0.81 kg	≈ 0.81 kg
Protection class	IP67 conforming to IEC/EN 60529	IP67 conforming to IEC 529	IP67 conforming to IEC 529	IP67 conforming to IEC 529	IP67 conforming to IEC 529
Installation position	Any	Any	Any	Any	Any
Locking principle	Spring force	Spring force	Spring force latching	Spring force latching	Spring force latching
Latching force	≤ 1000 N to GS-ET 19	≤ 1000 N to GS-ET 19	≤ 1000 N to GS-ET 19	≤ 1000 N to GS-ET 19	≤ 1000 N to GS-ET 19

Safety Switches with Separate Actuator and Interlock


Product selection SLK, SLM, ENK-VTU, ENM2-VTW

Article number	Designation
3911702228	Actuator A1

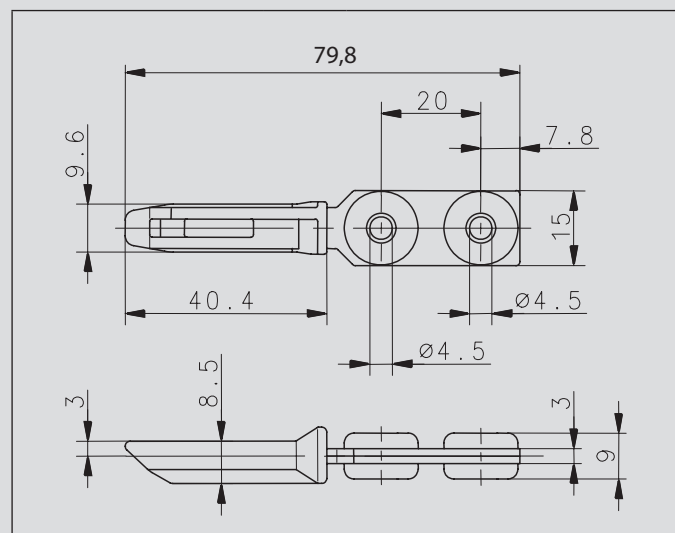


Mechanical data		
Actuator		Steel/PA
Minimum actuating radius	R_{min}	400 mm

Article number	Designation
3911702231	Actuator A4

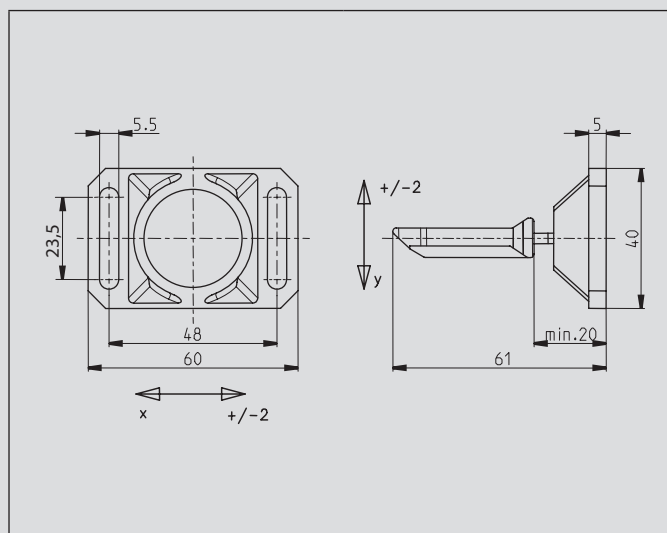


Mechanical data		
Actuator		Steel/PA
Enclosure		GD-Zn
Minimum actuating radius	R_{min}	350 mm
Repositioning of spring-mounted actuator by $4 \times 90^\circ$ in mounted state.		

Article number	Designation
3911702229	Actuator A2

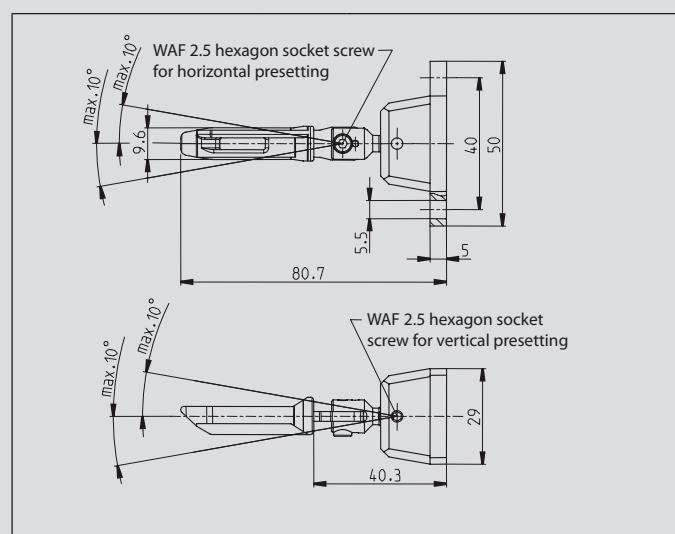


Mechanical data		
Enclosure / Actuator		Steel/PA
Minimum actuating radius	R_{min}	150 mm
Repositioning of spring-mounted actuator by $4 \times 90^\circ$ in not mounted state.		
WAF 2.5 Allen key, supplied		

Article number	Designation
3911702230	Actuator A3

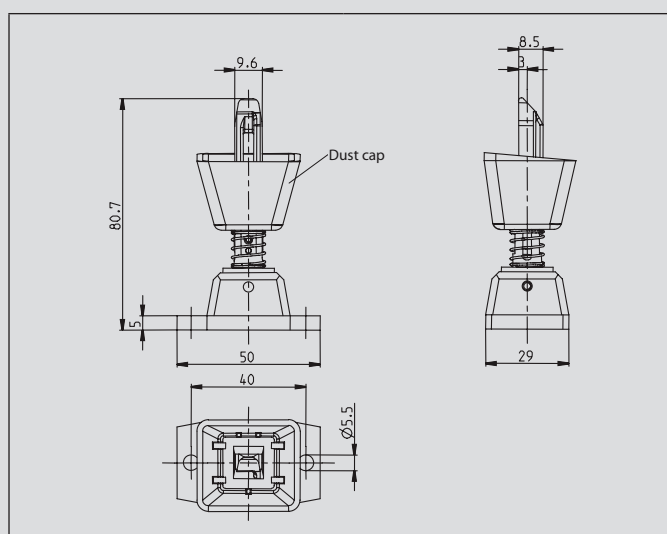

Mechanical data		
Enclosure / Actuator		Steel/PA
Dust cap		Elastomer CR
Minimum actuating radius	R_{min}	400 mm
Repositioning of spring-mounted actuator by $4 \times 90^\circ$ in not mounted state.		

Article number	Designation
3911702234	Actuator A7

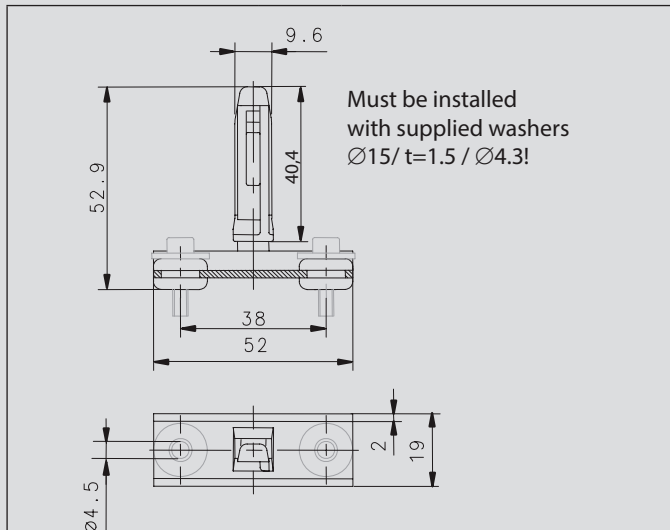

Mechanical data		
Actuator		Steel/PA
U-section		Steel
Minimum actuating radius	R_{min}	400 mm

Safety Hinge Switch – SHS3



- In addition to the plug connection version, an SHS with fixed cable connection at the rear is also available
- Right and left hinged systems possible for optimum cable routing
- Mounting between sections while maintaining the required finger guard gap

Fast:

To connect the SHS3 even more efficiently, the two contacts are designed as normally-closed contacts with Ultra-Lock technology, thus enabling connection with an M12 cable.

Reliable:

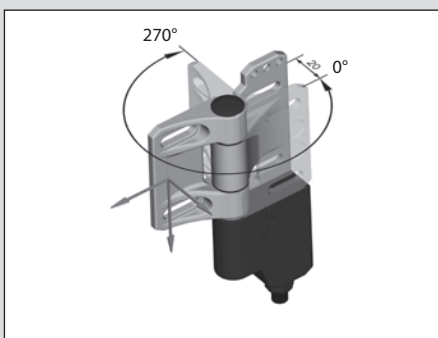
- The protection rating is IP 67 / IP 69 K
- The load-bearing hinge is made from stainless steel while the switching system is housed in a high quality plastic enclosure

Double hinge

Thanks to its two switching elements on one hinge, the BG (occupational health and safety)-approved variant of the SHS3 provides two independently adjustable switching points. This arrangement not only makes it possible to monitor the opening of a safety guard but also the direction of opening of swing doors.

With the SHS3 safety hinge switch we present the logical further development of the SHS series and a solution that makes it unnecessary to replace the safety hinge switch when equipment such as safety gates are damaged as the result of mechanical stress, such as after being bumped by a forklift truck for instance. Even after the switching point has been set, if need be, the user can now correct the hinge setting with the aid of the integrated fine adjustment system. The SHS3 hinge switch is reusable even when the entire system needs to be converted: With the aid of a change kit, the user can redefine the switching point without using the high protection rating of IP 67 / IP 69 K.

The SHS3 has a swivel range from 0° to 270°. The switching point is also freely selectable within this range.



The SHS3 hinge switch has virtually no limits in terms of its installation flexibility. Not only does the SHS3 enable front and interior installation, right-hinged or left-hinged mounting or freely selectable direction of electric connection, but thanks to the switching point which can be set in an angle range of 270°, this hinge switch can also be installed in places that were previously not possible.

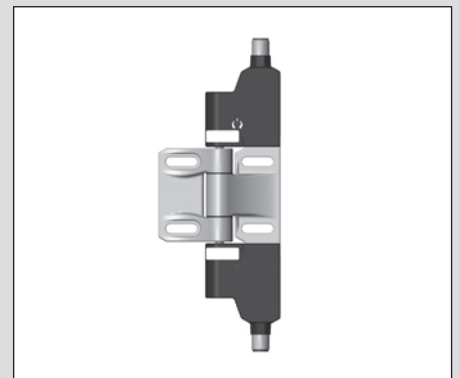
Safe:

With suitable system layout, the switch can be used up to performance level e. Following variants are available:


- 2 positive opening safety contacts
- 2 positive opening safety contacts with additional normally-open signalling contact
- With integrated AS interface Safety at Work.

Flexible:

- Freely and repeatedly adjustable switching point
- Switching point freely adjustable by user over a range of 270°
- Uncomplicated re-adjustment even of set switching point by $\pm 1.5^\circ$ thanks to integrated fine adjustment system
- Slots for mounting on sections and welded structures



SHS3 – Setting the switching point

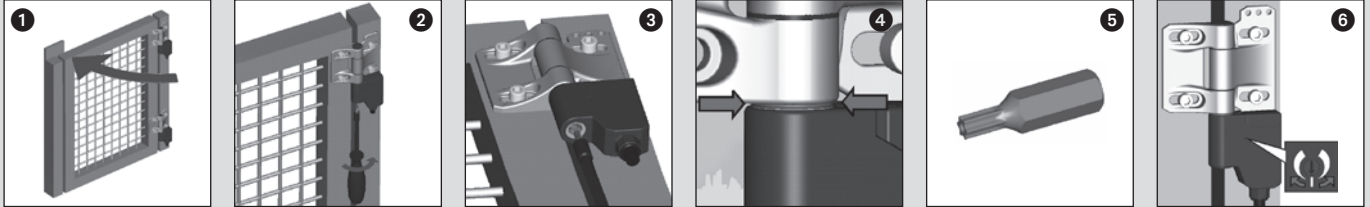

On delivery, the SHS3 hinge switch allows for all possible settings. With your specific application you define and lock the safe status of the hinged safety equipment (the closed position) (Fig. 1).

The adjusting screw located in axial direction in the switching system is then tightened with the special bit supplied with the hinge switch. The arrangement of the adjusting screw makes it possible to adjust the switching point in all installation positions (Fig. 2+3)

After establishing a form-fit connection, a green ring in the gap between the stainless steel hinge and switch enclosure indicates that the switching point has been set correctly at a min. torque of 2 Nm/+10% (Fig. 4).

A red ring at this point additionally indicates wear, e.g. caused by abrasive substances. With the same special bit you can not only freely adjust the switching point to suit your application but you can also change the mounting arrangement of your safety equipment from right-hinged to left-hinged (Fig. 5).



Fine adjustment

The set switching point can be subsequently varied by up to $\pm 1.5\%$ by turning the adjusting screw in the corresponding direction (Fig. 6).

In many cases this fine adjustment makes it unnecessary to replace the switch or readjust the switching point due to mechanical deformation of the safety guard. The switching angle should generally be selected as small as possible.



Dimensioned drawings

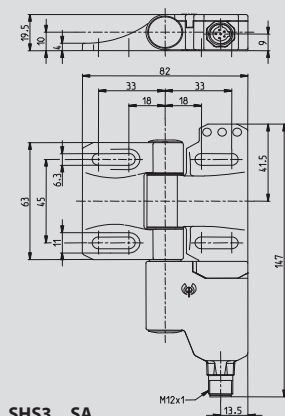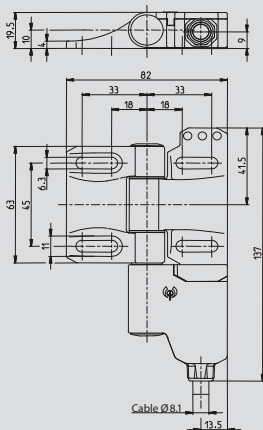SHS3...KA...



SHS3...SA...

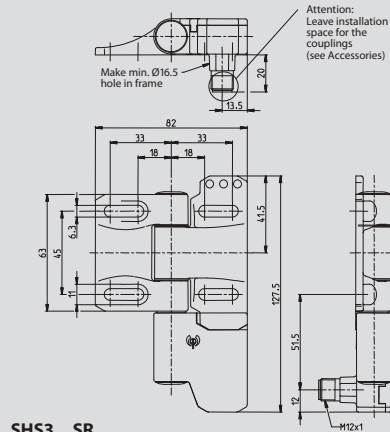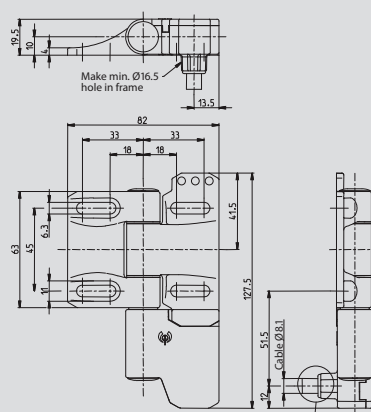SHS3...KR...




SHS3...SR...

Switching diagram


U15Z

2 NC contacts,
1 NO contacts (Zb)



A2Z

2 NC contacts (Zb)



Setting point freely selectable in range from 0°... 270° and 0°... 180°

Tolerances:

Switching angle (opening) $\pm 1.5^\circ$
Positive opening torque 10 %
Positive opening angle $\pm 1.5^\circ$

Safety Switches for Hinged Protective Equipment

Product selection for die-cast zinc version

Article number	Designation	Switching contact	Max. switching voltage	Type of voltage	Type of connection and direction		Required cable coupling / type	Mounting
					radial	axial		
6019490050	SHS3Z-U15Z-KA5 R	2NC/1NO	230 V	AC/DC		Cable		Right
6019490051	SHS3Z-U15Z-KA5 L	2NC/1NO	230 V	AC/DC		Cable		Left
6019490052	SHS3Z-U15Z-KR5 R	2NC/1NO	230 V	AC/DC	Cable			Right
6019490053	SHS3Z-U15Z-KR5 L	2NC/1NO	230 V	AC/DC	Cable			Left
6019490054	SHS3Z-U15Z-SA R	2NC/1NO	230 V	AC/DC		M12	D	Right
6019490055	SHS3Z-U15Z-SA L	2NC/1NO	230 V	AC/DC		M12	D	Left
6019490056	SHS3Z-U15Z-SR R	2NC/1NO	230 V	AC/DC	M12		D	Right
6019490063	SHS3Z-U15Z-SR L	2NC/1NO	230 V	AC/DC	M12		D	Left
6019490057	SHS3Z-U1Z-SA R	1NC/1NO	230 V	AC/DC		M12	E	Right
6019490058	SHS3Z-U1Z-SA L	1NC/1NO	230 V	AC/DC		M12	E	Left
6019490059	SHS3Z-U1Z-SR R	1NC/1NO	230 V	AC/DC	M12		E	Right
6019490060	SHS3Z-A2Z-SA R	2NC	230 V	AC/DC		M12	E	Right
6019490061	SHS3Z-A2Z-SA L	2NC	230 V	AC/DC		M12	E	Left
6019490062	SHS3Z-A2Z-SR R	2NC	230 V	AC/DC	M12		E	Right
6019490049	SHS3Z-HINGE							

Product selection for stainless steel version

Article number	Designation	Switching contact	Max. switching voltage	Type of voltage	Type of connection and direction		Required cable coupling / type	Mounting
					radial	axial		
6019390023	SHS3-U15Z-KA 5 L	2NC/1NO	230 V	AC/DC		Cable		Left
6019390022	SHS3-U15Z-KA 5 R	2NC/1NO	230 V	AC/DC		Cable		Right
6019390025	SHS3-U15Z-KR 5 L	2NC/1NO	230 V	AC/DC	Cable			Left
6019390024	SHS3-U15Z-KR 5 R	2NC/1NO	230 V	AC/DC	Cable			Right
6019390035	SHS3-U15Z-SA L	2NC/1NO	230 V	AC/DC		M12	D	Left
6019390034	SHS3-U15Z-SA R	2NC/1NO	230 V	AC/DC		M12	D	Right
6019390037	SHS3-U15Z-SR L	2NC/1NO	230 V	AC/DC	M12		D	Left
6019390036	SHS3-U15Z-SR R	2NC/1NO	230 V	AC/DC	M12		D	Right
6019390040	SHS3-A2Z-SA-R	2NC	230 V	AC/DC		M12	E	Right
6019390041	SHS3-A2Z-SA-L	2NC	230 V	AC/DC		M12	E	Left
6019390044	SHS3-A2Z-SR-R	2NC	230 V	AC/DC	M12		E	Right
6019390042	SHS3-U1Z-SA-R	1NC/1NO	230 V	AC/DC		M12	E	Right
6019390043	SHS3-U1Z-SA-L	1NC/1NO	230 V	AC/DC		M12	E	Left
6019390045	SHS3-U1Z-SR-R	1NC/1NO	230 V	AC/DC	M12		E	Right
6019390046	SHS3-2-SA/2-SA	2 x 2NC	230 V	AC/DC		M12	2 x E	Both sides
6019390047	SHS3-5-SA/5-SA	2 x 1NC/1NO	230 V	AC/DC		M12	2 x E	Both sides
6019390048	SHS3-7-KA5/7-KA5	2 x 1NC/1NO	230 V	AC/DC		Cable		Both sides
6019390039	SHS3-7-SA/7-SA	2 x 1NC/1NO	230 V	AC/DC		M12	2 x D	Both sides
6019390038	SHS3-HINGE (blank hinge)							Both sides

Product selection for stainless steel version in IP 69K

Article number	Designation	Switching contact	Max. switching voltage	Type of voltage	Type of connection and direction		Required cable coupling / type	Mounting
					radial	axial		
6019390064	SHS3-U15Z-KA5-R-IPX	2NC/1NO	230 V	AC/DC		Cable		Right
6019390065	SHS3-U15Z-KA5-L-IPX	2NC/1NO	230 V	AC/DC		Cable		Left
6019390066	SHS3-U15Z-KA5-R-IPX	2NC/1NO	230 V	AC/DC	Cable			Right
6019390067	SHS3-U15Z-KA5-L-IPX	2NC/1NO	230 V	AC/DC	Cable			Left
6019390068	SHS3-7-KA5-IPX/7-KA5-IPX	2 x 1NC/1NO	230 V	AC/DC		Cable		Both sides

Technical data SHS3



Electrical data		
Rated insulation voltage	U _i max.	250 V
Rated operating voltage	U _e max.	230 V AC; 24 V DC
Conventional thermal current	I _{the}	5 A
Utilization category	U _e /I _e	AC-15, U _e /I _e 230 V / 3 A; DC-13 U _e /I _e 24 V/1A
Short-circuit protection		4 A gL/gG
Protection class		II, Insulated
Mechanical data		
Switch	PBT / Hinge G-X22 Cr Ni 17	
Ambient temperature	-25°C to + 70°C (Connection cable installed)	
Mechanical service life	10 ⁶ switching cycles	
Switching frequency max.	max. 300 switching cycles/hour	
Mounting	4 x M6 Screws DIN EN ISO 7984	
B10d	2 mill.	
Type of connection	Fixed connection cable, 6 x 0.75 mm ² , minimum bending radius = 60 mm	
Weight	approx. 0.7 kg (cable variant)	
Installation position	Any	
Protection class	IP 67 conforming to IEC/EN 60529	
Switching angle	± 3° from setting point	
Positive opening angle	± 6° + 2	
Positive opening torque	1.5 Nm	
Mechanical load	F _{R1} = max. 1200 N, F _{R2} = max. 500 N, F _A = max. 1200 N	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1		
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

Safety Switches for Hinged Protective Equipment

SHS3 Cable Type D

Article number	Designation	Cable length	Connector type	Number of pins	Special feature
3251006291	AN-KAB.SH53 2M STRAIGHT	2 m	Straight	6	M12 BG version
3251006292	AN-KAB.SH53 5M STRAIGHT	5 m	Straight	6	M12 BG version
3251006293	AN-KAB.SH53 10M STRAIGHT	10 m	Straight	6	M12 BG version
3251006294	AN-KAB.SH53 2M ELBOW	2 m	Elbow	6	M12 BG version
3251006295	AN-KAB.SH53 5M ELBOW	5 m	Elbow	6	M12 BG version
3251006296	AN-KAB.SH53 10M ELBOW	10 m	Elbow	6	M12 BG version

Contact assignments, AC/DC versions




1 = White
2 = Brown
3 = Green
4 = Yellow
5 = Grey
6 = Pink

Core insulation/sheathing material:	PVC (Ø 5.6 mm)
Moulding/contact carrier material:	PUR Elastollan R3000
Max. rated voltage:	250 V AC
Max. current carrying capacity:	2.5 A (at 70 °C)
Min./max. temperature range:	-5 °C to + 105 °C (moved) -40 °C to + 105 °C (moved firmly)
Cable configuration mm ² :	LiYwUL2517 6 x 0.34
Protection class when assembled:	IP 68

SHS3 Cable Type E

Article number	Designation	Cable length	Connector type	Number of pins	Special feature
3251004310	AN-KAB.SH53 4P 2M STRAIGHT	2 m	Straight	4	M12 BG version
3251004311	AN-KAB.SH53 4P 5M STRAIGHT	5 m	Straight	4	M12 BG version
3251004312	AN-KAB.SH53 4P 10M STRAIGHT	10 m	Straight	4	M12 BG version
3251004313	AN-KAB.SH53 4P 2M ELBOW	2 m	Elbow	4	M12 BG version
3251004314	AN-KAB.SH53 4P 5M ELBOW	5 m	Elbow	4	M12 BG version
3251004315	AN-KAB.SH53 4P 10M ELBOW	10 m	Elbow	4	M12 BG version
3251004316	AN-KAB.SH53 4P U.L. 2M STRAIGHT	2 m	Straight	4	Ultra Lock BG version
3251004317	AN-KAB.SH53 4P U.L. 5M STRAIGHT	5 m	Straight	4	Ultra Lock BG version
3251004318	AN-KAB.SH53 4P U.L. 10M STRAIGHT	10 m	Straight	4	Ultra Lock BG version
3251004319	AN-KAB.SH53 4P U.L. 2M ELBOW	2 m	Elbow	4	Ultra Lock BG version
3251004320	AN-KAB.SH53 4P U.L. 5M ELBOW	5 m	Elbow	4	Ultra Lock BG version
3251004321	AN-KAB.SH53 4P U.L. 10M ELBOW	10 m	Elbow	4	Ultra Lock BG version

Contact assignments, AC/DC versions



1 = Brown
2 = White
3 = Blue
4 = Black

Core insulation / sheathing material:	Heat resistant PVC UL 1731 / UL 2517 black
Moulding/contact carrier material:	APEX 7500-85 / R3000 Elastollan R3000 neutral
Max. rated voltage:	250 V
Max. current carrying capacity:	4 A
Min. / max. temperature range:	At rest -25 °C to + 105 °C Moved -5 °C to + 105 °C
Protection class when assembled:	IP 68

Change kit for re-adjusting switching point



Article number	Designation
3991990161	SHS3 change kit
Containing:	
2 replacement caps	
1 special bit	
1 plastic ring	

Installation tool



Article number	Designation
1910000005	Bit holder 1/4" flexible stem

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light gray lines. There are no margins, text, or other markings on the page.

Safety Switches for Hinged Protective Equipment

Safety Hinge Switch – SHS

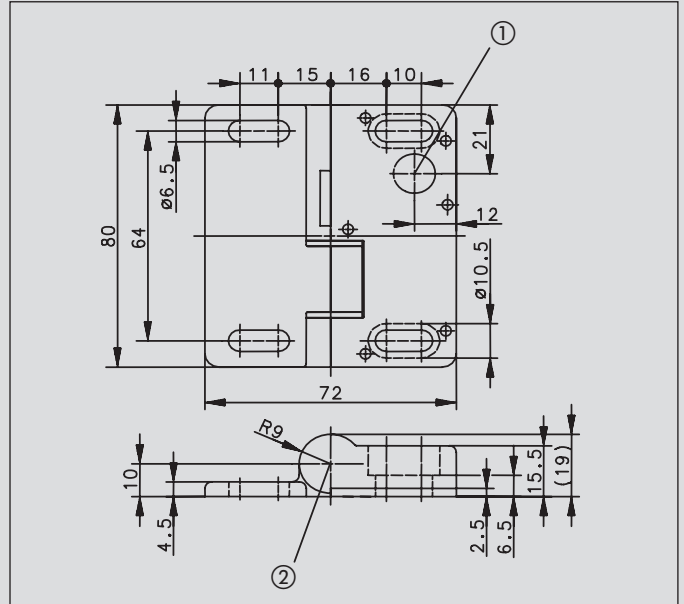


Illustration showing fixed pin and shearing bolt sheared off

- ① Position of connection variant 2, 5 and 6.
- ② Position of connection variant 1, 3 and 4.

Protective hoods and safety guards on machines such as gates in safety gate systems are often pivot mounted with hinges.

Since BERNSTEIN presented the world's first safety hinge switch SHS in 2002 it is hard to imagine modern production installations without it. It combines a hinge and safety switch in one single functional unit.

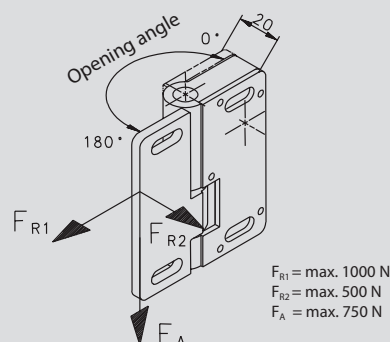
The design of the SHS safety hinge switch has been optimised to allow its effective use on aluminium section systems. Its shallow depth, even when fully opened, makes it ideally suited for use in constricted installation conditions on machines. Safety switches with separate actuators are often subjected to high mechanical stresses, especially when they are mounted on closing edges. The SHS hinge switch sets new standards. The safety guard is monitored directly in the hinge.

The concealed arrangement of the safety switch provides a high degree of protection against tampering. One or several SHS switches can be used depending on control requirements.

In many applications the conventional load bearing hinge can be replaced by a blank hinge with identical design features as the safety hinge. This has significant rationalisation benefits. The only parameter you need to take into account is the maximum extension of the hinged safety equipment that results from the switching angle and the permissible safe opening in the area of the closing edges. The SHS hinge switch provides maximum anti-tamper protection as, once set, the switching point can no longer be changed.

Safe:

- 2 SHS hinge switches, each equipped with a positively opening safety contact, allows you to configure a system up to performance level e



$F_{R1} = \text{max. } 1000 \text{ N}$
 $F_{R2} = \text{max. } 500 \text{ N}$
 $F_A = \text{max. } 750 \text{ N}$

Flexible:

- The angle range extends from 0 to 225°
- A safety device ensures positive locking after the switch has been set
- In addition to the plug connection version, an SHS with fixed cable connection at the rear is also available

Fast:


- Plug connector and fixed cable connections are available for axial and radial (rear) connection
- An AC/DC version (up to 250 V) or a DC version (up to 60 V) is available, depending on the configuration of the safety circuit

Reliable:


- A pressure die-cast zinc enclosure allows versatile use of the SHS switch in varied applications
- When used as a load bearing hinge, the SHS takes up loads of up to 750 N in axial direction and 1000 N in radial direction after the switching point has been finally set
- The protection rating is IP 67

Switching diagram

1 NC contact
(Type B)



1 Changeover
contact
(Type C)



Setting point freely selectable
in range from 0°... 225°

Tolerances:


Switching angle (opening) +2.0°/-1.5°

Positive opening torque 10 %


Positive opening angle +0.5°/-3°

Switching angle hysteresis (closing of normally-closed contact -1.0°)
from typical hinge switch-off point

Connection drawing




Connection variant 1




Cable, PVC

Connection variant 2




Cable, PVC

Connection variant 3




Connector M12 x 1,
metal thread

Connection variant 4




Connector M12 x 1,
metal thread with
anti-tamper facility

Connection variant 5



Connector M12 x 1

Connection variant 6



Connector M12 x 1

Product selection

Article number	Designation	Switching contact	Max. switch- ing voltage	Type of voltage	Connection variant			Required cable coupling / type	Remarks
					radial	number	axial		
6019261011	SHS-A1Z-KA 5	1NC	230 V	AC/DC		1	Cable		BG approval
6019261014	SHS-A1Z-KR 5	1NC	230 V	AC/DC	Cable	2			BG approval
6019261017	SHS-A1Z-SA-BG	1NC	230 V	AC/DC		4	M12	A	BG approval
6019261018	SHS-A1Z-SR-BG	1NC	230 V	AC/DC	M12	6		A	BG approval
6019261009	SHS-A1Z-SA	1 Changeover contact	230 V	AC/DC		3	M12	C	
6019261010	SHS-A1Z-SR	1 Changeover contact	60 V	DC	M12	5		B	
6019261015	SHS-A1Z-SA	1 Changeover contact	60 V	DC		3	M12	B	
6019261016	SHS-A1Z-SR	1 Changeover contact	230 V	AC/DC	M12	6		C	
6019291013	SHS-OZ								Blank hinge

Technical data

Electrical data		
Rated insulation voltage	U _i	250 V
Rated surge voltage strength	U _{imp}	2.5 kV
Thermal current	I _{the}	3 A
Rated operating voltage	U _e	230 V AC; 60 V DC
Utilization category		AC-15, 230 V AC/1.5 A;
Positive opening	↻	conforming to IEC/EN 60947-5-1, Addendum K
Short-circuit protection		Fuse 4 A gL/gG
Mechanical data		
Switch	GD-Zn	
Ambient temperature	-25°C to + 70°C (Connection cable installed)	
Mechanical service life	10 ⁶ switching cycles	
B10d	2 mill.	
Switching frequency	max. 1200 switching cycles/hour	
Mounting	4x M6 screws DIN 7984 or DIN 6912	
Type of connection	Fixed connection cable, 3 x 0.5 mm ² x 5 m (AWG20), minimum bending radius = 25 mm	
Weight	approx. 0.7 kg (cable variant) approx. 0.4 kg (connector and blank hinge variant)	
Installation position	Any	
Protection class	IP 67 as per IEC/EN 60529	
Switching angle	± 3° from setting point	
Positive opening angle	± 10° from setting point	
Positive opening torque	1.5 Nm	
Mechanical load	F _{R1} = max. 1000 N, F _{R2} = max. 500 N, F _A = max. 750 N	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		


Safety Switches for Hinged Protective Equipment

SHS Cable Type A

Article number	Designation	Cable length	Connector type	Number of pins	Special feature
3251103234	AN-KAB.SH5 5M AC STRAIGHT	5 m	Straight	3	AC/DC BG version
3251103236	AN-KAB.SH5 5M AC ELBOW	5 m	Elbow	3	AC/DC BG version

Contact assignments, AC/DC versions

- 1 = Green/yellow
2 = Black
3 = Blue




Core insulation / sheathing material:	PVC (UL)/PVC (UL)
Moulding / contact carrier material:	PUR (UL)/PUR (UL)
Max. rated voltage:	300 V AC
Max. current carrying capacity:	3 A
Min. / max. temperature range:	-25 °C / +70 °C
	-13 °F / +158 °F
Cable configuration mm ² :	3 x 0.5
Protection class when assembled:	IP 67

SHS Cable Type B

Article number	Designation	Cable length	Connector type	Number of pins	Special feature
3251003221	AN-KAB.SH5 2M DC STRAIGHT	2 m	Straight	3	DC approval
3251003222	AN-KAB.SH5 5M DC STRAIGHT	5 m	Straight	3	DC approval
3251003223	AN-KAB.SH5 10M DC STRAIGHT	10 m	Straight	3	DC approval
3251003224	AN-KAB.SH5 2M DC ELBOW	2 m	Elbow	3	DC approval
3251003225	AN-KAB.SH5 5M DC ELBOW	5 m	Elbow	3	DC approval
3251003226	AN-KAB.SH5 10M DC ELBOW	10 m	Elbow	3	DC approval

Contact assignments, DC versions

- 1 = Brown
2 = –
3 = Blue
4 = Black




Core insulation / sheathing material:	PVC/PVC
Moulding / contact carrier material:	PUR/PUR
Max. rated voltage:	60 V AC/75 V DC
Max. current carrying capacity:	1.5 A
Min. / max. temperature range:	-25 °C / +70 °C
	-13 °F / +158 °F
Cable configuration mm ² :	3 x 0.34
Protection class when assembled:	IP 67

SHS Cable Type C

Article number	Designation	Cable length	Connector type	Number of pins	Special feature
3251004219	AN-KAB.SH5 5M AC STRAIGHT	5 m	Straight	4	AC/DC-approval
3251004220	AN-KAB.SH5 5M AC ELBOW	5 m	Elbow	4	AC/DC-approval

Contact assignments, AC/DC versions

- 1 = Brown
2 = Black
3 = Blue
4 = Green/yellow



Core insulation / sheathing material:	PVC/PVC
Moulding / contact carrier material:	PUR/Nylon 6.6
Max. rated voltage:	300 V AC
Max. current carrying capacity:	4.0 A
Min. / max. temperature range:	-5 °C / +70 °C
	-13 °F / +158 °F
Cable configuration mm ² :	4 x 0.34
Protection class when assembled:	IP 68

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light gray lines. There are no margins, text, or other markings on the page.

Safety Switches for Hinged Protective Equipment

I88 VKS, -VKW, -AHDB; GC VKS, -VKW; Ti2 AHDB



I88-AHDB



I88-VKW

Safety switches for hinged protective equipment

These switches are suitable for applications where SHS switches cannot be used. They are used for safety monitoring of safety gates, safety guards and protective equipment. Two different types of actuator are available for this type of safety switch. The actuators also differ in terms of their attachment to the safety guards.

The AHDB actuator is available in the Ti2 and I88 families. The switch is attached in such a way that a spindle on the safety guard or on the hinge can enter the hole in the safety switch. The safety contact is opened by turning the spindle when opening the safety guard. The switch can be actuated in both directions without a limit stop.

The VKS and VKW actuators are part of the I88 and GC families. The switch is mounted next to the safety guard. The lever fixture is mounted on the safety guard and opens the safety contact as it moves. The integrated longitudinal guide compensates for different pivot radii.

Two different actuator functions are available to facilitate use in varied applications:

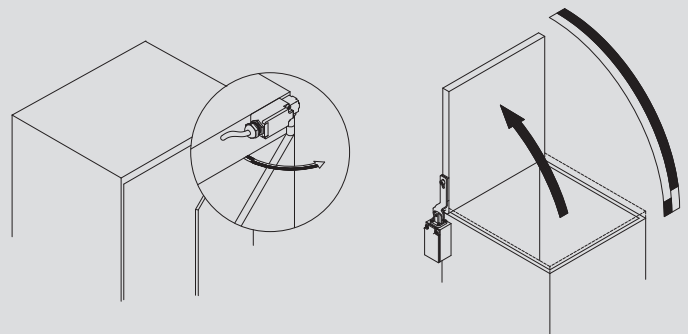
- **VKS with vertical setting**

The safety contact is opened when the lever fixture is moved out of its vertical setting in one of the two possible pivot directions.

- **VKW with horizontal setting**

The safety contact is opened as the lever fixture moves out of its horizontal setting. A distinction is made between VKW RE (right) and VKW LI (left) in connection with I88 switches. This designation makes it possible to identify whether the switch can be mounted on the right-hand or left-hand side of the safety guard. The GC family only contains switches for mounting on the left-hand side.

Both variants allow maximum pivot movements of 180°.






GC-VKS

Technical data		Ti2 AHDB	I88 AHDB	I88	GC
Electrical data					
Rated insulation voltage	U_i	250 V AC	250 V AC	250 V AC	400 V AC
Conventional thermal current	I_{the} U1Z A2Z	10 A –	10 A 5 A	10 A 5 A	10 A 5 A
Rated operating voltage	U_e	240 V	240 V	240 V	240 V
Utilization category	U1Z A2Z	AC15, 240 V/3 A, –	AC-15, U_e/I_e 240 V / 3 A AC-15, U_e/I_e 240 V / 1.5 A	AC-15, U_e/I_e 240 V / 3 A AC-15, U_e/I_e 240 V / 1.5 A	AC-15, U_e/I_e 240 V / 3 A –
Positive opening action NC contacts	⊕	As per IEC/EN 60947-5-1, Addendum K	As per IEC/EN 60947-5-1, Addendum K	As per IEC/EN 60947-5-1, Addendum K	As per IEC/EN 60947-5-1, Addendum K
Short-circuit protection		Fuse 6A gL/gG	Fuse 10A gL/gG	Fuse 10A gL/gG	Fuse 10A gL/gG
Protection class		II, Insulated	II, Insulated	II, Insulated	I
Mechanical data					
Enclosure		PBT, glass fibre-reinforced	Thermoplastic, glass fibre-reinforced (UL 94-V0)	Thermoplastic, glass fibre-reinforced (UL 94-V0)	Aluminium pressure die-casting
Cover		PA6.6, black	Thermoplastic, glass fibre-reinforced (UL 94-V0)	Thermoplastic, glass fibre-reinforced (UL 94-V0)	Sheet aluminium
Actuation		Axis lever enclosure, lever (metal)	Axis lever enclosure, lever (metal)	Lever (metal)	Lever (steel)
Ambient temperature		–30°C to + 80°C	–30°C to + 80°C	–30°C to + 80°C	–30°C to + 80°C
Mechanical service life B10d		1 x 10 ⁶ switching cycles 2 mill.	1 x 10 ⁶ switching cycles 2 mill.	1 x 10 ⁶ switching cycles 2 mill.	1 x 10 ⁶ switching cycles 2 mill.
Switching frequency		≤ 50 / min.	≤ 50 / min.	≤ 50 / min.	≤ 20 / min.
Mounting		2 x M4 or 2 x M5 fixed positioning for safety applications	2 x M4	2 x M4	2 x M4
Type of connection		Screw connections	Screw connections	Screw connections	Screw connections
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5
Cable entry		1 x M20 x 1,5	1 x M20 x 1,5	1 x M20 x 1,5	1 x M20 x 1,5
Installation position		Any	Any	Any	Any
Protection class		IP 65 as per EN 60529	IP 65 as per EN 60529	IP 65 as per EN 60529	IP 65 as per EN 60529
Standards					
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1					


① Depending on switching system. See Table on Pages 70 – 73.

Safety Switches for Hinged Protective Equipment

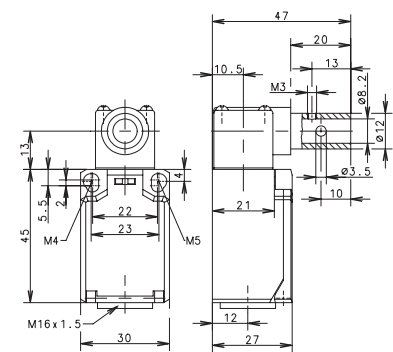Ti2 AHDB



I88 AHDB

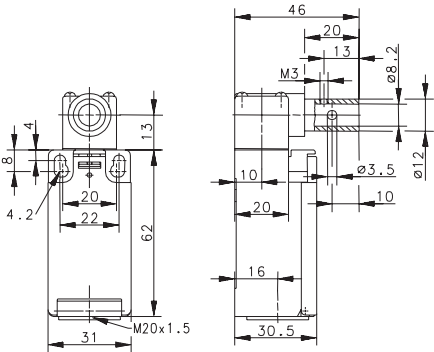


Switching operation

1 NC / 1 NO contact

Slow-action

Snap-action


6188100030
Ti2-U1Z AHDB



Slow-action


Snap-action

6186100267
I88-U1Z AHDB



2 NC contact

6186800324
I88-A2Z AHDB



2 NO contacts

1 NC / 1 NO contact
Overlapping

Approvals



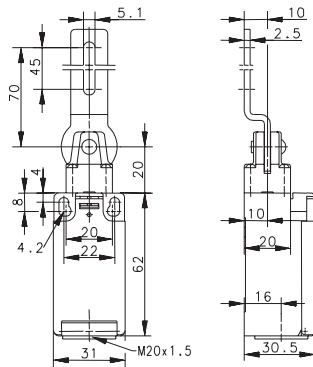
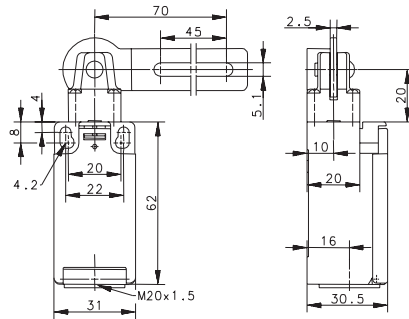
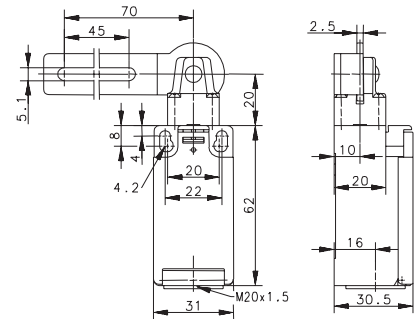
Replacement actuator: –

Replacement actuator: –


Special features / variants
(on request)

Special features / variants
(on request)


- Available in different actuation directions

I88 VKS

I88 VKW RE

I88 VKW LI

Slow-action
Snap-action


6086100093
I88-U1Z VKS




6186800447
I88-A2Z VKS


Slow-action
Snap-action

6086100094
I88-U1Z VKW RE


Slow-action
Snap-action

6086100095
I88-U1Z VKW LI



Replacement actuator: –

Special features / variants
(on request)



Replacement actuator: –

Special features / variants
(on request)



Replacement actuator: –

Special features / variants
(on request)

Safety Switches for Hinged Protective Equipment

	GCVKS	GC VKW
Switching operation	Slow-action	Snap-action
1 NC / 1 NO contact	6121100622 GC-U1Z VKS	6121100623 GC-U1Z VKW
2 NC contact		6121800835 GC-A2Z VKW
2 NO contacts		
1 NC / 1 NO contact Overlapping		
Approvals		

Replacement actuator: 3912001277

Replacement actuator: 3912001278

Special features / variants
(on request)

Special features / variants
(on request)

This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin gray lines. There are no margins, text, or other markings on the page.

Contactless safety technology

To complement the extensive range of mechanical safety switches offered by BERNSTEIN, a new series of contactless safety switches is now available. These safety sensors ensure that safety doors and protective guards remain closed when danger is present.

The contactless safety technology offers the following advantages:

- Wear-free actuating
- Very easy to clean
- No actuator, therefore:
 - No mechanical damage possible
 - No hazards or restrictions caused by protruding actuator
- Switching function not affected by contaminants

BERNSTEIN offers two different technologies in the field of contactless safety technology:

- Safety sensors on magnetic basis, MAK series
- Safety sensors on RFID basis, CSMS series

Safety sensors CSMS

The CSMS can directly be connected to contactors or to an evaluation unit (dependent on the respective model). The RRS version integrates an evaluation of a return circuit and start button with direct connection to contactors. With the CSMS, PL e and SIL 3 is achieved. This is the case with only one CSMS and also with series circuits with up to 32 sensors the case.



Product features

- Performance Level e
- Up to 32 series circuits without leaving the PL e
- Power supply 24 V DC
- High coding level corresponding to the draft DIN EN ISO 14119
- No need of any additional external monitoring (dep. on the type)
- Connection of return circuit and start button possible (dep. on the type)
- Output current up to 250 mA per safety output
- Large diagnostic possibility
- 3 LEDs for status information of the CSMS
- Switching distance: 13 mm
- Dimensions: 110 mm x 30 mm x 15 mm
- IP 67

Safety sensors MAK

To achieve a PL or SIL value with the MAK safety sensors, it is necessary to connect them to a safety evaluation unit. The magnetic safety sensors are dual channel versions. The evaluation unit (BERNSTEIN designation: MÜZ) monitors the correct switching of the two MAK channels and a defined time window in which the two channels must switch.

With the combination of MAK and MÜZ, a PL D and a SIL 3 can be reached. Besides the 3 different types of magnetic safety switches, BERNSTEIN also offers two different evaluation units.



Product features

- Performance Level d
- Redundancy with NO and NC contacts
- Switching distance: 6 mm
- IP 67

Comparison CSMS – MAK

Product characteristics	CSMS	MAK
Operating principle	elektro-magnetic, RFID	magnetic, Reed
Safety parameters	PL e, SIL3	PL d, SIL 3
Safety outputs	electrical outputs	mechanical contacts
Can be switched in series	yes, when a constant safety level is guaranteed	yes, with falling safety level
Evaluation unit required	no	yes
Actuator coding	high	low
Sensing distance	13 mm	3–4 mm
Diagnostic interface	via LED and electronically	no
Mechanical sensitivity	low	very high
Approach possibility of the actuator	4	1
Safety outputs	2	1
Return circuit evaluation	yes	partially (depending on the evaluation unit)
Start button monitoring	yes	partially (depending on the evaluation unit)

The **CSMS** is a future-proofed safety product. The CSMS is a contactless safety sensor that uses RFID technology. It can be used as a single device as well as being connected in series up to PL e and SIL 3. BERNSTEIN offers two general product versions.

● CSMS-...-RRS... ❶

With this product version, safety sensors can be connected to contactors without using an evaluation device. The product has an integrated evaluation of the return circuit and allows connection of a start button.

● CSMS-...-R... ❷

This product version can be connected to a safety evaluation unit. Optionally, another safety sensor can be connected to the first CSMS with OSSD output (e.g. light curtains).

Both versions have extensive diagnostic capabilities. This is transmitted over a communication channel to a diagnostic device. This is displayed via PNP outputs if the CSMS is opened or closed. Moreover, it is possible to obtain information about the system and the sensor via integrated LEDs.

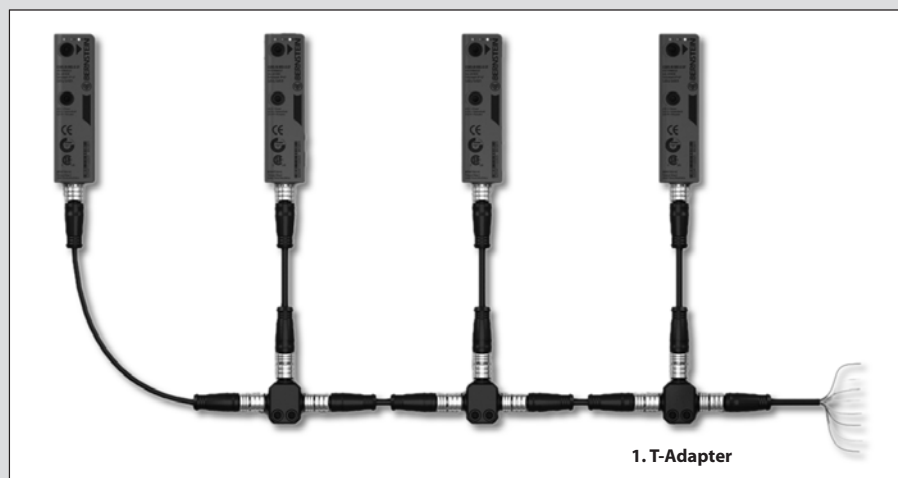
In order to ensure a particularly high manipulation protection (according to draft DIN EN ISO 14119), each sensor is assigned to one actuator. Thus, it is ensured that the CSMS cannot be "tricked" with different actuators.

The fast and accurate connection of the CSMS is realised by M12 connector cables and T-pieces.

● CSMS-...-A... ❸

This product version allows a direct connection of several safety sensors to the safety controller by parallel wiring.

Connection example




T-Adapters to be used


Versions	Start function	1. T-Adapter	Following T-Adapter
Version RRS	Manual start Automatic start	Grey Black	Black Black
Version R		Grey	Black

Application examples

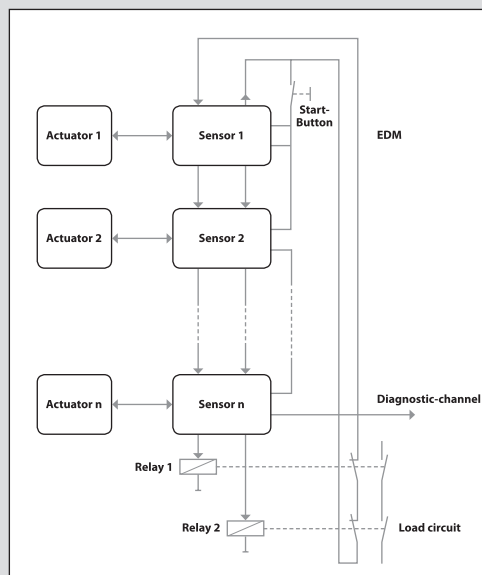
❶ CSMS Series circuits without additional evaluation



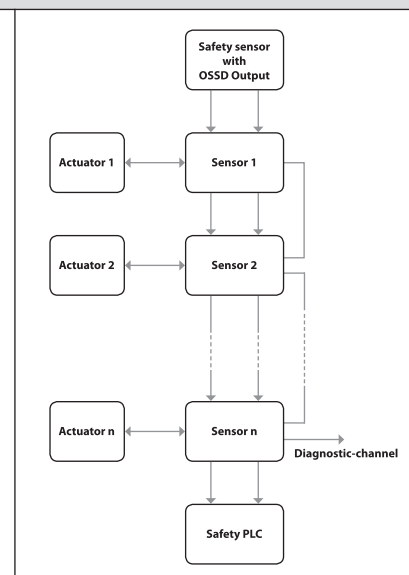
❷ CSMS Series circuits with evaluation device



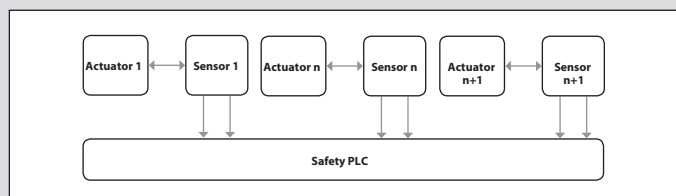❸ CSMS Parallel connection to a safety controller



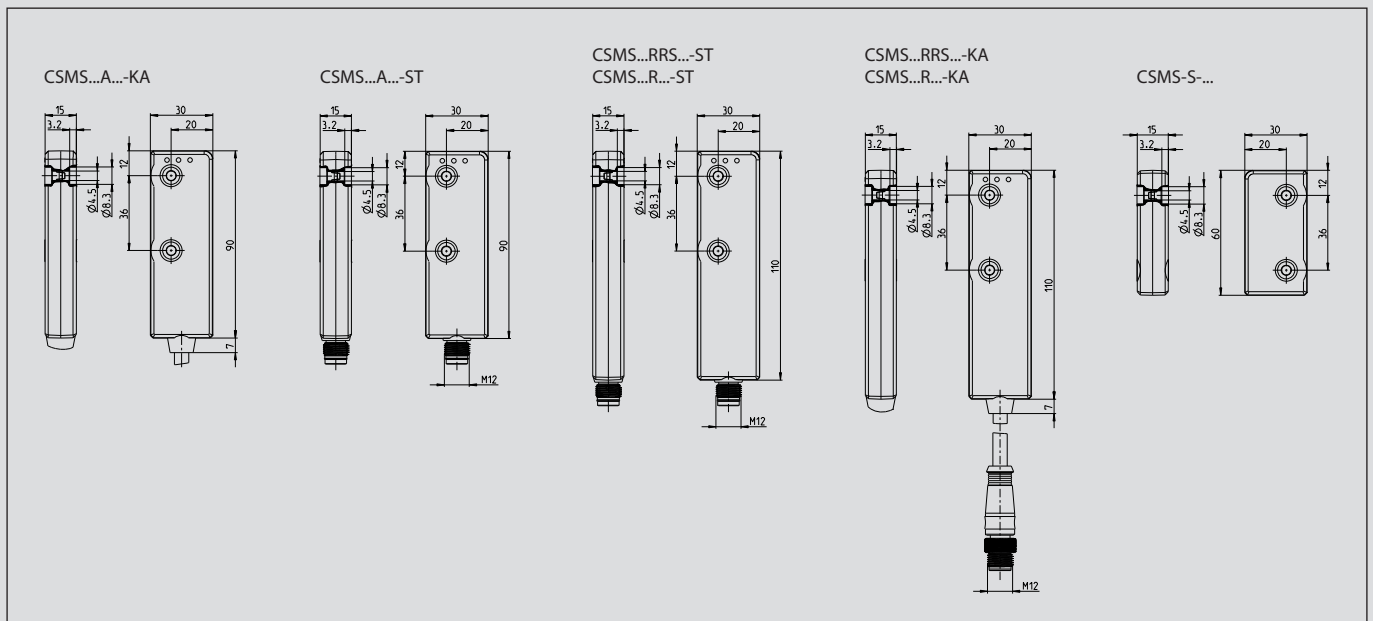CSMS Contactless Safety Monitoring Sensor



According to **ISO 14119**, interlocking devices are mechanical or electrical devices which are designed to prevent the operation of a machine element for as long as the movable safety guard is left open.

The CSMS based on RFID is contactless and fulfils the highest requirement (high-level coding) of protection against manipulation of **ISO 14119**.

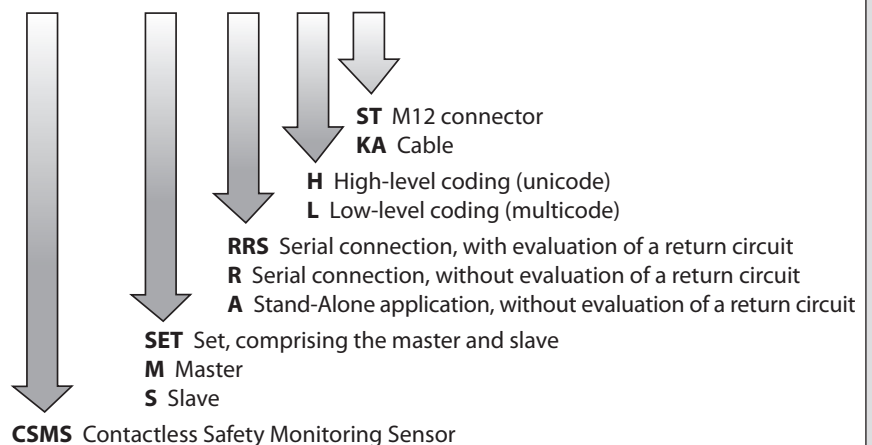
The BERNSTEIN CSMS offers both a high-level coding and a low-level coding, in order to provide the optimum protection against manipulation for each application.

The safety-related capacity of the CSMS is demonstrated through full observation of the following standards:

- Requirements for safety-related parts of control systems up to **PL e** in accordance with **ISO 13849-1**
- Functional safety up to **SIL 3** in accordance with **IEC 62061**
- Choice and use of safety-related interlocking devices of **type 4** in accordance with **ISO 14119**


unicode/high coding:
Sensor accepts only one actuator
multicode/low coding:
Sensor accepts several actuators

CSMS - SET - RRS - H - ST



Sensing distance

Rated sensing distance	S_n	13 mm
Assured sensing distance – (On)	S_{ao}	min. 10 mm
Hysteresis	H	0,5 mm
Assured sensing distance – (Off)	S_{ar}	max. 19 mm

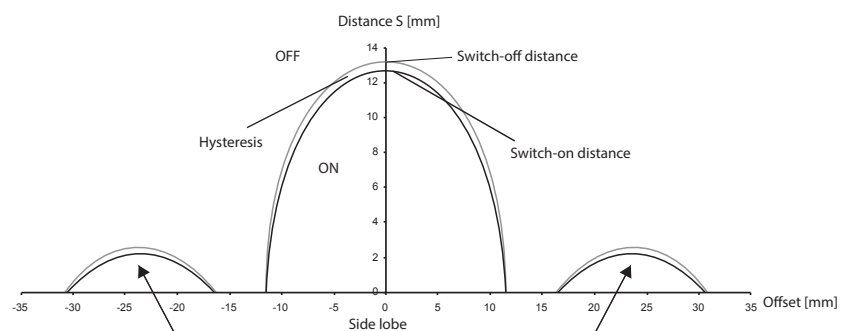

Metal can influence the sensing distance.

To achieve the stated sensing distances on metal substrates, CSMS spacers must be used.

CSMS-RRS with evaluation of a return circuit

Advantages

- Individual CSMS or safe serial connection with max. 32 CSMS up to **PL e**
- Manual or automatic start
- No external safety evaluation unit required
- Uni- or multi-coding
- Integrated evaluation of a return circuit and start button with direct connection to contactors

Unicode	Multicode	M12 connector	2 m cable + M12 connector	Article number	Designation
x			x	6075988057	CSMS-SET-RRS-H-KA
x		x		6075988058	CSMS-SET-RRS-H-ST
	x	x		6075988066	CSMS-SET-RRS-L-ST
	x		x	6075988068	CSMS-SET-RRS-L-KA
x			x	6075985048	CSMS-M-RRS-H-KA
x		x		6075986050	CSMS-M-RRS-H-ST
	x		x	6075985061	CSMS-M-RRS-L-KA
	x	x		6075986062	CSMS-M-RRS-L-ST
	Replacement actuator Multicode			6075980065	CSMS-S-L
	Replacement actuator Unicode			6075980052	CSMS-S-H*

*Must be taught in with 6075989056 (CSMS SLAVE TEACHADAPTER) for the master.

CSMS-R for the connection to a safety evaluation unit

Advantages

- Safe serial connection with max. 32 CSMS up to **PL e**
- Connection to an external safety evaluation unit for ex. SCR ON
- Optional: Connection of a safety sensor (for ex. safety light curtain) with OSSD output to the first CSMS
- Uni- or multi-coding

Unicode	Multicode	M12 connector	2 m cable + M12 connector	Article number	Designation
x			x	6075988059	CSMS-SET-R-H-KA
x		x		6075988060	CSMS-SET-R-H-ST
	x	x		6075988067	CSMS-SET-R-L-ST
	x		x	6075988069	CSMS-SET-R-L-KA
x			x	6075985049	CSMS-M-R-H-KA
x		x		6075986051	CSMS-M-R-H-ST
	x		x	6075985063	CSMS-M-R-L-KA
	x	x		6075986064	CSMS-M-R-L-ST
	Replacement actuator Multicode			6075980065	CSMS-S-L
	Replacement actuator Unicode			6075980052	CSMS-S-H*

*Must be taught in with 6075989056 (CSMS SLAVE TEACHADAPTER) for the master.

CSMS-A for direct connection to a control unit

Advantages

- Up to **PL e / SIL 3**
- Multi-coding
- Compact construction
- Connection to an external safety evaluation unit for ex. SCR ON

Unicode	Multicode	M12 connector	2 m cable	Article number	Designation
	x	x		6075988072	CSMS-SET-A-L-ST
	x		x	6075988073	CSMS-SET-A-L-KA
	x		x	6075985070	CSMS-M-A-L-KA
	x	x		6075986071	CSMS-M-A-L-ST
	Replacement actuator Multicode			6075980065	CSMS-S-L

CSMS diagnosis

The CSMS product family offers one of the largest diagnostic options on the market. Opened protective devices or actuators in the transitional area as well as system failures can be rapidly and precisely identified. Due to the optional diagnostic devices, the status of each CSMS appears in the security chain.



- Status display of each CSMS in the security chain
- Electronical outputs or bus interface

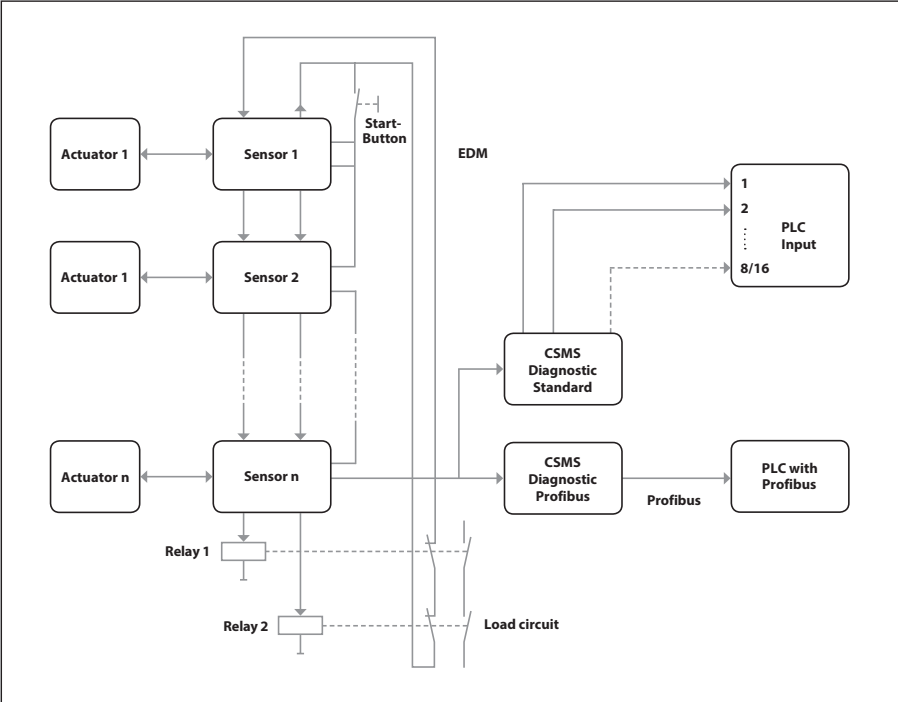
CSMS Standard Diagnosis

The CSMS Standard Diagnosis has 8 or 16 electronic outputs. Each output is assigned to one CSMS. It is possible to switch on the output, even at the maximum operating distance. The output is switched on by dip switches on the diagnostic device. In maximum system conception, the status of all 32 CSMS can be displayed simply by cascading the diagnostic devices.

CSMS Diagnosis Profibus

The CSMS Diagnosis Profibus with Profibus interface ensures the direct transmission of the diagnostic information from each CSMS to the control unit. Advantages include considerably reduced wiring expenses, a clearer arrangement and a substantially higher functionality. As well as protective devices in an open position or in the transitional area, attempts to tamper with the machine and system errors can also be detected. The machine down time can be reduced to a minimum by the extensive diagnostic options. Further bus systems on request.

Parallel connection



Article number	Designation	Description
6075989031	CSMS DIAGNOSE STANDARD 8	Diagnosis for 8 CSMS
6075989032	CSMS DIAGNOSE STANDARD 16	Diagnosis for 16 CSMS
6075989033	CSMS DIAGNOSE PROFIBUS	Profibus Gateway

Magnetic controllers for safety functions

BERNSTEIN offers magnetic controllers for safety functions that fulfill performance level d according to EN 13849-1 and SIL 3 according to EN 61508 or rather EN 62061.

A safety system consists of the safety magnetic controllers and a coded transducer unit.

The anti-tamper security of the transducer unit is achieved by variable coding of the actuator magnets and magnetic switches.

The safety magnetic controller processes the NC or NO contact signals coming from the coded magnetic switches.

Thereby, it is possible to detect the opening of the safety guard (door, hatch, protective hood etc.) and to turn off the safety output. Thanks to the redundant evaluation, the magnetic controller is switched to the "safe state" should a fault or manipulation occur, or if the time difference is exceeded between the NC contact signal and the NO contact signal. An LED indicates that the safety magnetic controller is in the "safe state".

To ensure fault detection of the switch-off device, the MÜZ-102 offers the possibility to connect a return circuit. The system additionally features a NC contact for signalling purposes.

- Redundancy by NO and NC contacts
- Manipulation safety by coding
- Monitoring of the return circuit (depending on device type)



Depending on the type of device, one or two coded transducer units (magnetic switch with corresponding magnet) of type:

- MAK-4236
- MAK-5236
- MAK-5336

can be connected to and monitored by the safety magnetic controllers.



MAK-4236-x with magnet TK-42-CD



MAK-5236-x with magnet TK-52-CD / 2



MAK-5336-x with magnet TK-43-CD

Magnetic controllers
for safety functions

TÜV certified

- EN ISO 13849-1 Performance Level d
- EN 61508 and EN 62061 SIL 3
- EN 60947-5-3 Single fault security S



Type designation	MÜZ-102/D24-FL-DA	MÜZ-202/D24-FL
Article number	6392701306	6392702307
Max. number of connectable transducer units	1	2
Safety output, NO contact	●	●
Feedback circuit	●	–
Data output (NC contact)	●	–
Technical data		
Operating voltage	24 V DC	24 V DC
Operating current	60 mA	60 mA

Switching capacity, safety output

Switching voltage	max	AC 250 V	AC 250 V
Switching current	max	8 A	8 A
Switching power	max	1700 VA	1700 VA
LED: Hazard status/switching status	●/–	●/–	●/–
LED: Supply voltage/ON	●	–	–
Relay: Positive-action/standard	●/–	●/–	●/–

Ambient conditions

Temperature range	min/max	0 °C/+55 °C	0 °C/+55 °C
		32 °F/+131 °F	32 °F/+131 °F
Protection class (to IEC 529, EN 60529)		IP20	IP20
Enclosure material		PC	PC
Mounting system (DIN 50022)		TS 35	TS 35
Type of connection: Terminal block		max. 2.5 mm ²	max. 2.5 mm ²

Coded transducer units

Magnetic switches



Type designation
Article number
Cable length

Type designation
Article number
Cable length

Type designation
Article number
Cable length

Ambient conditions		
Temperature range	min/max	
Protection class (to IEC 529, EN 60529)		
Enclosure material		
Sensing distance	S on	min
	S on	max

Actuating magnet		
Type designation		
Article number		
Use: safety magnetic controller		
Article number		

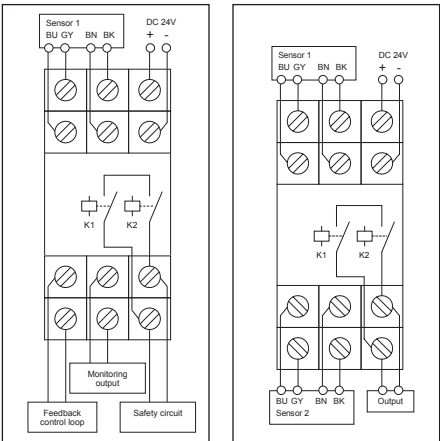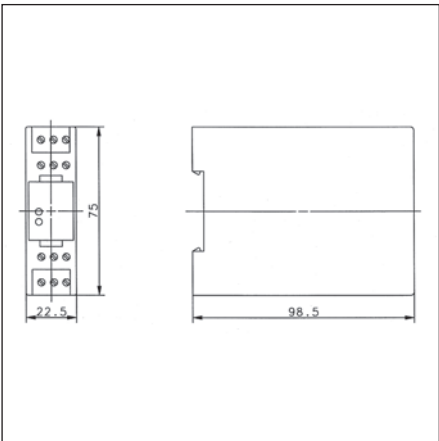




All dimensions in mm
Other types available on request.




MAK-4236-3 6490642315 3 m PVC cable	MAK-5236-3 6490652316 3 m PVC cable	MAK-5336-3 6490653317 3 m PVC cable
MAK-4236-6 6490642302 6 m PVC cable	MAK-5236-6 6490652307 6 m PVC cable	MAK-5336-6 6490653311 6 m PVC cable
MAK-4236-9 6490642303 9 m PVC cable	MAK-5236-9 6490652308 9 m PVC cable	MAK-5336-9 6490653312 9 m PVC cable
MAK-4236-STK 6490642305 4-pin connector	MAK-5236-STK 6490652309 4-pin connector	MAK-5336-STK 6490653313 4-pin connector

-5 °C/+70 °C +23 °F/+158 °F IP67 PA 6.6 4 mm 14 mm	-5 °C/+70 °C +23 °F/+158 °F IP67 PBT 3 mm 14 mm	-5 °C/+70 °C +23 °F/+158 °F IP67 PA 6.6 3 mm 14 mm
---	--	---

TK-42-CD 6402042310 6392701306 6392702307	TK-52-CD/2 6402052311 6392701306 6392702307	TK-43-CD 6402043312 6392701306 6392702307
---	---	---

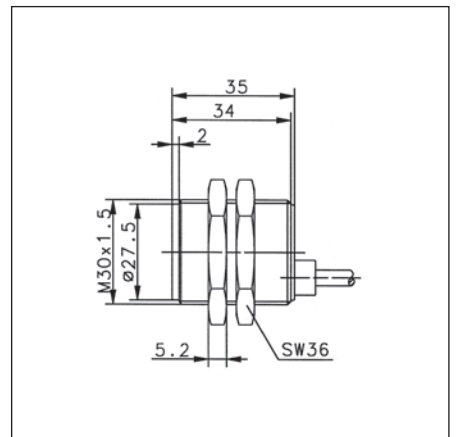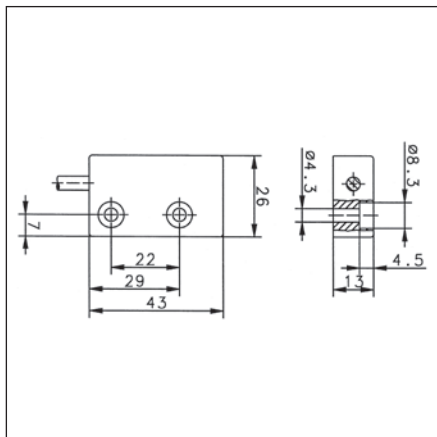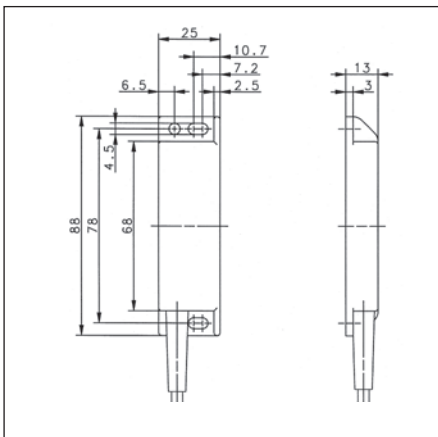

SRM, SR

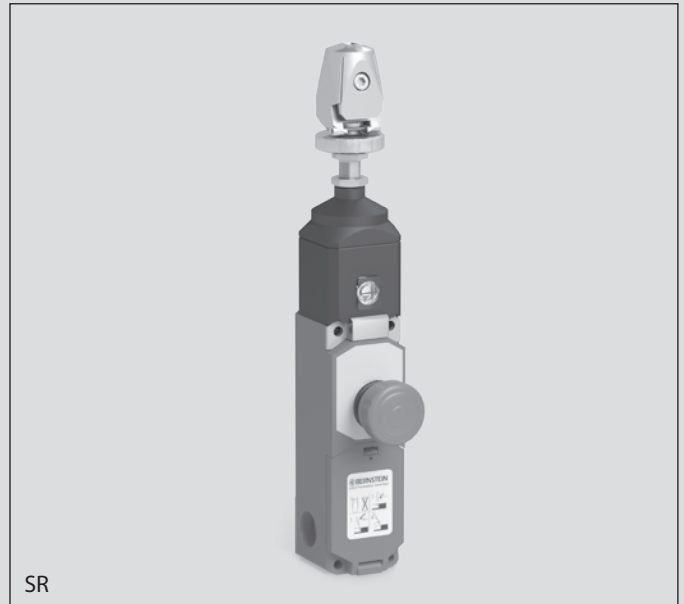

General information on safety rope pull switches

The series SR and SRM safety rope pull switching devices developed and manufactured by BERNSTEIN AG are designed and approved in accordance with the standards IEC 947-5-5, DIN EN 60947-5-5 and ISO 13850, i.e. on actuation or in the event of cable breakage, the emergency stop switching device locks automatically and can only be reset to its initial setting by means of the resetting device on the switch.

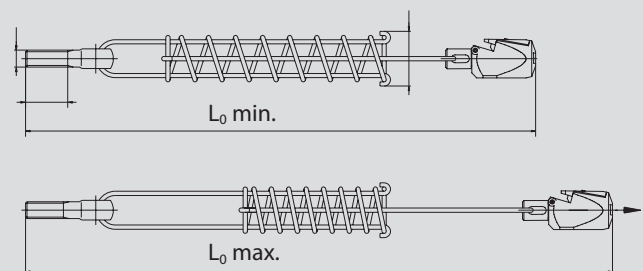
In order for the overall system to conform to the standards EN 60947-5-5 and EN 13850 governing the emergency stop function of rope pull switches it is necessary to integrate a spring in the system. The reasoning behind this requirement is that a person who triggers the emergency stop functions does not need to consider the activation direction. With the spring it is possible to pull the cable in the direction of the rope pull switch, thus activating the emergency stop function.

Safety rope pull switches may only be used in control power circuits. Safety rope pull switches are used on accessible sides of conveyor systems or machines. In contrast to Emergency Stop switching devices (e.g. mushroom pushbuttons) installed at intervals, with which the emergency stop signal can only be generated at the device itself, with the safety rope pull switch it is possible to generate the signal at any point in a section. Depending on the type of switching device, a span of up to 75 m can be achieved with a pull cable connected to the pulling element.

The maximum possible span length of a pull cable switch is always dependent on the temperature fluctuations to which the system is exposed. It is possible that the pull cable switch may trip due to the fact that, owing to its temperature coefficient, the length of the steel cable can change in response to changes in temperature. Ultimately, this change in length is dependent on the length of the cable, the difference in the temperature change and the type of springs used in the pull cable switch. Overview 1 shows which cable lengths are possible as a function of change in temperature.

Pull cable counterspring

With overstretch safeguard based on compression spring principle



Application		
Type	SR...100/SR...175/SRM...175	SR...300/SRM...300
Spring Art. No.	3911042153	3911042154
L ₀ min.	383	483
L ₀ max.	487	653

Advantages of SRM / SR safety rope pull switches:

- The SR (plastic enclosure) and SRM (metal enclosure) safety rope pull switches are available with the Quickfix quick-connect system, which renders unnecessary cable eye stiffeners, cable grips and turnbuckles that are otherwise required for mounting the cable. Added to this, the time required to install the cable is drastically reduced. Versions with a conventional eye are, of course, also available.
 - All variants of the SRM and especially of the SR are equipped with an integrated emergency stop impact button that can be actuated by pressing in hazardous situations. In the same way as pulling the pull cable, the safety contacts are opened and the switch is locked.
 - The type SRM...E-... safety rope pull switches are optionally available with a remote indicator for monitoring the cable tension. This option has an integrated sensor unit that monitors situations in which the cable tension may overshoot or undershoot the permissible value, or triggering of the safety rope pull switch is imminent.
- This electronic output signals in good time that maintenance / adjustment is required otherwise the machine will shut down. This output can also be used for event signalling purposes or optionally available indicator lamps can be connected. This connection configuration conforms to "preventative maintenance" requirements.
- During installation / adjustment of the cable span, the correct tension of the cable can be checked through the integrated inspection window. To ensure optimum cable tension as part of the adjustment procedure, the tips of the indicator arrows should be aligned with the marking.
 - A second inspection window integrated in the SRM version makes it possible to check the status of the locking function and of the contacts. Yellow in the inspection window indicates that the safety rope pull switch is locked. Green in the inspection window indicates that the rope pull switch is ready for operation and the cable assembly is monitored.

Overview 1

		Span L max. in metres [m]																																															
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	55	60	65	70	75								
Max. temperature variation in Kelvin (K)	+/- 80 K ; +/- 110 K																																																
	+/- 70 K ; +/- 100 K																																																
	+/- 60 K ; +/- 90 K																																																
	+/- 50 K ; +/- 70 K																																																
	+/- 40 K ; +/- 50 K																																																
	+/- 30 K ; +/- 40 K																																																
	+/- 20 K ; +/- 26 K																																																
	+/- 10 K ; +/- 14 K																																																
	+/- 7 K ; +/- 9 K																																																
SR...100	Max. span 25 metres																																																
SR...175 / SRM...175	Max. span 37.5 metres																																																
SR...300 / SRM...300	Max. span 75 metres																																																

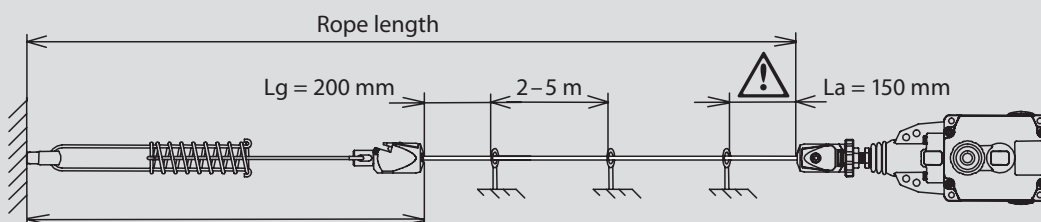
The parameter 100, 175 and 300 in the product designation indicates the force of the springs used in the rope pull switch. It should be noted that a greater actuating force is required for higher spring forces.

The indications of the temperature ranges refer to a system for emergency stop applications with return spring.

With a system without return spring, emergency stop applications are not permitted.

In this case, the above mentioned Kelvin values have to be halved.

Installation example





Safety Rope Pull Switches

Max. span length

75 metres (Dimensioned drawing 1)

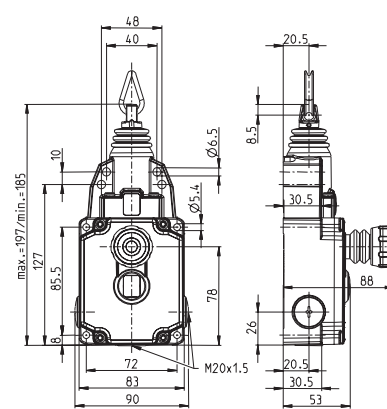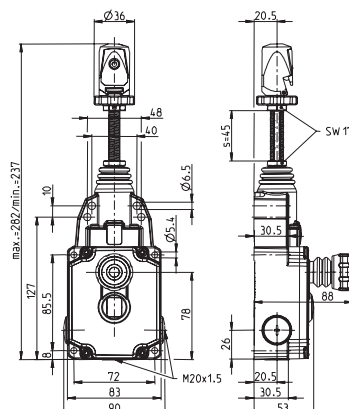37,5 metres (Dimensioned drawing 2)



2 NC / 2 NO

3 NC / 1 NO

2 NC / 2 NO

3 NC / 1 NO

Quickfix
(Dimensioned drawing 1)

6012929087
SRM-U1Z/U1Z-QF-300

6012999096
SRM-A2Z/U1Z-QF-300

6012929085
SRM-U1Z/U1Z-QF-175

6012999094
SRM-A2Z/U1Z-QF-175

Eye
(Dimensioned drawing 2)

6012921091
SRM-U1Z/U1Z-LU-300

6012991100
SRM-A2Z/U1Z-LU-300

6012921089
SRM-U1Z/U1Z-LU-175

6012991098
SRM-A2Z/U1Z-LU-175

Quickfix with remote monitoring
(Dimensioned drawing 1)

6012929088
SRM-U1Z/U1Z-QF-300-E

6012999097
SRM-A2Z/U1Z-QF-300-E

6012929086
SRM-U1Z/U1Z-QF-175-E

6012999095
SRM-A2Z/U1Z-QF-175-E

Eye with remote monitoring
(Dimensioned drawing 2)

6012921092
SRM-U1Z/U1Z-LU-300-E

6012991101
SRM-A2Z/U1Z-LU-300-E

6012921090
SRM-U1Z/U1Z-LU-175-E

6012991099
SRM-A2Z/U1Z-LU-175-E

Approvals





Technical data

Electrical data		
Rated insulation voltage	U _i max.	250 V AC
Rated operating voltage	U _e max.	240 V
Conventional thermal current	I _{the}	10 A
Utilisation category	U _e /I _e	AC-15, U _e /I _e 240 V / 3 A; 120 V/6 A DC-13 U _e /I _e 250 V/0.27 A; 125 V/0.55 A
Short-circuit protection		6 A gL/gG
Protection class		I
Mechanical data		
Enclosure	Aluminium pressure die-casting	
Ambient temperature	−30°C to + 80°C	
Mechanical service life	1 x 10 ⁵	
Switching frequency max.	≤ 20 / min.	
Mounting	4 x M6 or 4 x M5	
B10d	0.2 mill.	
Type of connection	Screw connections	
Conductor cross sections	Single-wire 0.5 – 1.5 mm ²	
Cable entry	3 x M20 x 1.5	
Protection class	IP 67 conforming to IEC/EN 60529	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1 VDE 0660 T210, DIN EN 60947-5-5, IEC 60947-5-5 ISO 13850		



Contact type	1 NC / 1 NO (Zb)	2 NC (Zb)
---------------------	-------------------------	------------------

Action contacts	U1Z	A2Z
------------------------	------------	------------

Circuit symbol	Slow-action contacts 	Slow-action contacts 
-----------------------	---	---

Switching diagram		
--------------------------	--	--

☒ On
☐ OFF




The pulling force data depend on the type of switch used. (SRM...175/SRM...300)
Tolerances: Switching point + / - 0.5 mm, actuating force + / - 15 %


Safety Rope Pull Switches

Max. span length

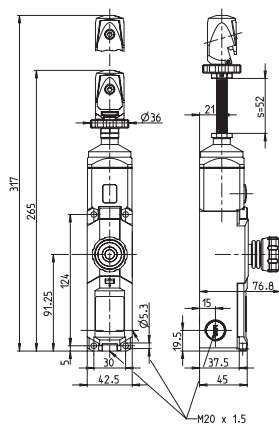75 metres (Dimensioned drawing 1)



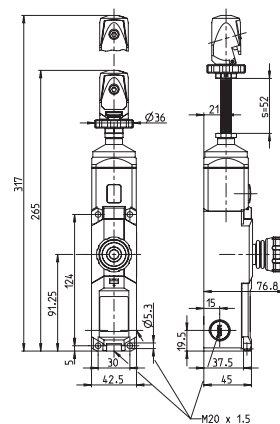37.5 metres (Dimensioned drawing 2)



2 NC / 2 NO

4 NC

2 NC/2 NO

4 NC

Quickfix (Dimensioned drawing 1)

6011629072
SR-U2Z-0-OF-300-L0-0-0

6011691082
SR-A4Z-0-OF-300-L0-0-0

6011629071
SR-U2Z-0-OF-175-L0-0-0

6011691081
SR-A4Z-0-OF-175-L0-0-0

Quickfix N.A.
(Dimensioned drawing 2)

6011629069	6011691079
SR-U27-NA-OF-300-L0-0-0	SR-A4Z-NA-OF-300-L0-0-0

6011629068	6011691078
SR-U2Z-NA-OF-175-L0-0-0	SR-A4Z-NA-OF-175-L0-0-0

Eye
(Dimensioned drawing 3)

6011621066	6011691076
SR-U2Z-0-LU-300-L0-0-0	SR-A4Z-0-LU-300-L0-0-0


6011621065	6011691075
SR-U2Z-0-LU-175-L0-0-0	SR-A4Z-0-LU-175-L0-0-0

Approvals



Technical data

Electrical data		
Rated insulation voltage	U _i max.	250 V AC
Rated operating voltage	U _e max.	240 V
Conventional thermal current	I _{the}	10 A
Utilisation category	U _e /I _e	AC-15, U _e /I _e 240 V / 3 A
Short-circuit protection		6 A gL/gG
Protection class		II, Insulated
Mechanical data		
Enclosure	PA 6 GV (UL94-V0)	
Ambient temperature	-25°C to +70°C	
Mechanical service life	1 x 10 ⁵ switching cycles	
Switching frequency max.	≤ 20 / min.	
Mounting	4 x M5	
B10d	1 x 10 ⁵ million	
Type of connection	Cage clamp terminal	
Conductor cross sections	≤ 1.5 – 2 mm ²	
Cable entry	3 x M20 x 1.5	
Protection class	IP 67 conforming to IEC/EN 60529	
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1 VDE 0660 T210, DIN EN 60947-5-5, IEC 60947-5-5 ISO 13850		

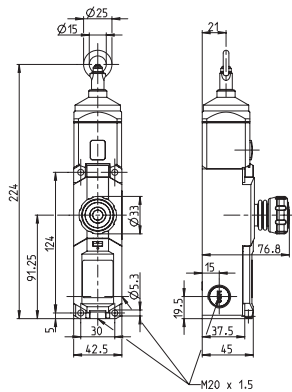25 metres (Dimensioned drawing 3)

2 NC / 2 NO
4 NC
6011629070

SR-U2Z-0-QF-100-L0-0-0

6011691080

SR-A4Z-0-QF-100-L0-0-0

6011629067

SR-U2Z-NA-QF-100-L0-0-0

6011691077





SR-A4Z-NA-QF-100-L0-0-0

6011621064

SR-U2Z-0-LU-100-L0-0-0

6011691074


SR-A4Z-0-LU-100-L0-0-0


Contact type
2 NC / 2 NO (Zb)
4 NC
Action contacts
U2Z
A4Z
Circuit symbol
Slow-action contacts

Slow-action contacts

Switching diagram
☒ On
☐ Off

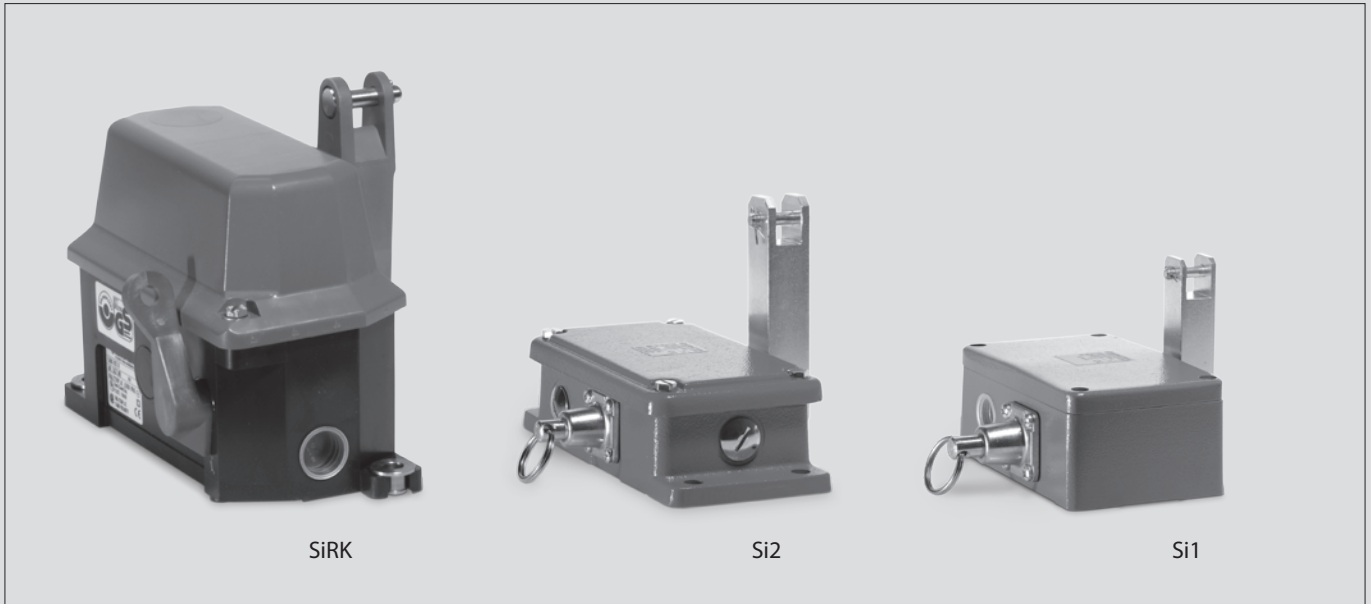
The pulling force data depend on the type of switch used. (SR...100/SR...175/SR...300)
Tolerances: Switching point ± 0.5 mm, actuating force $\pm 15\%$

Double-Spanned Rope Pull Switches

SiRK, Si1, Si2

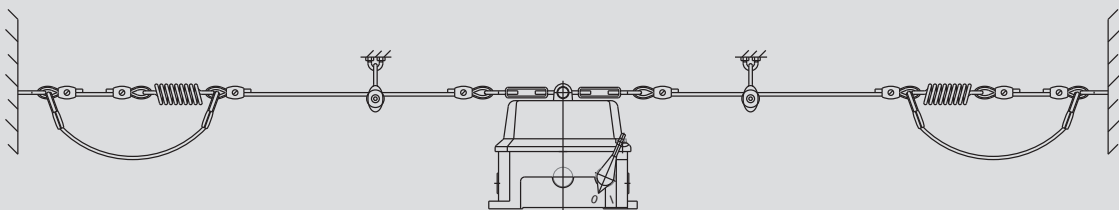
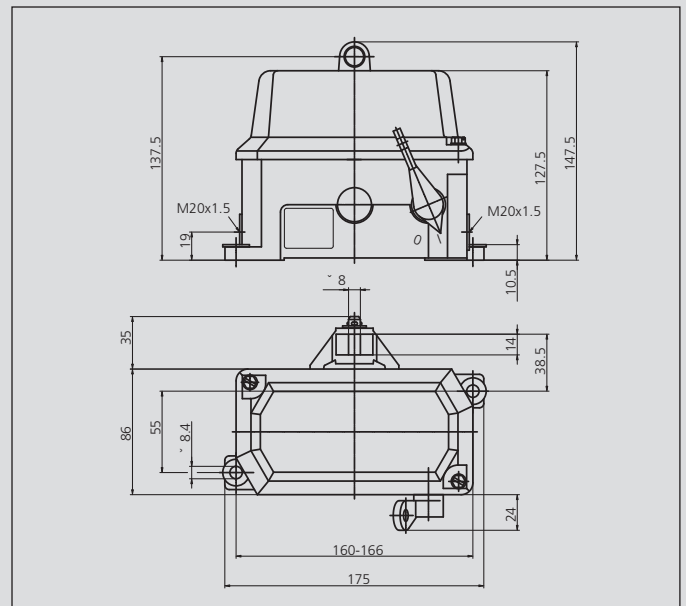


BERNSTEIN double-spanned rope pull switches (SiRK, Si1 and Si2) are also used in emergency stop applications. When the cable is pulled the switching lever is deflected in the corresponding direction and the system shut down.

The switches are available in two metal versions, the Si1 and Si2, as well as an insulation-enclosed version, the SiRK.

These types of rope pull switch are ideally suited for applications with high temperature fluctuations and long cable spans. With their sturdy enclosure, the Si1 and Si2 are the perfect switches for harsh environments.

Two cables spanned in opposite directions are attached to the switching device. The countersprings are secured to the wall at the ends of the cables. Provided the change in temperature is the same at all points along the cable, the springs will effectively compensate for the change in cable length.



Product selection

Designation	Article number	Max. span length
SI1-U2Z AK R-RAST	6014735001	2 x 50 m
SI1-U1Z/U1Z AK R-RAST	6014735025	2 x 50 m
SI2-U2Z AK R-RAST	6015735002	2 x 50 m
SIRK-U2Z R	6015625001	2 x 75 m


Technical data

		SiRK	Si1	Si2
Electrical data				
Rated insulation voltage	U_i	250 V AC	250 V AC	400 V AC
Rated operating voltage	U_e	240 V	250 V	240 V
Conventional thermal current	I_{the}	10 A	10 A	10 A
Utilisation category		AC 15, A 300 240 V / 3 A, 120 V / 6 A DC 13, Q300 250 V/0.27 A, 125 V/0.55 A	AC-15, U_e / I_e 240 V / 3 A	AC-15, U_e / I_e 240 V / 3 A
Positive opening action	→	as per IEC/EN 60947-5-1, Addendum K	as per IEC/EN 60947-5-1, Addendum K	as per IEC/EN 60947-5-1, Addendum K
Short-circuit protection		Fuse 6 A gL/gG	Fuse 6 A gL/gG	Fuse 10 A gL/gG
Protection class		II, Insulated	I	I
Mechanical data				
Enclosure		ABS	Aluminium sand casting	Cast iron
Cover		ABS	Aluminium sand casting	Cast iron
Actuation		Lever, plastic (glass fibre-reinforced)	Lever (GRP)	Lever (GRP)
Ambient temperature		- 30°C to + 80°C	- 30°C to + 80°C	- 30°C to + 80°C
Contact type		2 NC / 2 NO contact (Zb)	2 NC / 2 NO contact (Zb)	2 NC / 2 NO contact (Zb)
Mechanical service life (up to) ^①		1 x 10 ⁵ switching cycles	1 x 10 ⁶ switching cycles	1 x 10 ⁶ switching cycles
Switching frequency max.		Max. 30/min.	≤ 10 / min.	≤ 10 / min.
Mounting		2 x M8	4 x M8	4 x M8
B10d (up to) ^①		0,2 mill.	2 mill.	2 mill.
Type of connection		8 Screw connections (M3, 5)	8 Screw connections (M3, 5)	8 Screw connections (M3, 5)
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry		2 x M20 x 1.5	1 x M20 x 1.5	3 x M20 x 1.5
Weight		≈ 0.8 kg	≈ 1.62 kg	≈ 4.21 kg
Installation position		Any	Any	Any
Protection class		IP 65 conforming to EN 60529	IP 65 conforming to EN 60529	IP 65 conforming to EN 60529
Standards				
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1				

① Depending on switching system. See Table on Pages 70 – 73.

Double-Spanned Rope Pull Switches

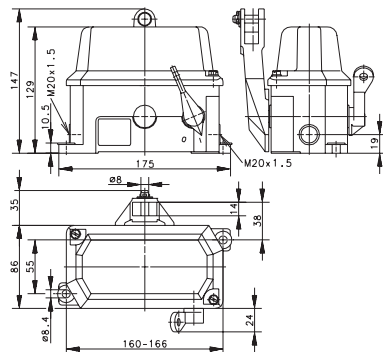
SIRK



Variant 1

Article No.
Designation
Max. span


6015625001
SIRK-U2Z R
2 x 75 m




Variant 2

Article No.
Designation
Max. span

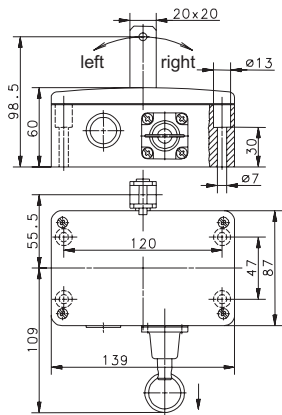
SI1



6014735001
SI1-U2Z AK R-RAST
2 x 50 m



6014735025
SI1-U1Z/U1Z AK R-RAST
2 x 50 m



Variant 3

Article No.
Designation
Max. span

Technical Data

Rated insulation voltage U_i max.
Rated operating voltage U_e max
Conventional thermal current I_{th}
Utilisation category U_e/I_e

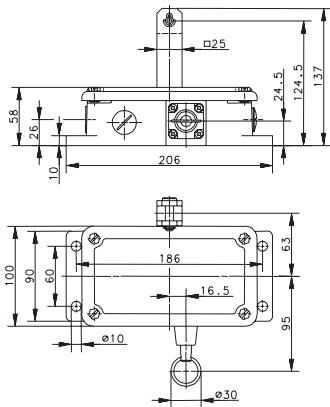
250 V AC
240 V
10 A
AC-15, 240 V/3 A, 120 V/6




Approvals

250 V AC
240 V
10 A
AC-15, 240 V/3 A



SI2


6015735002
 SI2-U2Z AK R-RAST
 2 x 50 m



400 V AC

240 V

10 A

AC-15, 240 V/3 A



Standard Rope Pull Switches

With and Without Latching Function



Because of their specifications governed by corresponding standards (see Cable Safety Pull Switches SRM/SR), these cable pull switches are used exclusively as safety command devices.

These switches are available in metal enclosures as well as in insulation-enclosed versions. They are operated manually by pulling on the attached cable.

Thanks to their pretension, these switches, which feature a switching contact with overlap, execute a switching function when the cable is pulled or in the event of cable breakage.

The field of application for these rope pull switches includes

- Opening and closing of (garage) doors
- Starting machines
- Issuing commands in production processes

The basic design of the standard rope pull switches is based on that of position switches.


The specified cable length refers to the maximum length at minimum temperature variation. The maximum cable length may decrease under different environmental conditions.

Technical data		SEK	SiEK	SEM2	SiEM2
Electrical data					
Rated insulation voltage U_i		400 V AC	400 V AC	400 V AC	400 V AC
Rated operating voltage U_e		240 V	240 V	240 V	240 V
Conventional thermal current I_{the}		10 A	10 A	10 A	10 A
Utilisation category U_e/I_e		AC-15, U_e/I_e 240 V / 3 A	AC-15, U_e/I_e 240 V / 3 A	AC-15, U_e/I_e 240 V / 3 A	AC-15, U_e/I_e 240 V / 3 A
Mechanical data					
Switching frequency max.		≤ 50/min.	max. 100/min.	max. 50/min.	max. 50/min.
Mechanical service life B10d		1 x 10 ⁶ switching cycles on request	1 x 10 ⁶ switching cycles on request	1 x 10 ⁶ switching cycles on request	1 x 10 ⁶ switching cycles on request
Short-circuit protection		Fuse 10 A gL/gG	Fuse 10 A gL/gG	Fuse 10 A gL/gG	Fuse 10 A gL/gG
Protection class		II, Insulated	II, Insulated	I	I
Ambient temperature		– 30°C to + 80°C	– 30°C to + 80°C	– 30°C to + 80°C	– 30°C to + 80°C
Protection class		IP 65 conforming to IEC/EN 60529	IP 65 conforming to EN 60529	IP 65 conforming to EN 60529	IP 65 conforming to EN 60529; DIN VDE 0470 T1
Type of connection		4 Screw connections (M3, 5)	4 Screw connections (M3, 5)	4 Screw connections (M3, 5)	Screw connections
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Enclosure		Thermoplastic, glass fibre-reinforced	Thermoplastic, glass fibre-reinforced	Aluminium pressure die-casting	Aluminium pressure die-casting
Cable entry		1 x M20 x 1.5	1 x M20 x 1.5	1 x M20 x 1.5	1 x M20 x 1.5
Standards					
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1					


Technical data		SD	SiD	SIN	SGC	Si88
Electrical data						
Rated insulation voltage U_i		400 V AC	400 V AC	400 V AC	400 V AC	250 V AC
Rated operating voltage U_e		240 V	240 V	240 V	240 V	240 V
Conventional thermal current I_{the}		16 A	16 A	10 A	10 A	10 A
Utilisation category U_e/I_e		AC-15, U_e/I_e 240 V / 3 A	AC-15, U_e/I_e 240 V / 3 A	AC-15, U_e/I_e 240 V / 3 A	AC-15, U_e/I_e 240 V / 3 A	AC-15, U_e/I_e 240 V / 3 A
Mechanical data						
Switching frequency max.		≤ 20/min.	max. 20/min.	≤ 20/min.	≤ 20/min.	≤ 50/min.
Mechanical service life B10d		1 x 10 ⁶ switching cycles on request	1 x 10 ⁶ switching cycles on request	1 x 10 ⁶ switching cycles on request	1 x 10 ⁶ switching cycles on request	1 x 10 ⁶ switching cycles on request
Short-circuit protection		Fuse 10 A gL/gG	Fuse 10 A gL/gG	Fuse 10 A gL/gG	Fuse 10 A gL/gG	Fuse 10 A gL/gG
Protection class		I	I	I	I	I
Ambient temperature		– 30°C to + 80°C	– 30°C to + 80°C	– 30°C to + 80°C	– 30°C to + 80°C	– 30°C to + 80°C
Protection class		IP65 conforming to EN 60529	IP65 conforming to EN 60529	IP65 conforming to EN 60529	IP 65 conforming to EN 60529	IP 65 conforming to EN 60529
Type of connection		Screw connections	Screw connections	Screw connections	Screw connections	Screw connections
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Enclosure		Aluminium pressure die-casting	Aluminium pressure die-casting	Aluminium pressure die-casting	Aluminium pressure die-casting	Thermoplastic, glass fibre-reinforced
Cable entry		2 x M20 x 1.5	2 x M20 x 1.5	2 x M20 x 1.5	1 x M20 x 1,5	1 x M20 x 1,5
Standards						
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1						

Standard Rope Pull Switches

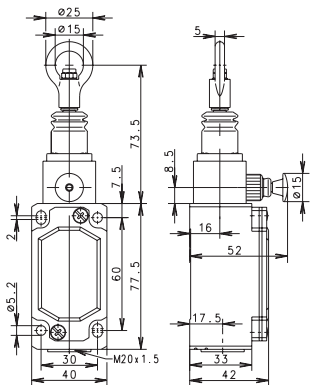SIEM2 RAST




SID RAST

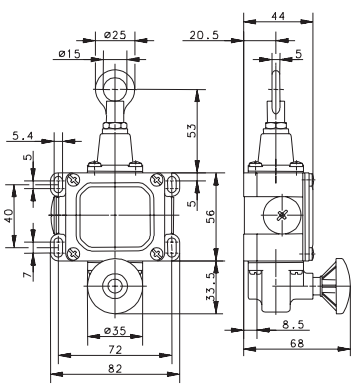


Variant 1

Article No.
Designation
Max. span

6012831023
SIEM2-UV1Z P-RAST
6 m




6011411868
SD-U1 P-RAST
8 m



Variant 2

Article No.
Designation
Max. span

6111431060
SID-UV1Z P-RAST
15 m



Variant 3

Article No.
Designation
Max. span

6011431869
SID-UV1Z P-RAST
12 m

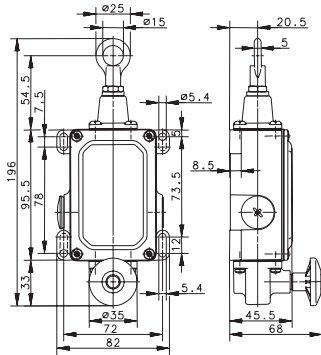


Technical data


Rated insulation voltage U_i max.
Rated operating voltage U_e max
Conventional thermal current I_{thc}
Utilisation category U_e/I_e

400 V AC
240 V
10 A
AC-15, 240 V/3 A



400 V AC
240 V
16 A
AC-15, 240 V/3 A

SID RAST

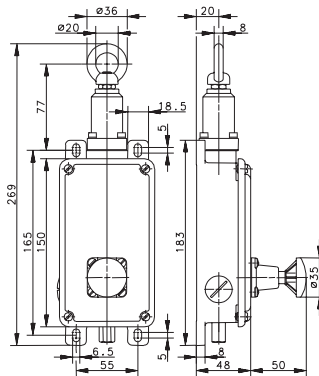

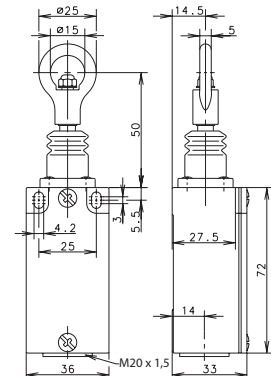
6112431050
SID-UV1Z P-RAST
35 m




6012441907
SID-UV2Z P-RAST
18 m


SIN RAST


6013531367
SIN-UV1Z P-RAST
60 m


SGC


6011211908
SGC-U1Z
4 m



400 V AC

240 V

16 A

AC-15, 240 V/3 A

400 V AC

240 V

10 A

AC-15, 240 V/3 A

400 V AC

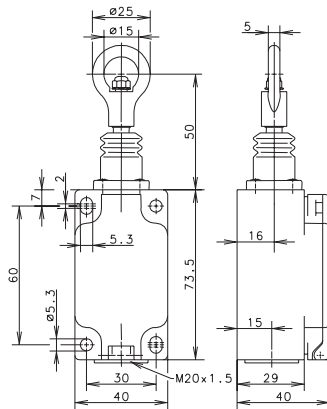
240 V

10 A

AC-15, 240 V/3 A

Standard Rope Pull Switches


SEK/SIEK



Variant 1

Article No.
Designation
Max. span


6011811133
SEK-U1Z
6 m



Variant 2

Article No.
Designation
Max. span


6011831134
SIEK-UV1Z
4 m




Variant 3

Article No.
Designation
Max. span

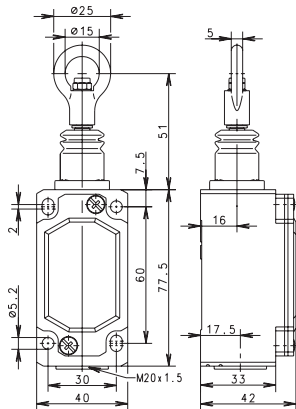
SEM/SIEM2



6012811029
SEM2-U1Z
6 m



6012831022
SIEM2-UV1Z
6 m











Technical data



Rated insulation voltage U_i max.
Rated operating voltage U_e max
Conventional thermal current I_{th}
Utilisation category U_e/I_e

400 V AC
240 V
10 A
AC-15, 240 V/3 A

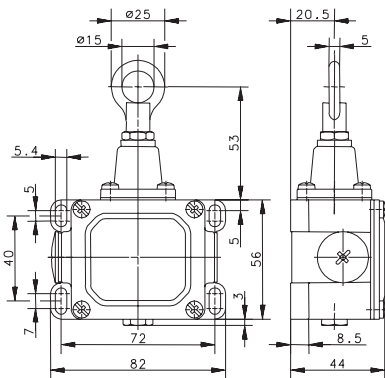400 V AC
240 V
10 A
AC-15, 240 V/3 A


SD

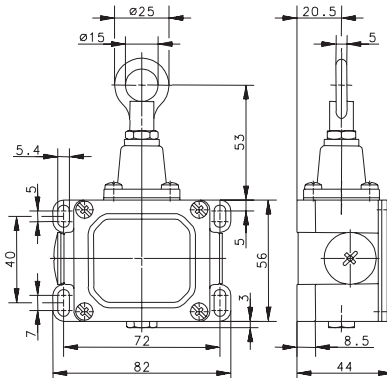6011411856
SD-U1
8 m

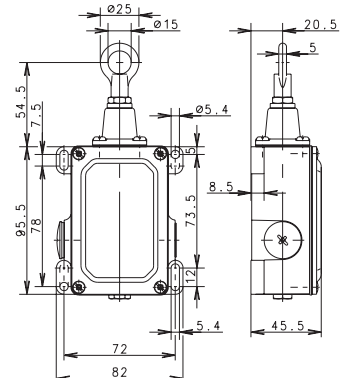6111411029
SD-U1
6 m

6111411161
SD-U1
6 m

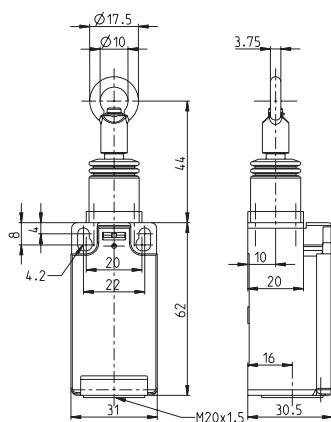500 V AC
240 V
16 A
AC-15, 240 V/3 A

SID

6011431857
SID-UV1Z
4 m

6111431022
SID-UV1Z
8 m

6111431069
SID-UV1Z
12 m

400 V AC
240 V
16 A
AC-15, 240 V/3 A

SID

6012431877
SID-UV1
8 m

500 V AC
240 V
16 A
AC-15, 240 V/3 A

Standard Rope Pull Switches

Si88



Variant 1

Article No.	Designation	Max. span
-------------	-------------	-----------


6013811107
SI88-U1Z
2 m



Variant 2


Article No.	Designation	Max. span
-------------	-------------	-----------

6013831108
SI88-UV1Z
2 m



Technical data

Rated insulation voltage U_i max.	250 V AC
Rated operating voltage U_e max	240 V
Conventional thermal current I_{the}	10 A
Utilisation category U_e/I_e	AC-15, 240 V/3 A

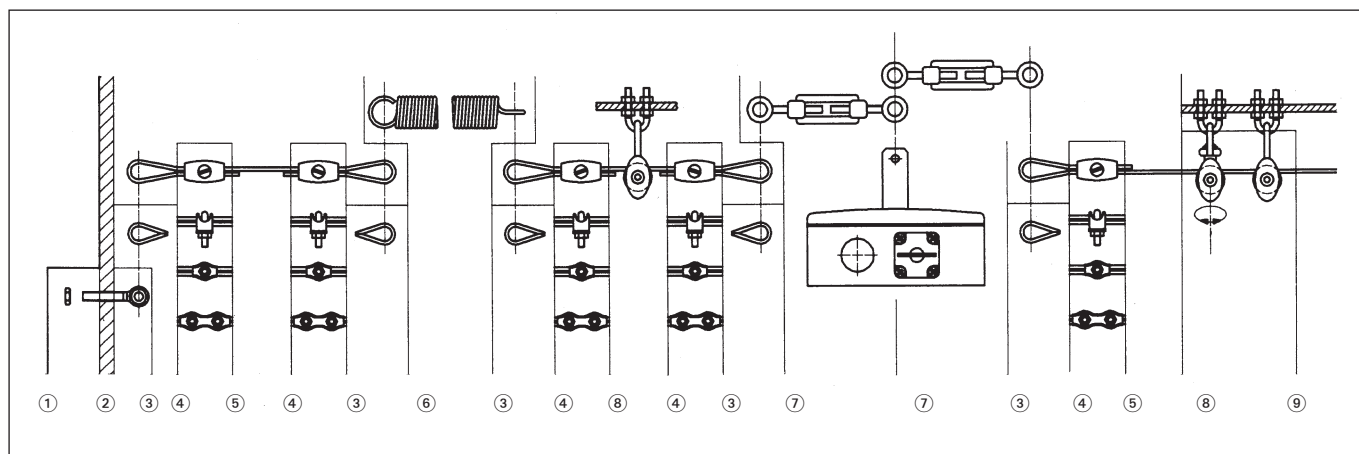

① Nut



Size	Strength class	Art. No.
M 6	DIN 439T2	A2-70
M 8	DIN 439T2	04
M 10	DIN 934	8

Coating: Thick-layer passivated (M 8/M 10), RoHs-compliant

② Eye bolt



Size	Strength class	Art. No.
M 10 x 50	4.6	2600444076
M 6 x 50	4.6	2600444185
M 8 x 50	4.6	2600444186

Coating: Thick-layer passivated, RoHs-compliant

③ Cable eye stiffener




Size	Art. No.
D 2.5	to DIN 65457
D 3	to DIN 65457
D 4	to DIN 65457
D 5	to DIN 6899B

Material: Steel strip

Coating: Blue passivated, RoHs-compliant

④ Cable grip




Size	Art. No.
D5	2690741002

Material: GTW/steel

Coating: Yellow chromated, RoHs-compliant

④ Cable grip, oval




Size	LG	BR	H1	H2	Art. No.
2	28 mm	15 mm	11 mm	13 mm	2690000004
3	28 mm	15 mm	12 mm	13 mm	2690000005
4	34 mm	20 mm	14 mm	18 mm	2690000006

Material: Refined zinc cast alloy

Coating: Blue passivated, RoHs-compliant

④ Cable grip, simplex




Size	LG	BR	H1	H2	Art. No.
2	15 mm	12 mm	5 mm	11 mm	2690000007
3	17 mm	14 mm	6 mm	14 mm	2690000008
4	20 mm	17 mm	7 mm	16 mm	2690000009

Material: Steel strip

Coating: Blue passivated, RoHs-compliant

Accessories for Rope Pull Switches

④ Cable grip, duplex



Size	LG	BR	H1	H2	Art. No.
2	35 mm	12 mm	5 mm	11 mm	2690000010
3	35 mm	14 mm	6 mm	14 mm	2690000011
4	40 mm	17 mm	7 mm	16 mm	2690000012

Material: Steel strip

Coating: Blue passivated, RoHS-compliant

⑤ Cable




Cable Ø / Sheath Ø	Design	Minimum breaking strength	Art. No.
D 1,8/D 5	Similar to DIN 3055	275 kp	3699100008
D 2/D 2.5	to DIN 3055	239 kp	3699100024
D 3/D 4	to DIN 3055	538 kp	3699100025
D 4/D 5	to DIN 3055	957 kp	3699100026

Material: Fibre-core galvanised, strength 1770 N/mm²

Coating: Blue passivated, RoHS-compliant


⑥ Compression spring, eye shape to DIN 1479



Fo	Fn	R	Lo	Ln	Art. No.
18 N	296 N	1.269 N/mm	188 mm	408 mm	3652100331
24 N	354 N	2.466 N/mm	180 mm	314 mm	3652100332
13.3 N	153 N	0.694 N/mm	185 mm	387 mm	3652100211
35.2 N	450 N	3.490 N/mm	201 mm	319 mm	3652100198

Material: Wire to DIN 2076 - 1.4310

⑦ Pull cable spring




Fn	R	Lo	Ln	Art. No.
218 N	2.1 N/mm	383 mm	487 mm	3911042153
335 N	1.9 N/mm	483 mm	653 mm	3911042154

Material: Wire to DIN 2076 - 1.4310, cable grip - zinc pressure die-cast alloy, eye bolt to DIN 444 - 4.6

Coating: Thick-layer passivated (except spring), RoHS-compliant

⑦ Turnbuckle sleeve



Size	Art. No.
M 6	2601479188
M 8	2601479189

Material: Steel, min. tensile strength 330 N/mm²

Coating: Blue passivated, RoHS-compliant

⑦ Turnbuckle similar to DIN 1480 with two eyes




Eyes	Art. No.
M 5 x 50	2691480016
M 6 x 60	2691480017

Material: Steel, forged


Coating: Blue passivated, RoHS-compliant

⑧ Pulley block, swivel version



Art. No.
2690000023
Material: Zinc pressure die-cast alloy (pulley polyamide)
Coating: Blue passivated, RoHS-compliant

⑧ Pulley block, fixed version




Art. No.
2690000022
Material: Zinc pressure die-cast alloy (pulley polyamide)
Coating: Blue passivated, RoHS-compliant

⑨ Mounting bracket for pulley to DIN 1142



Art. No.
3911751437
Material: Steel
Coating: Blue passivated, RoHS-compliant

Deflection pulley ø 75 mm for cable diameter up to 8 mm



Art. No.
2690000051
Material: Steel/polyamide
Coating: Blue passivated, RoHS-compliant

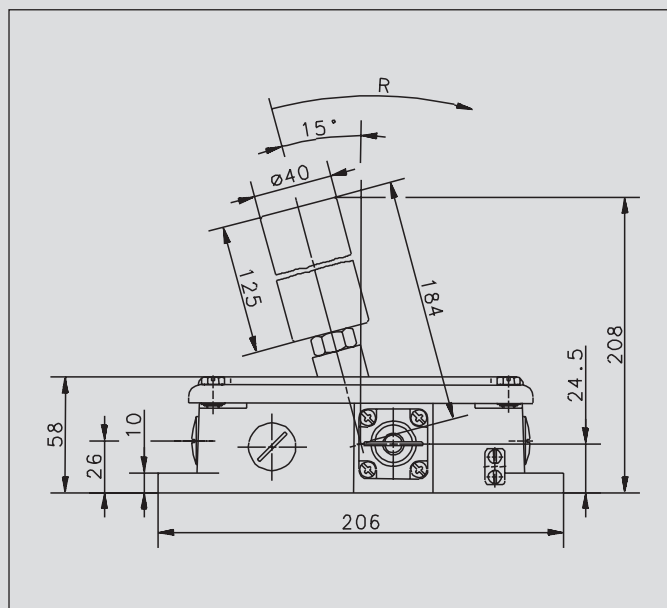
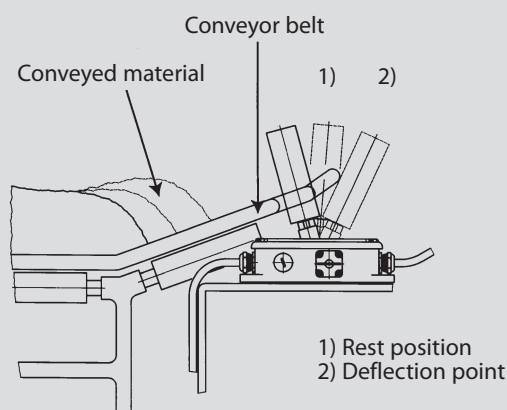


Metal-enclosed belt alignment switches for monitoring conveyor belts

In conveyor belt applications, the safety switch prevents conveyor belts from being damaged or being destroyed as the result of the belt running off track. When the roller lever is deflected by a conveyor belt running off track the safety contacts in the switch engage, thus shutting down the conveyor belt.


Only after eliminating the cause of the malfunction can the system be restarted by means of the pull release (key ring).

The roller lever is mounted in ball bearings. The cast iron enclosure has three M20 x 1.5 cable entries ready for through-wiring. The belt alignment switch is equipped with 2 normally-open contacts and 2 positive opening NC contacts (⊖). Thanks to its sturdy design, the device guarantees continuous trouble-free operation even under extreme operating conditions.



Product selection

Part number	Designation
6015736003	Si2-U2Z AW R-Rast



Technical data

Electrical data		
Rated insulation voltage	U _i max.	400 V
Rated operating voltage	U _e max.	240 V AC
Conventional thermal current	I _{the}	10 A
Utilisation category	U _e / I _e	AC-15, U _e / I _e 240 V / 3 A
Positive opening action	⤵	as per IEC/EN 60947-5-1, Addendum K
Short-circuit protection		Fuse 10 A gL/gG
Protection class		I
Mechanical data		
Enclosure		Cast iron
Cover		Cast iron
Actuation		Roller lever
Ambient temperature		- 30°C to + 80°C
Contact type		2 NC / 2 NO contact (Zb)
Resetting the lock		Pulling the keyring (< 50 N)
Mechanical service life		2 x 10 ⁶ switching cycles
Switching frequency max.		≤ 10 / min.
Mounting		4 x M8
B10d		4 mill.
Type of connection		Screw connections
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Cable entry		3 x M20 x 1.5
Weight		≈ 4.1 kg
Installation position		Any
Protection class		IP 65 conforming to IEC/EN 60529
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1		
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

1–3 Pedal Foot Switches

Tailored to your applications – the modular foot switch concept from BERNSTEIN!

BERNSTEIN offers you a wide range of foot switches to meet exacting requirements in industrial applications.

From one to three pedals in versions with or without a protective hood (UN) to prevent unintentional operation of the switch, the sturdy all-metal enclosure has a protection class of IP 65 as standard. The modular design enables you to define pedal functions with up to four switching combinations per pedal to suit your specific application.

Additional functions and equipment, in combination with the basic enclosures and switching elements, open up further control and function variants up to BG (operational health and safety)-approved foot switches with and without mechanical latching.

The respective designation precisely describes the function of the BERNSTEIN foot switches.

1 Type

Example:
F1, F2, F3

2 Number and type of contact elements

Specified from right to left for multi-pedal switches.

Example: **F3-U1/SU1/U2**

3 Number and type of contact elements

These features are denoted in the type designation directly after the corresponding switching element.

Example with latching and pressure point: **F3-U1/SU1 Y/U2 D**



Fig. 1

Three basic enclosures

The range of foot switches comprises:

- Three basic enclosures of the same length and height with different width dimensions for one (F1), two (F2) and three (F3) pedals

Cover panel or protective hood

The aluminium enclosures can be optionally equipped with an aluminium cover panel or a protective hood (UN).

Protective hood UN for F1/F2/F3/FH

The aluminium pressure die-cast protective hood (F3: aluminium sand casting) fully shields the pedal at the top and sides while the wide base provides a high degree of stability. It reliably prevents accidental operation from above by falling objects or careless operation from the side.

The interior of the cover is prepared ready to accommodate additional elements:

- Emergency stop button
- Contactor on standard mounting rail as main power switch
- Customer-specific built-in equipment

Mounting holes, rubber feet and separators

The mounting holes make it possible to anchor the foot switch to the floor.

Each foot switch is equipped with four rubber feet to prevent it slipping.

The separators on multi-pedal foot switches prevent several pedals being inadvertently operated simultaneously (version without separators available on request).

Type F1–F3 foot pedals are made from a thermoplastic material.

Switching function U1Z, SU1Z, A2Z, ...

Depending on the application, momentary-contact or snap-action systems from the BERNSTEIN modular system can be used individually or as a combination. Potentiometer (RG) versions are available for control applications.

Latch-action switching Y

After initially pressing the pedal, the switch setting is retained even after the pedal is released. The contact is not interrupted before the pedal is pressed again (bistable).

Pressure point D

(Fig. 2)

Momentary-contact switching with pressure point using two built-in elements with different lead settings.

- Pedal pressed up to pressure point: Switching position for first contact element
- Pedal pressed as far as it will go beyond the pressure point: Switching point for second contact element, the first contact element remains switched on.

Switching element with controller output RG

An integrated potentiometer enables infinitely variable control tasks to be performed via a controller output corresponding to the pedal position. A microswitch is additionally activated to provide potential isolation when at rest or in end position. Provisions are made for two microswitches for rest and end position deactivation. The standard potentiometer has a rating of 10 Ω/0.5 W. Other types on request.



Fig. 2

Emergency Stop impact button NA (Fig. 3)

Since the foot switch is often used in locations other than on the actual machines or systems, an Emergency Stop impact button is directly available to the operator on the command unit.

Power contactor LS

To accommodate analytical applications it is necessary to combine an auxiliary power switch with a main power switch. In line with the cost-effective design and to enable wiring without the need for an additional switch box, this version features a contactor mounted directly on a standard mounting rail in the hooded enclosure.

Hinged protective hood UK for F1

The cast aluminium protective hood UK, which must be raised with the foot before the pedals can be operated, is optionally available for the F1 enclosure to provide protection against falling objects and inadvertent pedal operation.

Pedal lock AT for F1/F2/F3 (Fig. 4)

The pedal cannot be operated before the locking lever is released with the foot. This prevents inadvertent actuation of the pedals even in the event of strong vibration / shaking caused by incorrect handling.

Footrest FST for F1/F2/F3

Applying effective workplace ergonomics to establish the right foot position (heel) is invaluable in prolonged working procedures. The wedge-shape prevents inadvertent operation.

The cast aluminium footrest can also be used under the harshest environmental conditions and, with corresponding inter-linking and screw connections, it can be used together with all types of foot switch. Approved by the Swedish Accident Prevention Commission.

Enclosure specifications (on request)

- Paint finish to customer specification
- Colour of pedals
- Customer logos are possible on the UN protective hood and / or pedal
- Screen print / colour on cover with pedal function or logo
- Enclosure without separators for simultaneous pedal operation
- Additional elements with wider pedals, e.g. On / Off button in pedal or in UN protective hood
- Complete units with cable / plug connection

Ex versions

Complete units with corresponding approvals are available (see ATEX).

Foot switch in AP

Versions are illustrated in the Medical Technology catalogue

Safety foot switch

Safety lock with manual release

1 Pedal pressed up to pressure point (Fig. 6):

The make contact is closed and the work process is started.

2 Pedal pressed beyond resistance of the pressure point in an emergency situation (Fig. 6):

The make contact is interrupted and locked, the work process is interrupted. In this phase the lock remains in the Off position even when the pedal is not pressed. This reliably prevents uncontrolled restart of the machine or moving parts.

3 Release:

Only after the hazardous situation has been remedied does manual release (pushbutton on the side of the enclosure) release the contacts again and the work process can be restarted by pressing the pedal as far as the pressure point.

Types with one-channel and two-channel safety function are available.

NC	Normally-closed contact
NO	Normally-open contact
W	Changeover contact
M	Signalling contact
SiPf	Safety function on foot switches with mechanical lock



Fig. 3



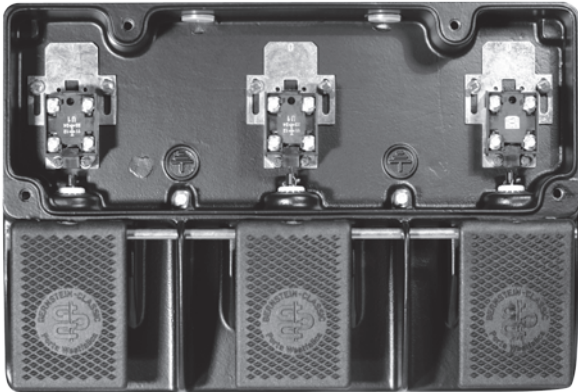
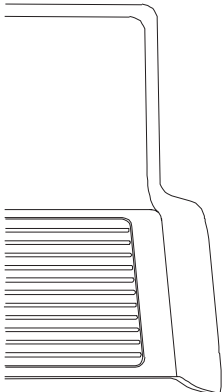
Fig. 4

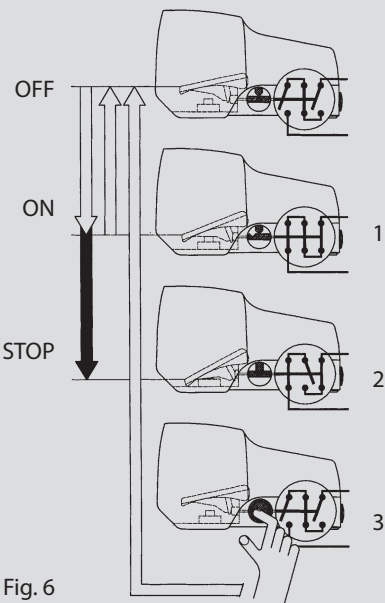


Fig. 5

1-3 Pedal Foot Switches

Ordering Instructions

Type	Pedal 1		Pedal 2		Pedal 3		Additional equipment
F1	-	Switching element Additional function					Equipment
F2	-	Switching element Additional function	Switching element Additional function				Equipment
F3	-	Switching element Additional function	Switching element Additional function		Switching element Additional function		Equipment
Example							
							
F3	-	U1	SU1 Y		U2 D		UN



Description of safety function on foot switches with mechanical lock

Technical data

Electrical data		
Rated insulation voltage	U _i max.	400 V AC
Rated operating voltage	U _e max.	240 V
Conventional thermal current	I _{the}	10 A
Utilisation category	AC-15, U _e /I _e 240 V / 3 A	
Mechanical data		
Switching frequency		max. 50/min.
Mechanical service life	Off-On (-Off) Off-On-Stop-Off	10 x 10 ⁶ switching cycles 1 x 10 ⁶
B10d		On request
Short-circuit protection		Fuse 10 A gL/gG (Slow-action contacts) Fuse 2 A gL/gG (Snap-action contacts)
Protection class		I
Ambient temperature		– 30 °C to + 80 °C
Protection class		IP 65 conforming to IEC/EN 60529
Type of connection		Contact screws
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²
Enclosure		AL
Standards		
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1		

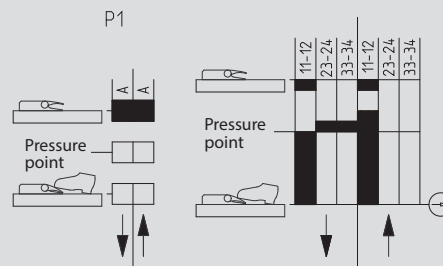
First DGUV approved enable foot switch

The BERNSTEIN three-stage-enable foot switch combines robust design and advanced technology. With many years of experience and expertise, BERNSTEIN is the preferred partner for industrial foot switches in industrial applications. Through the development of the first approved enable foot switch, BERNSTEIN succeeded again to convert this experience and expertise into customer value and to set new standards in safety technology.

The enable foot switch provides two enable contacts and one signalling contact and is available with or without latch. If the pedal is pressed up to pressure point, the two enable contacts are closed. If the pedal is released,

the enable contacts are open again. If the pedal is pressed up to the pressure point, the enable positive opening action contacts are opened. For the application of an enable device, the rules DIN EN ISO 12100 and DIN EN 60204-1 apply.

Switching diagram with optional PNP sensor



Example of a switching diagram with static position monitoring in position 1

Thanks to this signalling contact, a dynamic position detection is possible. Alternatively, a static position detection can be realised by means of a PNP sensor. It is thus possible to determine the actuation position one - the OFF position of the enable contacts (the actuator is not pressed) - or the position three - the OFF position of the operating contacts (the actuator is fully pressed).

The approved enable foot switch is only available with cover.

Mobility handling for foot switches

The mobility handle option is a complementary accessory for the one (F1) and two (F2) pedal versions. Modification to the foot switch is not required and can be retrofitted.



Fig. 7



Fig. 9

Foot switch with controller output (analogue output)

This version of foot switch has a variable controlling current and voltage output that is directly proportional to the pedal position. A teachable signalling output is additionally activated if a certain pedal position which has been adjusted before has been reached. The analogue output can be delivered in a 0–5 V, 0–10 V, 0–20 mA or 4–20 mA version. The foot switch is available in single pedal version. Two and three pedal versions on request.

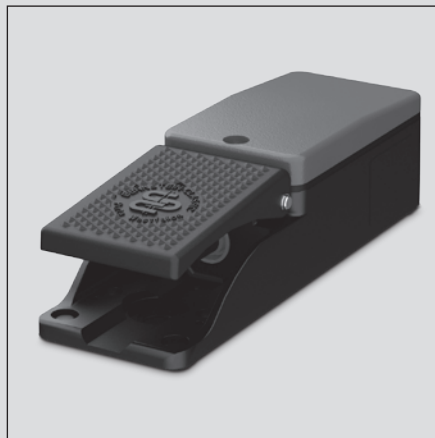


Fig. 8

1–3 Pedal Foot Switches

Product selection

F1 Snap-action contacts

Article number	Designation	Switching contacts Pedal 1	Pressure point Pedal 1	Protective hood	Special feature
6061300011	F1-SU1Z	1NC/1NO	–	–	–
6061400061	F1-SU2Z	2NC/2NO	–	–	–
6161400493	F1-SU2ZD	2NC/2NO	30 N	–	–
6061800012	F1-SU1Z UN	1NC/1NO	–	UN	–
6161800073	F1-SU1ZD UN	1NC/1NO	200 N	UN	–
6061900062	F1-SU2Z UN	2NC/2NO	–	UN	–
6061900433	F1-SU2ZD UN	2NC/2NO	200 N	UN	–
6161000487	F1-SU3 UN	3NC/3NO	–	UN	–

F1 Slow-action contacts

Article number	Designation	Switching contacts Pedal 1	Pressure point Pedal 1	Protective hood	Special feature
6061100005	F1-U1Z	1NC/1NO	–	–	–
6061200003	F1-U2Z	2NC/2NO	–	–	–
6061200007	F1-U2ZD	2NC/2NO	200 N	–	–
6061600006	F1-U1Z UN	1NC/1NO	–	UN	–
6061600010	F1-U1ZD UN	1NC/1NO	200 N	UN	–
6061700004	F1-U2Z UN	2NC/2NO	–	UN	–
6061700008	F1-U2ZD UN	2NC/2NO	200 N	UN	–

F1 with additional functions

Article number	Designation	Switching contacts Pedal 1	Pressure point Pedal 1	Protective hood	Special feature
6161000306	F1-SU1ZDA 1Z UN	1M/SiPf	460 N	UN	Latching
6161000316	F1-SU1Z/UV1ZD	SiPf	460 N	–	Latching, side sealed cable gland
6161000203	F1-SU1Z/UV1ZD UN	SiPf	200 N	UN	Latching, side sealed cable gland
6161000443	F1-UV1Z/UV1ZD	2SiPf	200 N	–	Latching, side sealed cable gland
6161100554	F1-U1Z AT	1NC/1NO	–	–	Pedal lock
6161800482	F1-SU1Z AT UN	1NC/1NO	–	UN	Pedal lock
6161700483	F1-U2Z AT UN	2NC/2NO	–	UN	Pedal lock
6061100001	F1-U1Y	1NC/1NO	–	–	Bistable
6161000676	F1-A2 Y	2NC	–	–	Bistable
6161800247	F1-SU1Y UN	1NC/1NO	–	UN	Bistable
6061800436	F1-SU1Z-LS22-UN	1NC/1NO	–	UN	Power contactor
6061800439	F1-SU1Y-LS22-UN	1NC/1NO	–	UN	Bistable and integrated power contactor
6061600435	F1-U1Z NA2 UN	1NC/1NO	–	UN	Emergency Stop button in cover
6161700091	F1-U2Z UN FST	2NC/2NO	–	UN	Footrest
6161300327	F1-SU1 MI RG 10K2W	1W	–	–	Potentiometer 10K2W
6161800662	F1-SU1 MI RG 5K0.5W UN	1W	–	UN	Potentiometer 5K0,5W
6161800645	F1-SU1 MI RG 10K0.5W UN	1W	–	UN	Potentiometer 10K0,5W

Enable foot switch F1

Article number	Designation	Switching contacts Pedal 1	Pressure point Pedal 1	Protective hood	Special feature
6061500559	F1-ZSD	1NC / 2NO	200 N	–	Pressure point D
6061500567	F1-ZSDR	1NC / 2NO	200 N	–	Pressure point D, Latching R
6061500569	F1-ZSP1D	1NC / 2NO	200 N	–	Additional board 1*, Pressure point D
6061500570	F1-ZSP3D	1NC / 2NO	200 N	–	Additional board 3**, Pressure point D

Slow-action and snap-action contacts are mixed in the special type table. The snap-action contacts are identified by the S in the contact element designation (e.g. SU1)!
 * Additional board PNP for determination of switching position 1 ** Additional board PNP for determination of switching position 3

F1 Foot switch with controller output

Article number	Designation
6161500723	F1-AU0-5
6161500724	F1-AU0-10
6161500725	F1-AI0-20
6161500726	F1-AI4-20

Article number	Designation	Special feature
6161000727	F1-AU0-5 UN	Prot. shroud UN
6161000728	F1-AU0-10 UN	Prot. shroud UN
6161000729	F1-AI0-20 UN	Prot. shroud UN
6161000730	F1-AI4-20 UN	Prot. shroud UN

Mobility handling for foot switches

Article number	Designation
3996000229	F1-TV
3996000230	F2-TV

Product selection

F2 Snap-action contacts

Article number	Designation	Switching contacts		Pressure point		Protective hood	Special feature
		Pedal 1	Pedal 2	Pedal 1	Pedal 2		
6062330021	F2-SU1Z/SU1Z	1NC/1NO	1NC/1NO	–	–	–	–
6062440065	F2-SU2Z/SU2Z	2NC/2NO	2NC/2NO	–	–	–	–
6062830022	F2-SU1Z/SU1Z UN	1NC/1NO	1NC/1NO	–	–	UN	–
6162000418	F2-SU1Z/SU2ZD UN	1NC/1NO	2NC/2NO	–	460 N	UN	–
6062830417	F2-SU1ZD/SU1ZD UN	1NC/1NO	1NC/1NO	200 N	200 N	UN	–
6062940066	F2-SU2Z/SU2Z UN	2NC/2NO	2NC/2NO	–	–	UN	–
6162000503	F2-SU4ZD/SU4ZD UN	4NC/4NO	4NC/4NO	200 N	200 N	UN	–

F2 Slow-action contacts

Article number	Designation	Switching contacts		Pressure point		Protective hood	Special feature
		Pedal 1	Pedal 2	Pedal 1	Pedal 2		
6062110013	F2-U1Z/U1Z	1NC/1NO	1NC/1NO	–	–	–	–
6062220015	F2-U2Z/U2Z	2NC/2NO	2NC/2NO	–	–	–	–
6062220019	F2-U2ZD/U2ZD	2NC/2NO	2NC/2NO	200 N	200 N	–	–
6062610014	F2-U1Z/U1Z UN	1NC/1NO	1NC/1NO	–	–	UN	–
6162610253	F2-U1ZD/U1Z UN	1NC/1NO	1NC/1NO	140 N	–	UN	–
6062620086	F2-U1Z/U2ZD UN	1NC/1NO	2NC/2NO	–	200 N	UN	–
6162720675	F2-U2Z/U1Z UN	2NC/2NO	1NC/1NO	–	–	UN	–
6062710376	F2-U2ZD/U1Z UN	2NC/2NO	1NC/1NO	200 N	–	UN	–
6062720016	F2-U2Z/U2Z UN	2NC/2NO	2NC/2NO	–	–	UN	–
6062720020	F2-U2ZD/U2ZD UN	2NC/2NO	2NC/2NO	200 N	200 N	UN	–
6162000651	F2-SU1ZA2ZD/SU1Z UN	3NC/1NO	1NC/1NO	460 N	–	UN	–

F2 with additional functions

Article number	Designation	Switching contacts		Pressure point		Protective hood	Special feature
		Pedal 1	Pedal 2	Pedal 1	Pedal 2		
6162000486	F2-SU1ZUV1ZD/SU1Z UN	1M/ SiPf	1NC/1NO	460 N	–	UN	Safety lock, pedal 1
6162000364	F2-SU1ZSU1ZD/SU1Z UN	2 SiPf	1NC/1NO	200 N	–	UN	Safety lock, pedal 1
6162000338	F2-SU1ZUV1D/SU1ZUV1D UN	SiPf	SiPf	200 N	200 N	UN	Safety lock, pedal 1 and 2
6162000583	F2-UV1ZD/UV1ZD UN RAST	SiPf	SiPf	200 N	200 N	UN	Safety lock, pedal 1 and 2, 2-piece
6062610047	F2-U1Y/U1Z UN	1NC/1NO	1NC/1NO	–	–	UN	Bistable, pedal 1
6162840655	F2-SU1Y/SU2Z UN	1NC/1NO	2NC/2NO	–	–	UN	Bistable, pedal 1
6062610018	F2-U1Y/U1Y UN	1NC/1NO	1NC/1NO	–	–	UN	Bistable, pedal 1 and 2
6162720623	F2-U2ZAT/U2Z UN	2NC/2NO	2NC/2NO	–	–	UN	Pedal lock pedal 1
6162830500	F2-SU1ZAT/SU1ZAT UN	1NC/1NO	1NC/1NO	–	–	UN	Pedal lock pedal 1 und 2
6162720700	F2-U2Z/U2Z NA2 UN	2NC/2NO	2NC/2NO	–	–	UN	Emergency Stop button in cover
6162630452	F2-U2Z/SU1MIRG UN	2Ö/2NO	1NC/1NO	–	–	UN	10K potentiometer on pedal 2
6162610578	F2-U1D ÜBERHUB/U1Z UN	1NC/1NO	1NC/1NO	200 N	–	UN	Extended stroke, 1
6162830680	F2-SU1D ÜBERHUB/SU1D ÜBERH UN	1NC/1NO	1NC/1NO	200 N	200 N	UN	Extended stroke, 1 and 2

Enable foot switch F2

Article number	Designation	Switching contacts		Pressure point		Protective hood	Special feature
		Pedal 1 (left)	Pedal 2 (right)	Pedal 1 (left)	Pedal 2 (right)		
6062500561	F2-U1Z/ZSD	1NC / 1NO	1NC / 2NO	–	200 N	–	Pressure point D (Pedal 2)
6062500568	F2-ZSDR/ZSDR	1NC / 2NO	1NC / 2NO	200 N	200 N	–	Pressure point D, Latching R

Slow-action and snap-action contacts are mixed in the special type table. The snap-action contacts are identified by the S in the contact element designation (e.g. SU1)!


1–3 Pedal Foot Switches

Product selection


F3 Slow-action contacts

Article number	Designation	Switching contacts			Pressure point			Protective hood	Special feature
		Pedal 1	Pedal 2	Pedal 3	Pedal 1	Pedal 2	Pedal 3		
6063833045	F3-SU1Z/SU1Z/SU1Z UN	1NC/1NO	1NC/1NO	1NC/1NO	–	–	–	UN	–
6163015473	F3-SU1ZUV1D/U1/SU1Z UN	1NC/2NO	1NC/1NO	1NC/1NO	200 N	–	200 N	UN	–
6063111025	F3-U1Z/U1Z/U1Z	1NC/1NO	1NC/1NO	1NC/1NO	–	–	–	–	–
6063611026	F3-U1Z/U1Z/U1Z UN	1NC/1NO	1NC/1NO	1NC/1NO	–	–	–	UN	–
6063612423	F3-U1Z/U1Z/U2Z UN	1NC/1NO	1NC/1NO	2NC/2NO	–	–	200 N	UN	–
6063721262	F3-U2ZD/U2ZD/U1Z UN	2NC/2NO	2NC/2NO	1NC/1NO	200 N	200 N	–	UN	–
6063722171	F3-U2ZD/U2ZD/U2ZD UN	2NC/2NO	2NC/2NO	2NC/2NO	200 N	200 N	200 N	UN	–

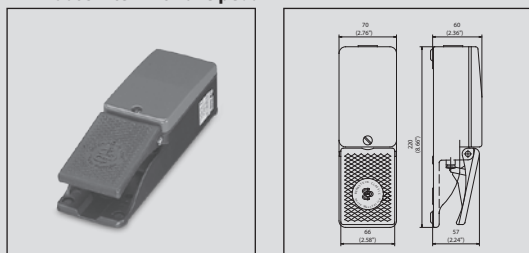
F1 – Foot switch with one pedal



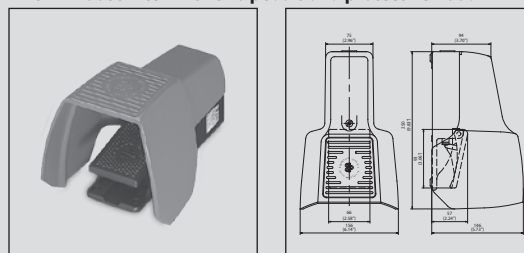
F1 UN – Foot switch with two pedals and protective hood




F2 – Foot switch with two pedals

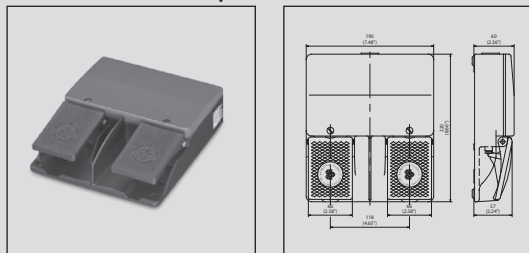

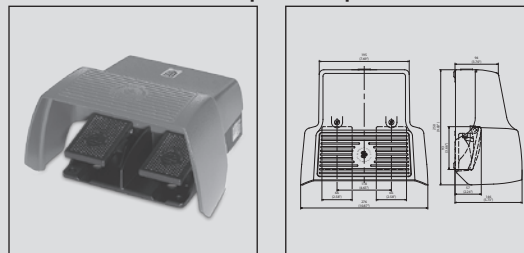
F2 UN – Foot switch with two pedals and protective hood



F3 – Foot switch with three pedals

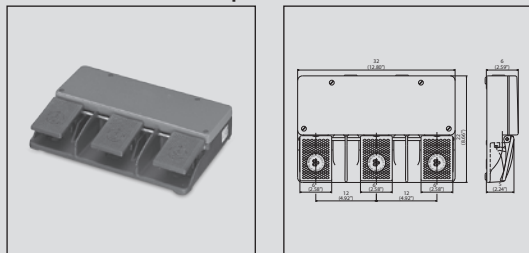

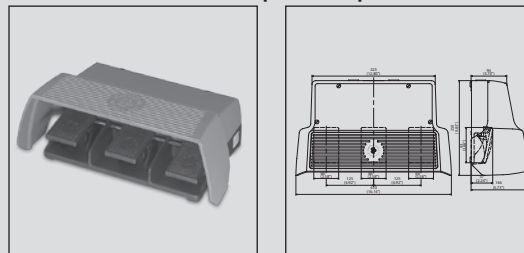F3 UN – Foot switch with three pedals and protective hood







Please find our wide range of foot switches in our new brochure.

Complete Range

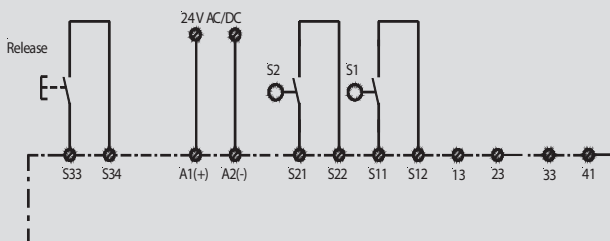
SCR – Safety Relay




Whether it's safety switches or safety relays, BERNSTEIN has the complete range of products for your application. Our SCR safety relays are used to reliably evaluate signals, such as those generated by BERNSTEIN position switches, safety switches, safety latching devices, safety rope pull switches, safety sensors or 2-hand controllers.

With their compact standard mounting rail enclosure, BERNSTEIN SCR relays impress in a wide variety of applications up to performance level e as defined by EN 13849. Conforming to this standard, the SCR relays monitor the correct position and reliable operation of safety sensors and or contacts in safety switches. This evaluation function is used to actuate power elements such as power contactors or frequency converters and stop machines in the case of emergency.

Two positive opening normally-closed contacts are required as the signalling contacts for safety gate monitors. Virtually all BERNSTEIN switches feature these contacts. They can be identified by the  symbol.



Schematic representation of safety relay system

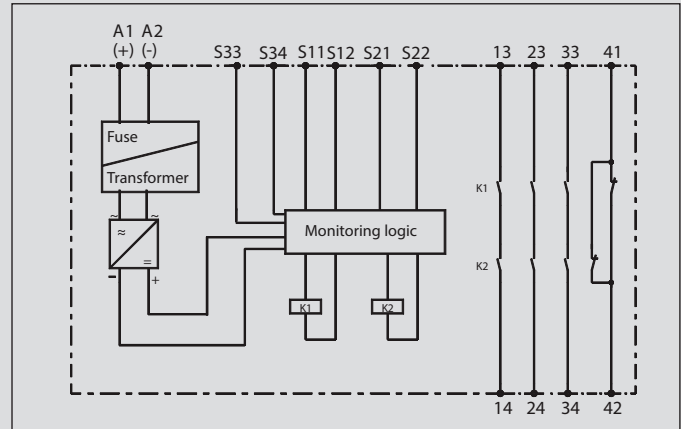

The product range includes switching relays for evaluating:

- Safety gate monitors with and without monitored start pushbutton
- Expansion module as auxiliary switching circuit for safety relays
- Two-hand controllers
- Auxiliary controller for safety light curtains/barriers



Technical data

Electrical data		
Supply voltage	U _e	24 V AC/DC (6075111020 24V DC)
Voltage range		0,90 ... 1,1 U _e
Frequency		50 ... 60 Hz
Power intake		24 V DC: 3 W, 24 V AC: 5 V A
Performance data		
Conductor cross section		2 x 1.5 mm ² / 4 x 1.5 mm ²
Contact data		
Switching voltage		230 V AC, 24 V DC
Switching current		5 A
Max. switching power		1250 V A (ohmic load)
Mechanical service life		107 switching cycles
Environmental data		
Ambient temperature		– 25 °C to + 50 °C
Protection class, enclosure		IP 40 DIN VDE 0470 Part 1
Protection class, terminals		IP 20 DIN VDE 0470 Part 1
Mechanical data		
Enclosure material		Polyamide PA 6.6
Approvals		
TÜV, UL, C-UL		

Product selection

Article number	Designation	Enable current paths (NO contact)	Signalling contact (NC contact)	Signalling contact (NC contact)	Monitored start	Start automatic/ pushbutton (manual)	Remarks
6075111009	SCR4-W22-3.5-D	e	3	1	No	Auto / pushbutton	–
6075111010	SCR4-W22-3.5-SD	e	3	1	Yes	Pushbutton	–
6075111015	SCR2-W22-2.5	d	2	0	No	Auto / pushbutton	–
6075111016	SCR2-W22-2.5-S	d	2	0	No	Pushbutton	–
6075111018	SCR4-W22-2.6-D2H	e	2	1	–	–	SCT for two-hand controller
6075111020	SCR ON4-W22-3.6-S	e	3	0	Programmable	Pushbutton	Evaluation device for electro-sensitive protective equipment

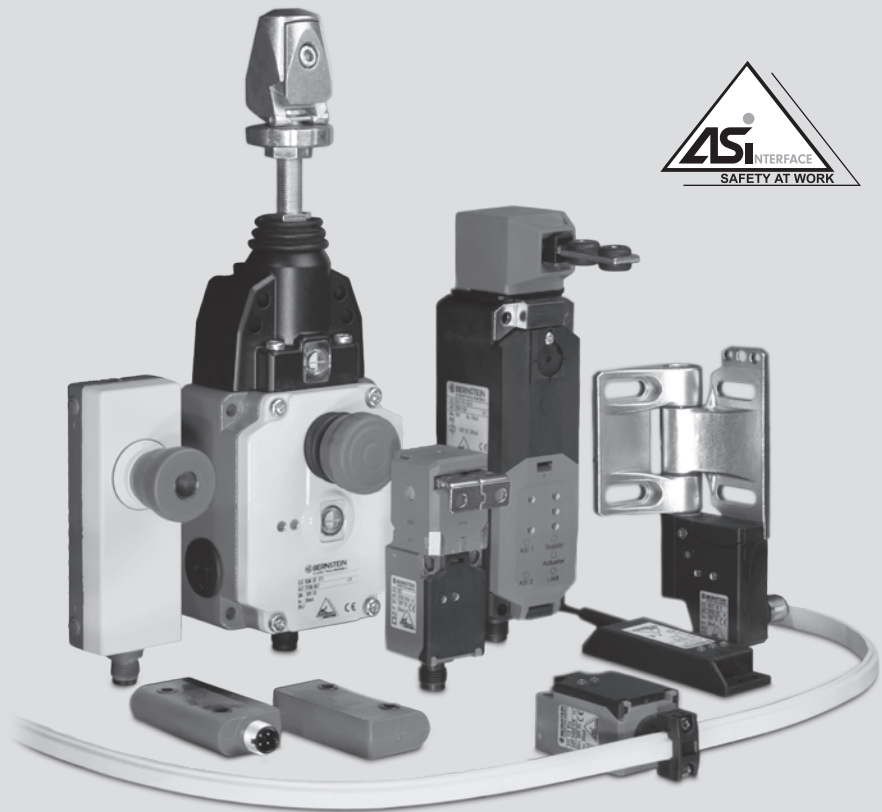
AS Interface – Safety at Work

The resounding success of the AS interface (actuator-sensor interface) that operates in accordance with the master-slave principle is attributed by its complete ease of use, its ability to be specifically adapted to the simplest elements in machine and system construction as well as the host of unparalleled application advantages it offers. The AS interface is particularly advantageous against the backdrop of the need to conform to the Machinery Directive 2006/42/EC since 29.12.2009. Performance level e and SIL 3 are achieved effortlessly. It is not always possible to set up safety systems with safety switches connected in series while conforming to EN 13849-1. Such configurations present no problems for the AS interface which provides effective solutions up to the highest performance level.

The unshielded two-wire line that carries data and power renders intricate parallel wiring between sensors and controller unnecessary, thus offering a considerably expanded range of functionality while reducing costs. With piercing technology corresponding field devices, i.e. up to 62 standard / 31 safety devices or a mixed configuration, can be connected using the plug&play principle in any position on the yellow, two-core cable. The AS interface master, acting as an independent gateway to higher bus systems (e.g. Profibus), monitors the bus and cyclically polls the bus users.

As an open-ended standard, AS interface guarantees maximum compatibility while providing significant benefits in terms of overall cost considerations. These benefits are reflected in the substantial time and cost savings achieved for initial installation, retrofitting, converting and maintaining systems as well as significantly reducing hardware outlay.

The safety monitor makes the AS interface into a safety bus. It monitors communication between the slaves and the master. The safety monitor shuts down up to 16 enable circuits as soon as it detects that a safety slave has switched or identifies a fault. A safety-oriented system can be built up by installing a safety monitor and corresponding slaves in an existing AS interface system.



The safety-oriented application is created using the ASIMON program and loaded into the monitor. Programming is carried out by means of simple drag and drop.

AS interface – from under one roof

All plastic-enclosed safety switches are available in the Safety at Work configuration and other products from the switch range are constantly being equipped with this functionality. With the SHS3, BERNSTEIN offers the first safety hinge switch with AS interface capabilities on the market. Integrated AS interfaces ensure BERNSTEIN components are designed with the smallest possible dimensions. For instance, the mini limit switch Ti2 is the only switch in its class on the market with AS interface capabilities. The safety switch with interlock (SLK) is, of course, also equipped with an AS interface. In addition to switches, gateway masters and terminal boxes, the BERNSTEIN product range also includes power supply units, safety monitors, hand-held programming units as well as an extensive assortment of accessories. The entire comprehensive spectrum makes it possible to offer complete systems solutions.

Master with gateways to following bus systems are available:

- Profibus
- Profinet
- Ethernet
- Powerlink
- EtherCat
- CanOpen
- DeviceNet
- Modbus
- Allen-Bradley ControlLogix

Quick-Connect Technology



Direct connection of AS interface shaped cable to BERNSTEIN AS interface switch.

The combination of the AS interface cable with ribbon cable terminals and M12 connecting lines guarantees enormous time-saving potentials in installation and connection.

This principle is supported by the direct connection technology of BERNSTEIN AS interface switches. These BERNSTEIN AS interface switches are connected directly to the AS interface cable by means of integrated ribbon cable terminals.

The use of the AS interface cable together with piercing technology ensures the ribbon cable terminal can be easily repositioned while retaining the cable's protection class.

Installation advantages

- Reduced installation time
- Easy installation thanks to piercing technology (in ribbon cables protected against polarity reversal)
- Safety circuits can be retrofitted and converted by simply plugging in individual slaves
- Changes to safety systems can be quickly implemented by way of software
- Reduced cable requirements, consequently:
 - Small trailing cables
 - Small cable platforms
 - Easy to clean
 - Low fire load
- No terminal boxes
- No need to prepare enclosures, terminals and screw connections

Planning advantages

- Straightforward planning – intricate wiring documents are replaced by clearly arranged bus structure diagrams
 - Safety functions quickly created by drag and drop in ASIMON
 - Printout of safety configuration from programming tool

System advantages

- Uncomplicated interconnection of safety systems in machines used in production lines
- Straightforward implementation of safety system cascading
- Faults in the safety system can be diagnosed with a laptop online
- Diagnostic facilities directly at the master and monitor for exact fault location
- System data / polling can be read out via higher-level bus system: Remote servicing
- Fewer I/Os at controller
- Takes up less space in control cabinet

Economic advantages

- Reduced costs through:
 - Significant reduction in cables
 - Faster installation
 - Fewer circuit diagrams need to be created
 - Faster commissioning
 - Fast troubleshooting
 - Extensive diagnostic facilities

User advantages through reduced:

- Machine downtimes thanks to extensive diagnosis and fast troubleshooting
- Commissioning costs
- Maintenance and servicing expenditure

Further advantages




- Direct connection – no need for M12 connection cable and connection adapters
- Great degrees of freedom in terms of network typology
- Tough even in harsh working environments
- Modularity and perfect integration in higher-level bus systems – an AS interface master can be integrated as a normal slave in a higher-level bus system

Technical data (for all slaves, except coupling box)






Electrical data					
Voltage range	U	26.6 ... 31.6 V; via AS interface with polarity reversal pprotection			
Power intake	I	< 30 mA			
AS interface specification		Profile S-0.B			
		IO-Code:	0 x 0	ID-Code:	0 x B
		IO-Code1:	0 x F	ID-Code2:	0 x E
AS interface inputs		Contact 1:	Data bits D0/D1 = static 00 or dynamic code transfer		
		Contact 2:	Data bits D2/D3 = static 00 or dynamic code transfer		
Parameter bits		No function			
Mechanical data					
Display		LEDs for indicating status of ASI slave and bus			
Contact type		2 NC (Slow-action contact, Zb)			
Type of connection		Connector M12 male			
Plug assignment 1		1: AS-i +	2: free		
		3: AS-i –	4: free		
Installation position		Any			
Protection class		IP 65 conforming to EN 60529; DIN VDE 0470 T1			
Performance Level					
PL	Conforming to 13849-1 Up to e				
Standards					
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1 EN 50295, EN ISO 13849-1					

Please refer to the corresponding standard product for further technical data.








AS-i Slaves

Contactless safety sensors			
Transponder technology		Type 4 according to ISO 14119	
	CSMS RFID High coded / Uni-coded 6073200093 ASI-CSMS-M-H-ST 6073200094 ASI-CSMS-S-H 6073200095 ASI-CSMS-SET-H-ST Low coded / Multi-coded 6073200096 ASI-CSMS-M-L-ST 6073200097 ASI-CSMS-S-L 6073200098 ASI-CSMS-SET-L-ST	● Safety slave ● Dynamically coded signal transmission ● Tamperproof operation ● Switching status and function reserve indicator ● AS-i status display ● Suitable for harsh environments ● M12 connector ● Non-contact operation gives superior life expectancy ● Switching distance 15 mm	
	 Spacer (CSMS Accessories) 6073900070 CSMS Spacer 8 mm 6073900090 CSMS Spacer ITEM 8 mm	● Spacer 8 mm ● Material: Plexiglas GS colourless ● For installing the CSMS on metal bases	
Magnetic technology		Type 4 according to ISO 14119	
	CSMS Reed 6073200071 AS-i CSMS-R-M-ST 6073200072 AS-i CSMS-R-S 6073200077 AS-i CSMS-R-SET	● Sicherheits-Slave ● Low coded according to ISO 14119 ● Schaltzustandsanzeige ● AS-i Status Anzeige ● Verdeckter Einbau möglich ● Unempfindlich gegen Verschmutzung ● Hohe Lebensdauer, da kein mechanischer Verschleiß ● M12 Anschluss	
	 MAK 52 Sensor 6073200068 AS-i MAK 52 Actuator 6402052307 TK-52-CD/2	● Safety slave ● Low coded according to ISO 14119 ● Switching status indicator ● AS-i status display ● Suitable for concealed installation ● Suitable for harsh environments ● Non-contact operation gives superior life expectancy	
	MAK 42 Sensor 6073200067 AS-i MAK 42 Actuator 6402042053 TK-42-CD/2	● Safety slave ● Low coded according to ISO 14119 ● Switching status indicator ● AS-i status display ● Suitable for concealed installation ● Suitable for harsh environments ● Non-contact operation gives superior life expectancy	
	 MAK 53 Sensor 6073200091 AS-i MAK 53 6073200092 AS-i MAK 53 ST Actuator 6402043064 TK-43-CD/2 (plastic) 6408043065 TN-43-CD/2 (stainless steel)	● Safety slave ● Low coded according to ISO 14119 ● Switching status indicator ● AS-i status display ● Suitable for concealed installation ● Suitable for harsh environments ● Non-contact operation gives superior life expectancy	

AS-i Slaves

Safety Hinge Switch		Type 1 according to ISO 14119	
	SHS3 Stainless steel hinge: 6073200011 AS-i SHS3 SA R 6073200013 AS-i SHS3 SR R Die-cast zinc hinge: 6073200081 AS-i SHS3Z SA R 6073200082 AS-i SHS3Z SR R	● Safety slave ● Hinge Switch ● AS-i status display ● Switching point freely adjustable by user over a range of 270° ● Fine adjustment +/- 1,5° ● Freely and repeatedly adjustable switching point ● Stainless steel or die-cast zinc hinge	
Safety interlock (without actuator)		Type 2 according to ISO 14119	
	SLK Locking principle Spring force 6073200058 AS-i SLK-F-R1-A0-0 Locking principle Magnetic force 6073200057 AS-i SLK-M-R0-A0-0	● Safety slave ● Low coded according to ISO 14119 ● Interlock switch for safety doors and protective hoods ● Spring force (closed-circuit current) type F and magnetic force (working current) type M ● Status display for the actuating and interlock position ● The status LEDs could alternatively be switched by the control system ● AS-i status display ● Feed-in of the interlock by external power supply system	
Safety switch with separate actuator		Type 2 according to ISO 14119	
	SK 6073205050 AS-i SK F30 M 6073205028 AS-i SK M 6073205039 AS-i SK M D	● Safety slave ● Low coded according to ISO 14119 ● Safety switch with separate actuator ● AS-i status display ● Plastic housing ● Variable actuator with two actuator openings	
	SKT 6073200006 AS-i SKT 6073200029 AS-i SKT D	● Safety slave ● Low coded according to ISO 14119 ● Safety switch with separate actuator ● Slim and short switch design ● AS-i status display ● Plastic housing ● Rotary head in 90° steps ● 2 actuating entries	
	ENK VTU 6073504025 AS-i ENK VTU 6073504038 AS-i ENK VTU D	● Safety slave ● Low coded according to ISO 14119 ● Safety switch with separate actuator ● Especially robust switch design ● AS-i status display ● Plastic housing ● Rotary head in 90° steps	

AS-i Slaves

Position safety switches		Type 1 according to ISO 14119
	Ti2	- Safety slave - Smallest switch with integrated AS Safety at Work interface - AS-i status display - Betätiger des Standardprogramms erhältlich - Plastic housing - Fixing measures according to DIN EN 50047
	6073403020 AS-i Ti2 Hw 6073403035 AS-i Ti2 Hw D 6073402019 AS-i Ti2 RiW 6073402034 AS-i Ti2 RiW D 6073401018 AS-i Ti2 w 6073401033 AS-i Ti2 w D	
	I88	- Safety slave - Switch design according to industry standard DIN EN 50047 - AS-i status display - Actuator of the standard program available - Plastic housing
	6073303017 AS-i I88 Hw 6073303032 AS-i I88 Hw D 6073302016 AS-i I88 RiWK 6073302031 AS-i I88 RiWK D 6073301015 AS-i I88 w 6073301030 AS-i I88 w D	
	Bi2	- Safety slave - Side-positioned M12 connection - AS-i status display - Actuator of the standard program available - Plastic housing
	ENK	- Safety slave - AS-i status display - Actuator of the standard program available - Especially robust switch design - Fixing measures according to DIN EN 50041
	6073201052 AS-i Bi2 w 6073201051 AS-i Bi2 w D	
	F1	- Safety slave - Protective shroud UN - M12 connection - Other types on request
	6073700076 AS-i F1 UN	
	F1 (enabling function)	- Safety slave - Enabling function - Pressure point D - Latching R (optional) - Protective shroud UN - M12 connection - Other types on request
	6073700085 F1-ASI-ZSD UN 6073700086 F1-ASI-ZSDR UN	
Foot switches		
	F1	- Safety slave - Protective shroud UN - M12 connection - Other types on request
	6073700076 AS-i F1 UN	
	F1 (enabling function)	- Safety slave - Enabling function - Pressure point D - Latching R (optional) - Protective shroud UN - M12 connection - Other types on request
	6073700085 F1-ASI-ZSD UN 6073700086 F1-ASI-ZSDR UN	

Emergency stop switches and control elements


Emergency stop buttons, illuminated pushbuttons and indicator lamps are available in the new, elegant housing. The housing is **specially designed for 40 mm profile rails** and features a special assembly concept. It can also be used outside the profile rails of course. Start, enable and request buttons can also be connected decentrally to the AS-i system with the control elements. The status of the process can be displayed by the illuminated pushbuttons. With these AS-i solutions, the necessary functions can be placed exactly where they are needed.



Emergency stop

6073100074
AS-i EMERGENCY
STOPPING BUTTON

- Emergency stopping button with integrated safety AS-i slave
- With 30 mm emergency stopping button
- Reset via right hand rotation
- 2 coloured status display of emergency stopping button
- M12 connector




Press button / Signal lamp



Control element

6073100075
AS-i CONTROL ELEMENT

- 2 illuminated push buttons with AS-i interface slave
- 2 x 22 mm illuminated push button
- M12 connector
- 2 coloured status display per button (programmable via AS-i)



E/A module



Turning-on box

6073100027
AS-i TURNING-ON-BOX 4 IN

- AS-i Slave
- 4 digital input PNP
- Status display of inputs via LED
- AS-i status display
- Via ASI cable connectable
- Connectors M12


Safety rope-pull switch



SRM

6073200009 AS-i SRM-LU-175
6073200010 AS-i SRM-LU-300
6073200007 AS-i SRM-QF-175
6073200008 AS-i SRM-QF-300

- Safety slave
- Rope-pull switch in metal housing
- AS-i status display
- Tensioned length up to 75 meters (version 300) (37,5 meters version 175)
- Quick-Fix quick action clamping head QF available



Master / Safety Monitor / Power Supply Unit

Safety basis monitor

This safety monitor is intended for the smallest AS-i safety systems. With this safety monitor, the smallest safety applications can be implemented with AS-i, something which was previously unthinkable for cost reasons. The programming of the safety application is done quickly and simply with the Windows program ASIMON as is usual in AS-i Safety at Work.



Basis monitor

6073100073
AS-i BASIS MONITOR
6073100084
AS-i BASIS MONITOR
enhanced functions

- Integrated master
- A special power supply unit AS-i is not necessary (up to 0,5 ampere)
- Integrated safety outputs
- Integrated safety inputs
- Integrated standard inputs
- Only 22,5 mm installation width




Safety monitor




6073100089
AS-i MST PROFIBUS SMON

- 2 safety relay outputs, 2 safety semiconductors
- 4 EDM input
- PROFIBUS field bus interface
- 2 AS-i circuits
- Diagnostic and adjustments facilities via display
- Diagnostic and configuration interface
- Robust stainless steel enclosure
- 16 enable circuits
- Other types on request



6073100004
AS-i SMON B+W

- Safety monitor for 2 AS-i circuits
- 16 enable circuits
- 2 x two channel relay enable circuits in the device
- 2x EDM and 2 x start input in the device
- Display for addresses and exact fault location
- Configuration storable on chip card




Master



6073100001
AS-i MST PROFIBUS

- AS interface master with profibus slave
- AS-i master integrated
- Double address recognition
- Earth fault monitor integrated
- Display for ASI slaves addresses and exact fault location
- LEDs for status display
- Simple use with only 4 integrated buttons
- Gateways for Profisafe, Profinet, Ethernet, Powerlink, EtherCat, -CanOpen, DeviceNet, Modbus, Master for all Allen-Bradley ControlLogix available




Power supply



6073100003
AS-i NT 4A B+W

- 90 V AC up to 265 V AC multi voltage power supply unit
- 4 A primarily clocked power supply unit
- LED operating mode display
- AS-i data decoupling
- SELV



Software + USB cable



6073900079
AS-i PROG SOFTWARE

6073100078
USB CA. F. AS-i BASIS MONITOR

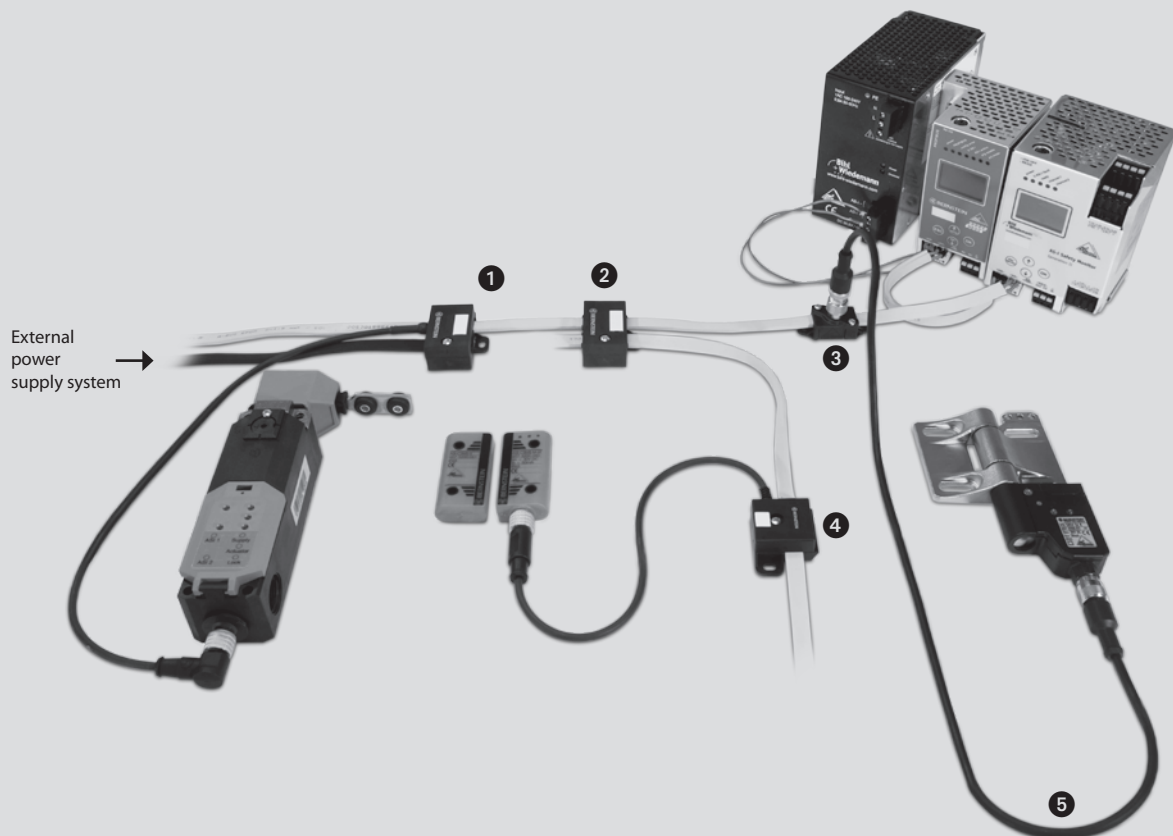
- ASIMON for programming the safety monitor
- AS-i Control Tool for addressing, diagnostic and testing of the AS-i bus system
- USB cable for connecting the basis monitor to the computer

Hand-held programming device









6073100005
AS-i HND PRG

- Addressing / Programming up to 62 slaves max.
- Display of all existing slaves in the bus system
- Reading and writing of slave datas
- LCD Display
- Rechargeable battery integrated
- Charging device is included in delivery



Accessories


Connecting module ③			
	6073900042 AS-i CONNECTING MODULE M12 SCREW	● For connecting AS-i devices on AS-i profile cable with M12 connecting line ● Codification of the M12 connector turnable over a range of 90°	
Connecting module ④			
	6073900043 AS-i CONNECTING MODULE 2M M12G 6073900087 AS-i CONNECTION MODULE 0,3M M12G	● For connecting AS-i devices on AS-i profile cable with an integrated, 2 meter long, ready-made connecting line and M12 straight connecting box ● For connecting AS-i devices on AS-i profile cable with an integrated, 0,3 meters long, ready-made connecting line and M12 straight connecting box	
Connecting module			
	6073900044 AS-i CONNECTING MODULE 2M M12W 6073900088 AS-i CONNECTION MODULE 1M M12W	● For connecting AS-i devices on AS-i profile cable with an integrated, 2 meters long, ready-made connecting line and M12 angled connecting box ● For connecting AS-i devices on AS-i profile cable with an integrated, 1 meter long, ready-made connecting line and M12 angled connecting box	
Connecting module + double ①			
	6073900045 AS-i DOUBLE CONNECTING MODULE 0,3M M12G	● For connecting AS-i devices on AS-i profile cable with an integrated, 0,3 meters long, ready-made connecting line and M12 straight connecting box	
Connecting module + double			
	6073900046 AS-i DOUBLE CONNECTING MODULE 2M M12W	● For connecting AS-i devices on AS-i profile cable with an integrated, 2 meters long, ready-made connecting line and M12 angled connecting box	

Cable bridge ②



6073900047
AS-i CABLE BRIDGE

- Branch for AS-i profile cable
- The connection under the cables is effected when opening the cover




Connecting cable ⑤



6073900048
AS-i CONNECTING C.M12 1M G/G

- Connecting cable for the connection of the ASi Slave and the connecting module
- Double-sided ready-made straight M12 connecting units (connector/socket)




Connecting cable



6073900049
AS-i CONNECTING C.M12 1M G/W

- Connecting cable for the connection of the ASi Slave and the connecting module
- Double-sided ready-made M12 connecting units, straight connector/angled socket




Yellow cable EPDM




6073900040
AS-i CABLE EPDM YELLOW

- Yellow AS-i profile cable EPDM




Black cable EPDM



6073900041
AS-i CABLE EPDM BLACK

- Black AS-i profile cable EPDM




ATEX-approved products for potentially explosive atmospheres

- Ex e, Ex ia and Ex e\ia terminal boxes made from polyester and aluminium
- Ex d / Ex tb limit switches, rope pull switches and foot switches
- Ex mb / Ex tb magnetic switches



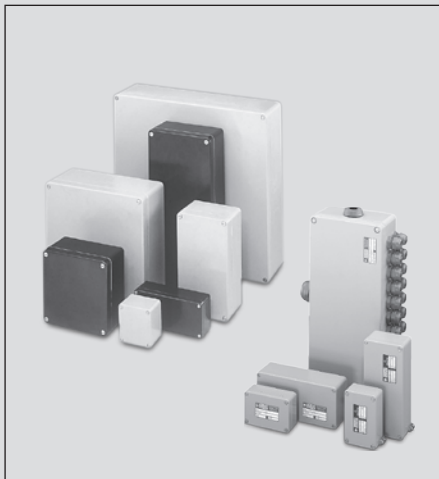Services, training, system solutions, project- and customer-specific solutions.



Terminal boxes and empty enclosures

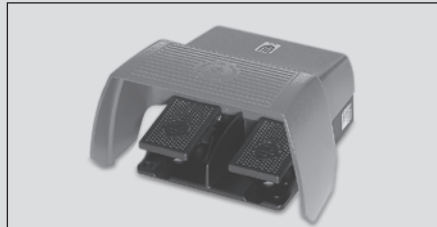
Only materials that correspond to the temperature range T6 required for Ex enclosures are used in these enclosures and components.

The minimum type of protection rating of all enclosures and screw connections is IP 64, other protection classes available on request.

The latching devices on the enclosures are optionally available as captive screw connections or quick-release fasteners.

Various CA versions are available with flange plates.

All built-in components must conform to the relevant approvals.



Momentary contact, cable pull and foot switches

An Ex d-certified switching element lies at the core of these Ex-approved switches.

It is mounted in the corresponding switch enclosures. The mechanical actuator and its installation are certified separately.

The approval of additional actuators and switch enclosures from other series is possible on request.

All switches and momentary contact switches feature one NO contact and one NC contact.



Magnetic switches

The protection against ignition energies is achieved by encapsulation.

The magnetic switches are fitted at the factory with an up to 7 m long connection cable.

The cable is permanently connected to the enclosure and is part of the approval.

All sensors are certified for a maximum surface temperature of +85 °C.

Services offered by the BERNSTEIN-ATEX experts:

- Approval of a stainless steel enclosure with freely definable dimensions
- Approvals assistance for plant operators
- Approval of switching and control elements in all enclosures
- Approval of plug-in devices in all enclosures
- Component mounting and wiring of enclosures according to customer specifications
- Training courses for planners and plant operators
- Cross-product system solutions
- Customer-specific development and project management on request
- TR (Russia) and NEC (North America) approvals on request

	II2G	Ex	ia	IIC	T6	TÜV	2008	ATEX	1234	–
Type approval to directive 94/9/EC	Application	Explosion protection	Type of protection	Device group	Temperature class	Inspection authority	Year	As per directive 94/9/EC	Consecutive number	Additional conditions
Protection Concept										
Symbol		Type of protection							Standards	
	Ex “d”	Flameproof encapsulation Switching devices, motors, transformers etc. IEC60079-1							IEC / EN 60079-1	
	Ex “p”	Pressurised encapsulation Control cabinets px = Use in Zone 1, 2 py = Use in Zone 1, 2 pz = Use in Zone 2 pb = Use in Zone 21, 22 pc = Use in Zone 22							IEC / EN 60079-2 (Gas) IEC / EN 61241-4 (Dust)	
	Ex “q”	Powder-filled encapsulation Transformers, capacitors							IEC / EN 60079-5	
	Ex “o”	Oil immersion encapsulation Transformers, load resistors							IEC / EN 60079-6	
	Ex “e”	Increased safety Terminal boxes, control cabinets, enclosures for installing devices of other protection class							IEC / EN 60079-7	
	Ex “i”	Intrinsically safe Terminal boxes, control cabinets, sensors, measurement and control equipment ia = Use in Zone 0, 1, 2, 20, 21, 22 ib = Use in Zone 1, 2, 21, 22							IEC / EN 60079-11	
		Intrinsically safe systems							IEC / EN 60079-25	
	Ex “n”	Non sparking Systems that, due to their design, cannot spark							IEC / EN 60079-15	
	Ex “m”	Encapsulation Command and signalling devices, sensors, display/indicator devices ma = Use in Zone 0, 1, 2, 20, 21, 22 mb = Use in Zone 1, 2, 21, 22							IEC / EN 60079-18	
	Ex “op”	Optical radiation op is = Intrinsically safe optical radiation op pr = Protected optical radiation op sh = Shutdown optical radiation							IEC / EN 60079-28	
	Ex „t“	Protection by enclosure Switching devices, Terminal boxes, control cabinets ta = Use in Zone 20, 21, 22 tb = Use in Zone 21, 22 tc = Use in Zone 22							IEC / EN 60079-31	
IP Protection Classes										
IP 1st digit	Contact	Foreign bodies			IP 2nd digit	Water		Max. permissible surface temperature	Temperature classes for gases	
0	No protection	No protection			0	No protection		450°	T1	
1	Large body parts	Solid object > 50 mm			1	Water dripping vertically		300°	T2	
2	Finger	Solid object > 12.5 mm			2	Water dripping at angle up to 15°		200°	T3	
3	Tool > 2.5 mm	Solid object > 2.5 mm			3	Water sprayed at an angle up to 60°		135°	T4	
4	Tool > 1 mm	Solid object > 1 mm			4	Spayed water 360°		100°	T5	
5	Complete protection	Dust accumulation			5	Hose water 360°		85°	T6	
6	Complete protection	Dust infiltration			6	Strong hose water 360°		Explosion groups for gases		
				7	Temporary submersion		Group	Typical gas	Ignition energy	
				8	Submersion		I	Methane	280 µJ	
Device group I Mining								IIA	Propane	> 180 µJ
I M1	Safety provided by 2 safety measures, 2 faults							IIB	Ethylene	60...180 µJ
I M2	Shutdown on occurrence of explosive atmosphere							IIC	Hydrogen	< 60 µJ
Device group II All potentially explosive atmospheres except mining								Explosion groups for dusts		
II 1	Zone 0	Zone 20	Safety provided by 2 safety measures, 2 faults					Group	Dust	
II 2	Zone 1	Zone 21	Safety in the event of frequent equipment malfunctions, 1 fault					IIIA	combustible flyings	
II 3	Zone 2	Zone 22	Safety in trouble-free operation					IIIB	non-conductive dust	
								IIIC	conductive dust	
Zone categories, device group II								Additional conditions		
Hazard			Gas as per IEC / EN			Dust as per IEC / EN		–	No restriction	
permanent or frequent			Zone 0			Zone 20		X	Special conditions	
occasional			Zone 1			Zone 21				
rare, temporary no longer than 30 min per year			Zone 2			Zone 22		U	Component certification Parts certification	

ATEX Products

EX versions of BERNSTEIN switches with ATEX approval are also available for applications involving potentially gas and dust explosive atmospheres.

Approvals for gas "ii G" and dust "ii D" in accordance with DIN EN 60079-XX



Make use of our Ex protection expertise for your applications.



What is ATEX?

ATEX = Explosive atmosphere (Atmosphère explosible)

The European Directive 94/4/EC governs the production and the circulation of devices and components for explosive atmospheres in the European Union. The IEC Standards harmonised throughout the EU stipulate that ATEX products approved by a certification authority can be used anywhere throughout the EU.

In most aspects the certification authorities of non-European countries such as North America, Russia etc. closely follow ATEX-relevant standards so that various approvals can be acquired worldwide based on an ATEX approval. Corresponding national approvals are available on request.

Where are devices with ATEX approval used?

The fields of application for Ex-protected switches include mixing and processing machines in bakeries (flour dust explosion), processing machines in the food industry where spices are mixed (spice dust explosion), sewer manholes, pump stations and sewage treatment plant (explosive gases "fermentation/digester gas"), waste disposal and recycling industry (various sources of dust and gas explosion), automotive industry and wherever paints and lacquers are used (painting booth) in addition to the classic explosion-hazard branches of industry such as the chemical, petrochemical, pharmaceutical industries as well as the coal, gas and oil-producing and processing industries. Mobile equipment and systems such as vacuum cleaners, stacker lift trucks, fans etc. that are used in the above fields of application must exhibit a corresponding ATEX approval. ATEX products are therefore a part of our everyday lives.

Who is responsible for what in Ex applications?

The device or component manufacturer must obtain a type approval certificate (ATEX approval) for these devices and components. The machine manufacturer can acquire his system approval based on these approvals and the declaration of conformity.

The manufacturer of a machine or system that is used in Ex applications must obtain a corresponding system approval for the machines it markets. The entire system must be taken into consideration both from a mechanical as well as from an electrical aspect.

In accordance with the ATEX Operator Directive 1999/92/EC (ATEX137), the operator of technical facilities shall be responsible for avoiding or restricting the formation of explosive atmospheres (primary explosion protection), avoiding effective ignition sources (secondary or design explosion protection) and restricting the effect of an explosion to a safe level (tertiary explosion protection). An explosion protection document describing the implemented measures and hazard assessments is to be compiled.

In addition to foot switches and rope pull switches, our current ATEX-certified product range also includes various standard limit switches, limit switches and miniature limit switches.

Customer-specific individual approvals or approvals for switches and components from the BERNSTEIN range not yet certified are available on request.


Technical data

		EEX	GC	ENM2	F
Electrical data					
Rated insulation voltage	U _i max.	250 V	250 V	250 V	250 V
Rated operating voltage	U _e max.	230 V AC	230 V AC	230 V AC	230 V AC
Conventional thermal current	I _{the}	5 A	5 A	5 A	5 A
Utilisation category: switching capacity		AC 15, 240 V / 3 A; DC 13, 250 V / 0.27 A	AC 15, 240 V / 3 A; DC 13, 250 V / 0.27 A	AC 15, 240 V / 3 A; DC 13, 250 V / 0.27 A	AC 15, 240 V / 3 A; DC 13, 250 V / 0.27 A
Mechanical data					
Mechanical switching frequency		max. 120/min.	max. 50/min.	max. 50/min.	max. 50/min.
Mechanical service life		2 x 10 ⁶ switching cycles	2 x 10 ⁶ switching cycles	2 x 10 ⁶ switching cycles	2 x 10 ⁶ switching cycles
Contact type		1 NC / 1 NO contact (Zb)	1 NC / 1 NO contact (Zb)	1 NC / 1 NO contact (Zb)	2 NC / 2 NO contact (Zb)
B10d		4 mill.	4 mill.	4 mill.	4 mill.
Short-circuit protection		Fuse 4 A gL (Human protection function)	Fuse 4 A gL (Human protection function)	Fuse 4 A gL (Human protection function)	Fuse 4 A gL (Human protection function)
Protection class		II, Insulated	II, Insulated	II, Insulated	II, Insulated
Field of application		II 2G (GAS) / II 2D (DUST)	II 2G (GAS) / II 2D (DUST)	II 2G (GAS) / II 2D (DUST)	II 2G (GAS) / II 2D (DUST)
Admissible ambient temperature		- 20 °C to + 60 °C	- 20 °C to + 60 °C	- 20 °C to + 60 °C	- 20 °C to + 60 °C
Protection class of built-in snap-action switch		IP 66 / IP 67 conforming to IEC/EN 60529	IP 66 / IP 67 conforming to IEC/EN 60529	IP 66 / IP 67 conforming to IEC/EN 60529	IP 66 / IP 67 conforming to IEC/EN 60529
Type of connection		Control line (with ferrules)	Control line (with ferrules)	Control line (with ferrules)	Control line (with ferrules)
Conductor cross sections		4 x 0,75 mm ²	4 x 0,75 mm ²	4 x 0,75 mm ²	4 x 0,75 mm ²
Enclosure		PEI	Aluminium pressure die-casting	Aluminium pressure die-casting	Aluminium pressure die-casting
Cable entry		Cast	1 x cable screw connection M20 x 1,5	1 x cable screw connection M20 x 1,5	1 x cable screw connection M20 x 1,5


Technical data

		SN2	SI2 U2Z AW	SI2 U2Z AK	
Electrical data					
Rated insulation voltage	U _i max.	400 V AC	400 V AC	400 V AC	
Rated operating voltage	U _e max.	240 V	240 V	240 V	
Conventional thermal current	I _{the}	10 A	10 A	10 A	
Utilisation category: Switching capacity		AC 15, U _e / I _e 240 V / 3 A	AC 15, U _e / I _e 240 V / 3 A	AC 15, U _e / I _e 240 V / 3 A	
Mechanical data					
Mechanical Switching frequency		≤ 60/min.	≤ 10/min.	≤ 10/min.	
Mechanical service life		10 x 10 ⁶ switching cycles	2 x 10 ⁶ switching cycles	2 x 10 ⁶ switching cycles	
Actuation		Spindle-mounted lever (Zn-Al), Roller (thermoplastic)	Roller lever (St)	Lever (St)	
Ambient temperature		- 20 °C to + 80 °C	- 20 °C to + 60 °C	- 20 °C to + 60 °C	
Contact type		1 NC / 1 NO contact	2 NC / 2 NO contact (Zb)	2 NC / 2 NO contact (Zb)	
B10d		20 mill.	4 mill.	4 mill.	
Short-circuit protection		Fuse 2 A gL/gG	Fuse 10 A gL/gG	Fuse 10 A gL/gG	
Protection class		I	I	I	
Field of application		II 2D (DUST)	II 2D (DUST)	II 2D (DUST)	
Surface temperature T		85 °C	80 °C	80 °C	
Protection class		IP 65 conforming to IEC/EN 60529	IP 65 conforming to IEC/EN 60529	IP 65 conforming to IEC/EN 60529	
Type of connection		Contact screws	Screw connections	Screw connections	
Conductor cross sections		Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	Single-wire 0.5 – 1.5 mm ² or Stranded wire with ferrule 0.5 – 1.5 mm ²	
Enclosure		AL-Aluminium pressure die-casting	Cast iron	Cast iron	
Cable entry		3 x M20 x 1.5	3 x M20 x 1.5	3 x M20 x 1.5	
Standards					
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1 EN 60079-0, DIN EN 60079-0 EN 60079-1, DIN EN 60079-1 EN 60079-39, DIN EN 60079-31 Directive 94/9 EG (ATEX 95)					

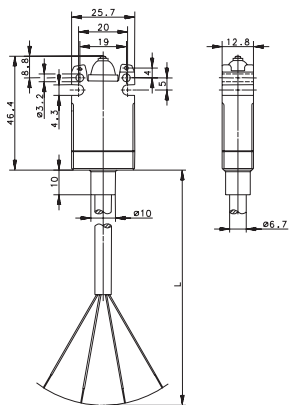EEX W




EEX RH

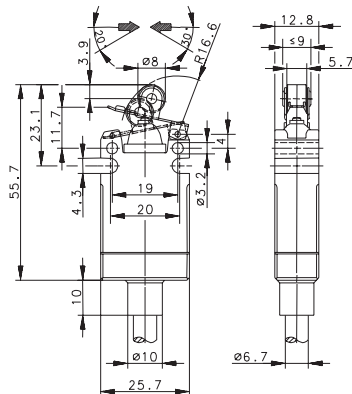


2 meter connection cable

6090153002
EEX-SU1Z W -2M-




6090148022
EEX-SU1Z RH -2M-




5 meter connection cable

6090148024
EEX-SU1Z RH -5M-




9 meter connection cable

6090153005
EEX-SU1Z W -9M-



6090148025
EEX-SU1Z RH -9M-



EX certification

II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

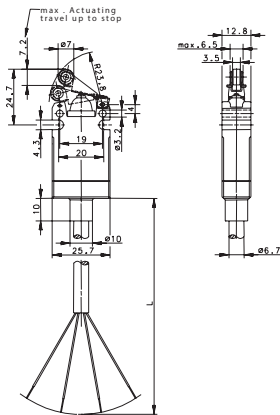
II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

Certificates


TÜV 03 ATEX 2021X

TÜV 03 ATEX 2021X


EEX RHL




6090149027
EEX-SU1Z RHL -2M-




6090149029
EEX-SU1Z RHL -5M-




EEX UH

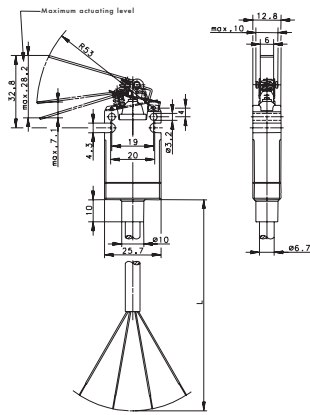


6090146012
EEX-SU1 UH -2M-




6090146014
EEX-SU1 UH -5M-




EEX FH

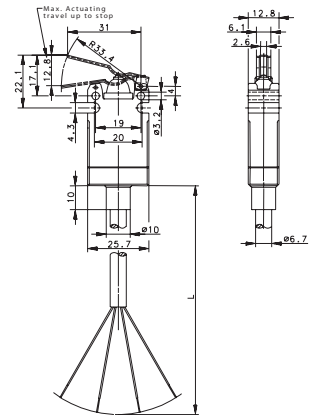

6090145007
EEX-SU1Z FH -2M-



6090145010
EEX-SU1Z FH -9M-



Ex II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

Ex II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

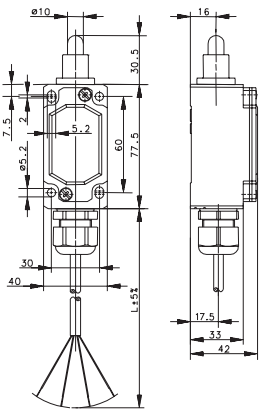
Ex II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

TÜV 03 ATEX 2021X


TÜV 03 ATEX 2021X

TÜV 03 ATEX 2021X

ENM2 IW




ENM2 HW

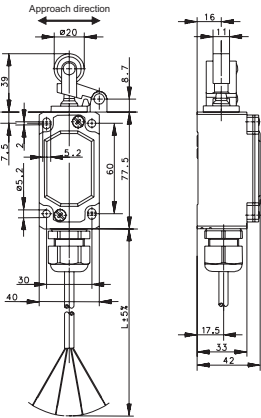


2 meter connection cable

6097152052
ENM2-SU1Z EX IW -2M-




6097171072
ENM2-SU1Z EX HW -2M-




5 meter connection cable

6097152054
ENM2-SU1Z EX IW -5M-




6097171074
ENM2-SU1Z EX HW -5M-




9 meter connection cable

6097152055
ENM2-SU1Z EX IW -9M-



6097171075
ENM2-SU1Z EX HW -9M-



EX certification

 II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

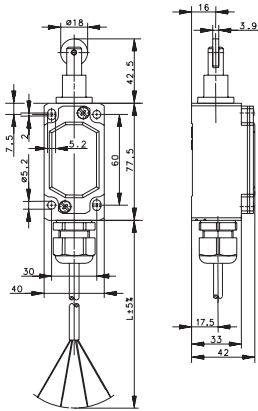
 II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

Certificates


TÜV 03 ATEX 2021X

TÜV 03 ATEX 2043X


ENM2 RIW




6097167062
ENM2-SU1Z EX RIW -2M-



6097167064
ENM2-SU1Z EX RIW -5M-




6097167065
ENM2-SU1Z EX RIW -9M-




Ex II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

TÜV 03 ATEX 2043X

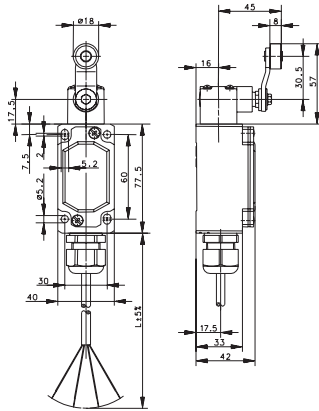
ENM2 AHT




6097185082
ENM2-SU1Z EX AHT -2M-



6097185084
ENM2-SU1Z EX AHT -5M-




6097185085
ENM2-SU1Z EX AHT -9M-




Ex II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

TÜV 03 ATEX 2043X

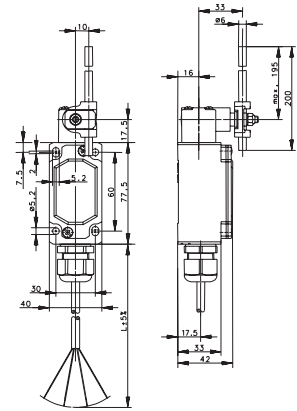
ENM2 AD




6097187092
ENM2-SU1 EX AD -2M-



6097187094
ENM2-SU1 EX AD -5M-




6097187095
ENM2-SU1 EX AD -9M-




Ex II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

TÜV 03 ATEX 2043X

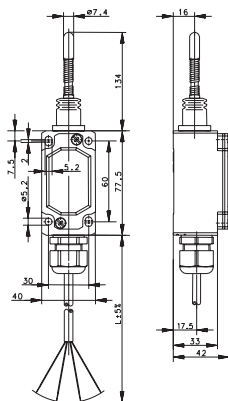ENM2 FF




ENM2 VTW

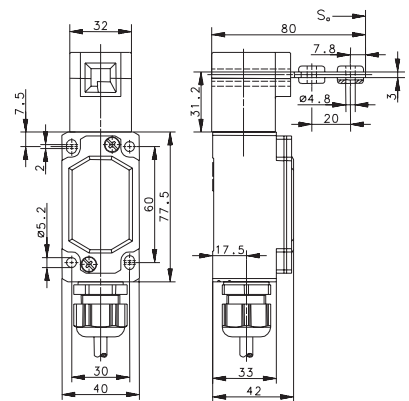


2 meter connection cable

6097190097
ENM2-SU1 EX FF -2M-




5 meter connection cable

6097190099
ENM2-SU1 EX FF -5M-




6197100010
ENM2-SU1Z EX VTW -5M-



9 meter connection cable

6097190100
ENM2-SU1 EX FF -9M-



EX certification

II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db


II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

Certificates


TÜV 03 ATEX 2043X

TÜV 03 ATEX 2043X

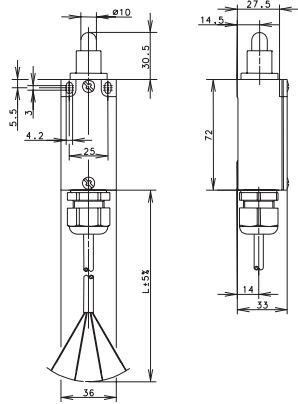
GC IW




6092152002
GC-SU1Z EX IW -2M-



6092152004
GC-SU1Z EX IW -5M-




6092152005
GC-SU1Z EX IW -9M-




II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

TÜV 03 ATEX 2043X

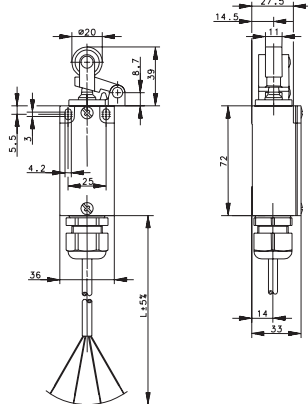
GC HW



6092171024
GC-SU1Z EX HW -5M-




6092171025
GC-SU1Z EX HW -9M-




II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

TÜV 03 ATEX 2043X

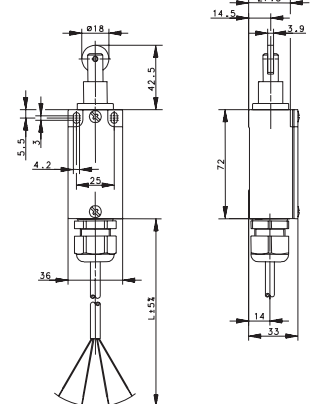
GC RIW



6092167012
GC-SU1Z EX RIW -2M-




6092167015
GC-SU1Z EX RIW -9M-




II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

TÜV 03 ATEX 2043X

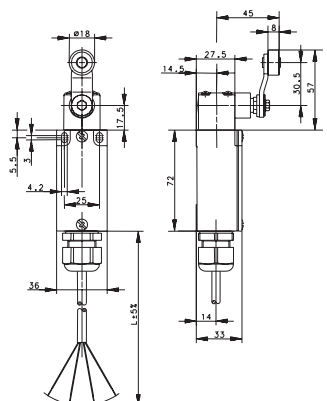GC AHT




F1 UN

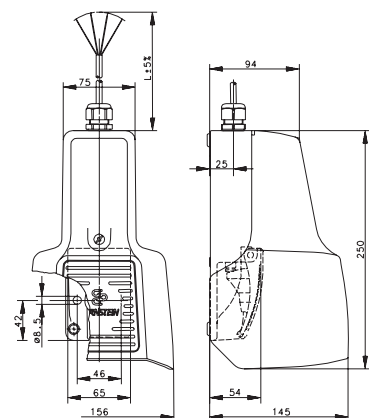

2 meter connection cable


6092185032
GC-SU1Z EX AHT -2M-




6096197017
F1-SU1Z EX UN -2M-

9 meter connection cable

Timing diagram for GC-SU1Z EX AHT -9M- showing switching tolerance. The diagram illustrates a signal transition from 52 to 30 and back to 52. The switching tolerance is indicated as 15°.



EX certification






 II 2G Ex d IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

Certificates

TÜV 03 ATEX 2043X

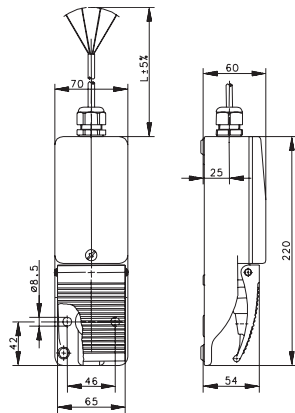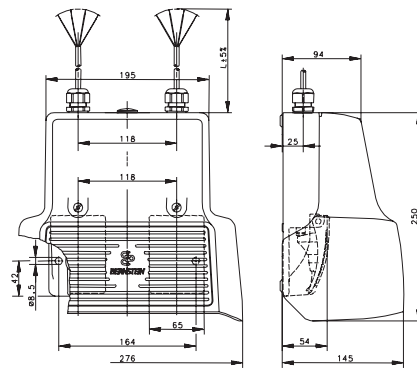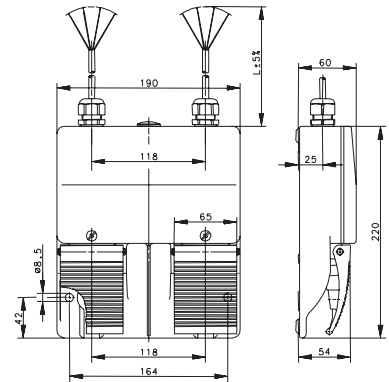TÜV 03 ATEX 2043X

F1

F2 UN

F2

6096198022
 F2-SU1Z/SU1Z EX -2M-

6096198014
 F1-SU1Z EX -5M-

6096197029
 F2-SU1Z/SU1Z EX UN -5M-

 II 2G Ex d IIC T6 Gb
 II 2D Ex tb IIIC T80°C Db

 II 2G Ex d IIC T6 Gb
 II 2D Ex tb IIIC T80°C Db

 II 2G Ex d IIC T6 Gb
 II 2D Ex tb IIIC T80°C Db

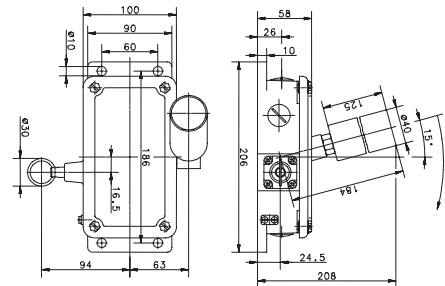

TÜV 03 ATEX 2043X

TÜV 03 ATEX 2043X

TÜV 03 ATEX 2043X


Explosion-protected metal-enclosed switch SN2

Series SI2




1 NC /1 NO contact

6193285001
SN2-SU1Z AH EXD 180 Gr.



2 NC /2 NO contacts

6091295025
SI2-U2Z AW EXD



EX certification

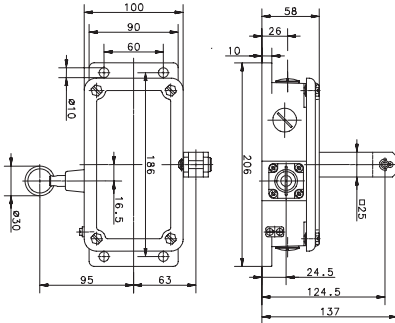
II 2 D Ex tb IIIC T85 °C

II 2D Ex tb IIIC T80°C Db


Certificates

IBExU 10 ATEX 1024

IBExU 13 ATEX 1115

Series SI2


6091288024
SI2-U2Z AK EXD




II 2D Ex tb IIIC T80°C Db

IBExU 13 ATEX 1115

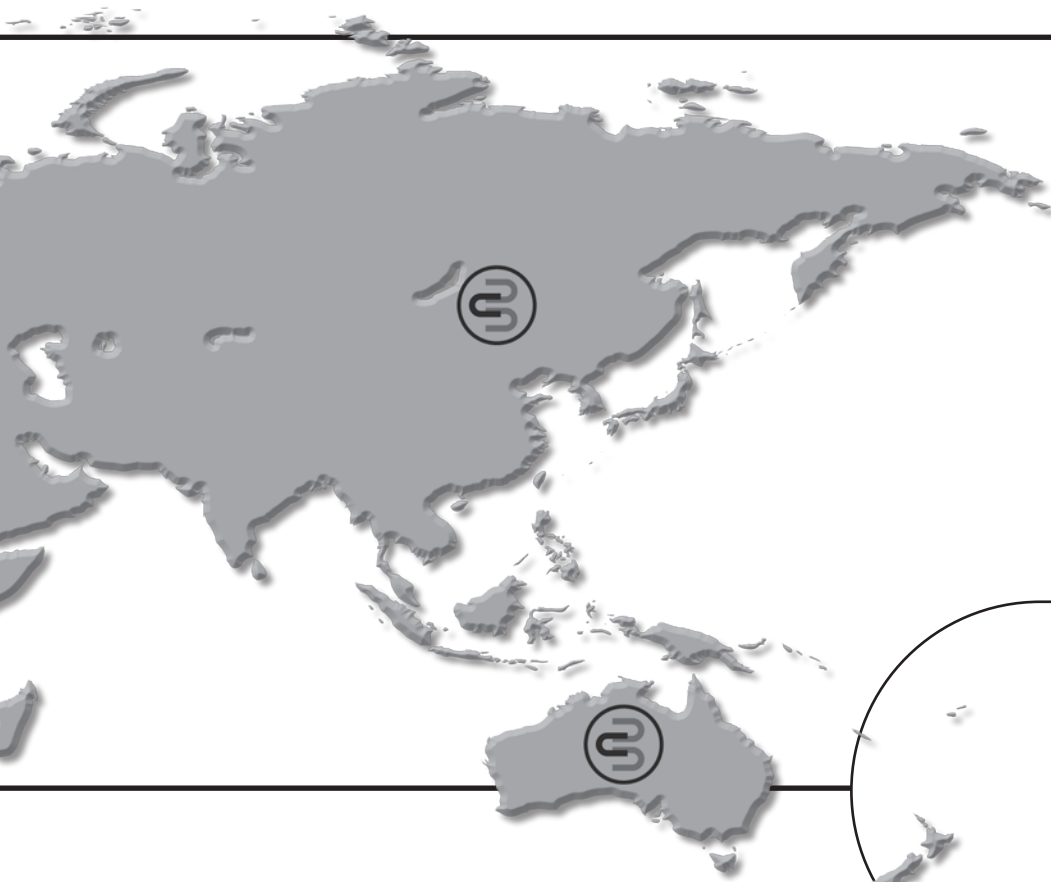Worldwide Available







**Switch systems –
Economy meets safety**



**Sensor systems –
Compact intelligence**



**Enclosure systems –
Function and design**

www.bernstein.eu

Contact

International Headquarters BERNSTEIN AG

Hans-Bernstein-Str. 1
32457 Porta Westfalica
Phone +49 571 793-0
Fax +49 571 793-555
info@de.bernstein.eu
www.bernstein.eu

Denmark

BERNSTEIN A/S
Phone +45 7020 0522
Fax +45 7020 0177
info@dk.bernstein.eu

France

BERNSTEIN S.A.R.L.
Phone +33 1 64 66 32 50
Fax +33 1 64 66 10 02
info@fr.bernstein.eu

Italy

BERNSTEIN S.r.l.
Phone +39 035 4549037
Fax +39 035 4549647
info@it.bernstein.eu

United Kingdom

BERNSTEIN Ltd
Phone +44 1922 744999
Fax +44 1922 457555
info@uk.bernstein.eu

Austria

BERNSTEIN GmbH
Phone +43 2256 62070-0
Fax +43 2256 62618
info@at.bernstein.eu

Switzerland

BERNSTEIN (Schweiz) AG
Phone +41 44 775 71-71
Fax +41 44 775 71-72
info@ch.bernstein.eu

Hungary

BERNSTEIN Kft.
Phone +36 1 4342295
Fax +36 1 4342299
info@hu.bernstein.eu

China

**BERNSTEIN Safe Solutions
(Taicang) Co., Ltd.**
Phone +86 512 81608180
Fax +86 512 81608181
info@bernstein-safesolutions.cn