



**Inductive Sensors**  
with IO-Link Interface

# IO-Link

## Benefits and features

IO-Link is the first international and manufacturer-independent standardised (IEC61131-9) communication interface that enables consistent communication from the sensor to the PLC.

A point-to-point connection enables not only the transmission of the switching signal, but also parameter, diagnostic, and communication data.

### Flexible programming and monitoring



- Sensor output configurable as NO or NC
- Flexible teach-in of the switch-on and switch-off point up to the maximum switching distance of the sensor
- Monitoring of the operating hours since starting the system
- Integrated counting of switching operations

### Simple commissioning and fast maintenance



- Simple integration into existing connection structures
- No high wiring costs due to use of M8 and M12 standard plug connections and unshielded 3-wire standard cables

### Spare parts stock



- Reduction of spare stock due to fast configuration of standard sensors
- Flexible use via SIO and IO-Link mode

### Manufacturer and fieldbus independent





- Fieldbus-independent via appropriate IO-Link master
- The standardisation enables manufacturer-independent integration

### Self-diagnosis



- Wire breakage or short-circuit are immediately detected by the master
- Critical internal voltages are detected in IO-Link mode

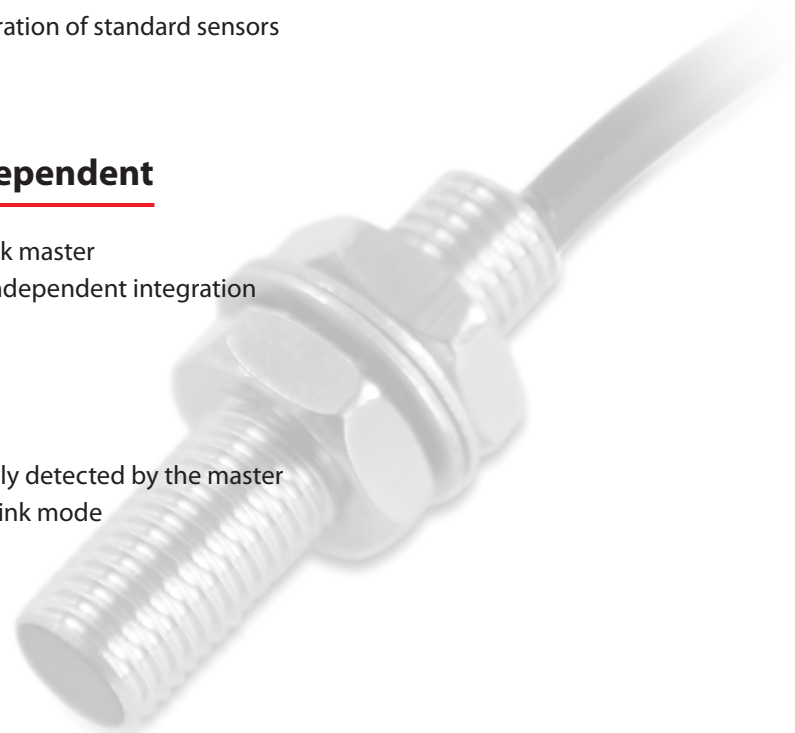

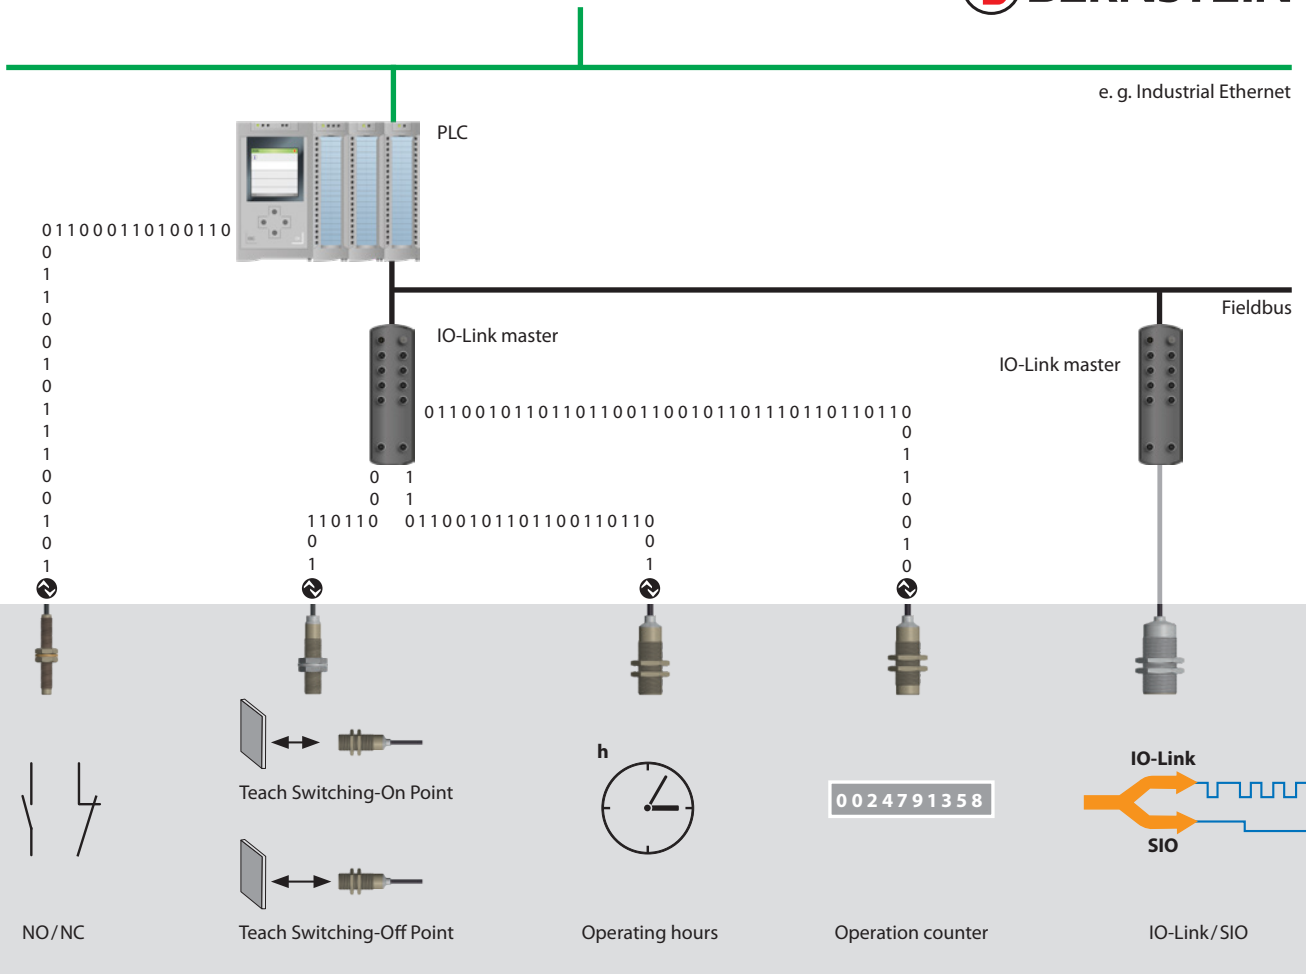

Type	Output	Switching function	Connection	Installation	Switching distance	Article number	Designation
M8	PNP	NO	Connector M8	Flush	1 mm	6532942003	KIB-M08PS/001-KLSM8I
M8	PNP	NC	Connector M8	Flush	1 mm	6532742003	KIB-M08PÖ/001-KLSM8I
M8	PNP	NO	Connector M8	Non-flush	2 mm	6532942004	KIN-M08PS/002-KLSM8I
M8	PNP	NC	Connector M8	Non-flush	2 mm	6532742004	KIN-M08PÖ/002-KLSM8I
M12	PNP	NO	Connector M12	Flush	2 mm	6532943002	KIB-M12PS/002-KLS12I
M12	PNP	NC	Connector M12	Flush	2 mm	6532743002	KIB-M12PÖ/002-KLS12I
M12	PNP	NO	Connector M12	Non-flush	4 mm	6532944002	KIN-M12PS/004-KLS12I
M12	PNP	NC	Connector M12	Non-flush	4 mm	6532744002	KIN-M12PÖ/004-KLS12I
M18	PNP	NO	Connector M12	Flush	5 mm	6532905004	KIB-M18PS/005-KLS12I
M18	PNP	NC	Connector M12	Flush	5 mm	6532705004	KIB-M18PÖ/005-KLS12I
M18	PNP	NO	Connector M12	Non-flush	10 mm	6532906004	KIN-M18PS/008-KLS12I
M18	PNP	NC	Connector M12	Non-flush	10 mm	6532706004	KIN-M18PÖ/008-KLS12I
M30	PNP	NO	Connector M12	Flush	10 mm	6532907004	KIB-M30PS/010-KLS12I
M30	PNP	NC	Connector M12	Flush	10 mm	6532707004	KIB-M30PÖ/010-KLS12I
M30	PNP	NO	Connector M12	Non-flush	20 mm	6532908004	KIN-M30PS/015-KLS12I
M30	PNP	NC	Connector M12	Non-flush	20 mm	6532708004	KIN-M30PÖ/015-KLS12I

All sensors are also available in shortened housing and/or with cable outlet

**We are also able to supply you with customised versions.**



## Contact

### International Headquarters BERNSTEIN AG

Hans-Bernstein-Str. 1  
D-32457 Porta Westfalica  
Phone +49 571 793-0  
Fax +49 571 793-555  
info@de.bernstein.eu  
www.bernstein.eu

### Denmark BERNSTEIN A/S

Phone +45 7020 0522  
Fax +45 7020 0177  
info@dk.bernstein.eu

### France BERNSTEIN S.A.R.L.

Phone +33 1 64 66 32 50  
Fax +33 1 64 66 10 02  
info@fr.bernstein.eu

### Italy BERNSTEIN S.r.l.

Phone +39 035 4549037  
Fax +39 035 4549647  
info@it.bernstein.eu

### United Kingdom BERNSTEIN Ltd

Phone +44 1922 744999  
Fax +44 1922 457555  
info@uk.bernstein.eu

### Austria BERNSTEIN GmbH

Phone +43 2256 62070-0  
Fax +43 2256 62618  
info@at.bernstein.eu

### Switzerland BERNSTEIN (Schweiz) AG

Phone +41 44 775 71-71  
Fax +41 44 775 71-72  
info@ch.bernstein.eu

### Hungary BERNSTEIN Kft.

Phone +36 1 4342295  
Fax +36 1 4342299  
info@hu.bernstein.eu

### China BERNSTEIN Safe Solutions (Taicang) Co., Ltd.

Phone +86 512 81608180  
Fax +86 512 81608181  
info@bernstein-safesolutions.cn

[www.bernstein.eu](http://www.bernstein.eu)